
WEICON Adhesive FINDER
www.adhesive-finder.com
The right ADHESIVE in a CLICK

WEICON®

WEICON Solutions for the

# Building Trades

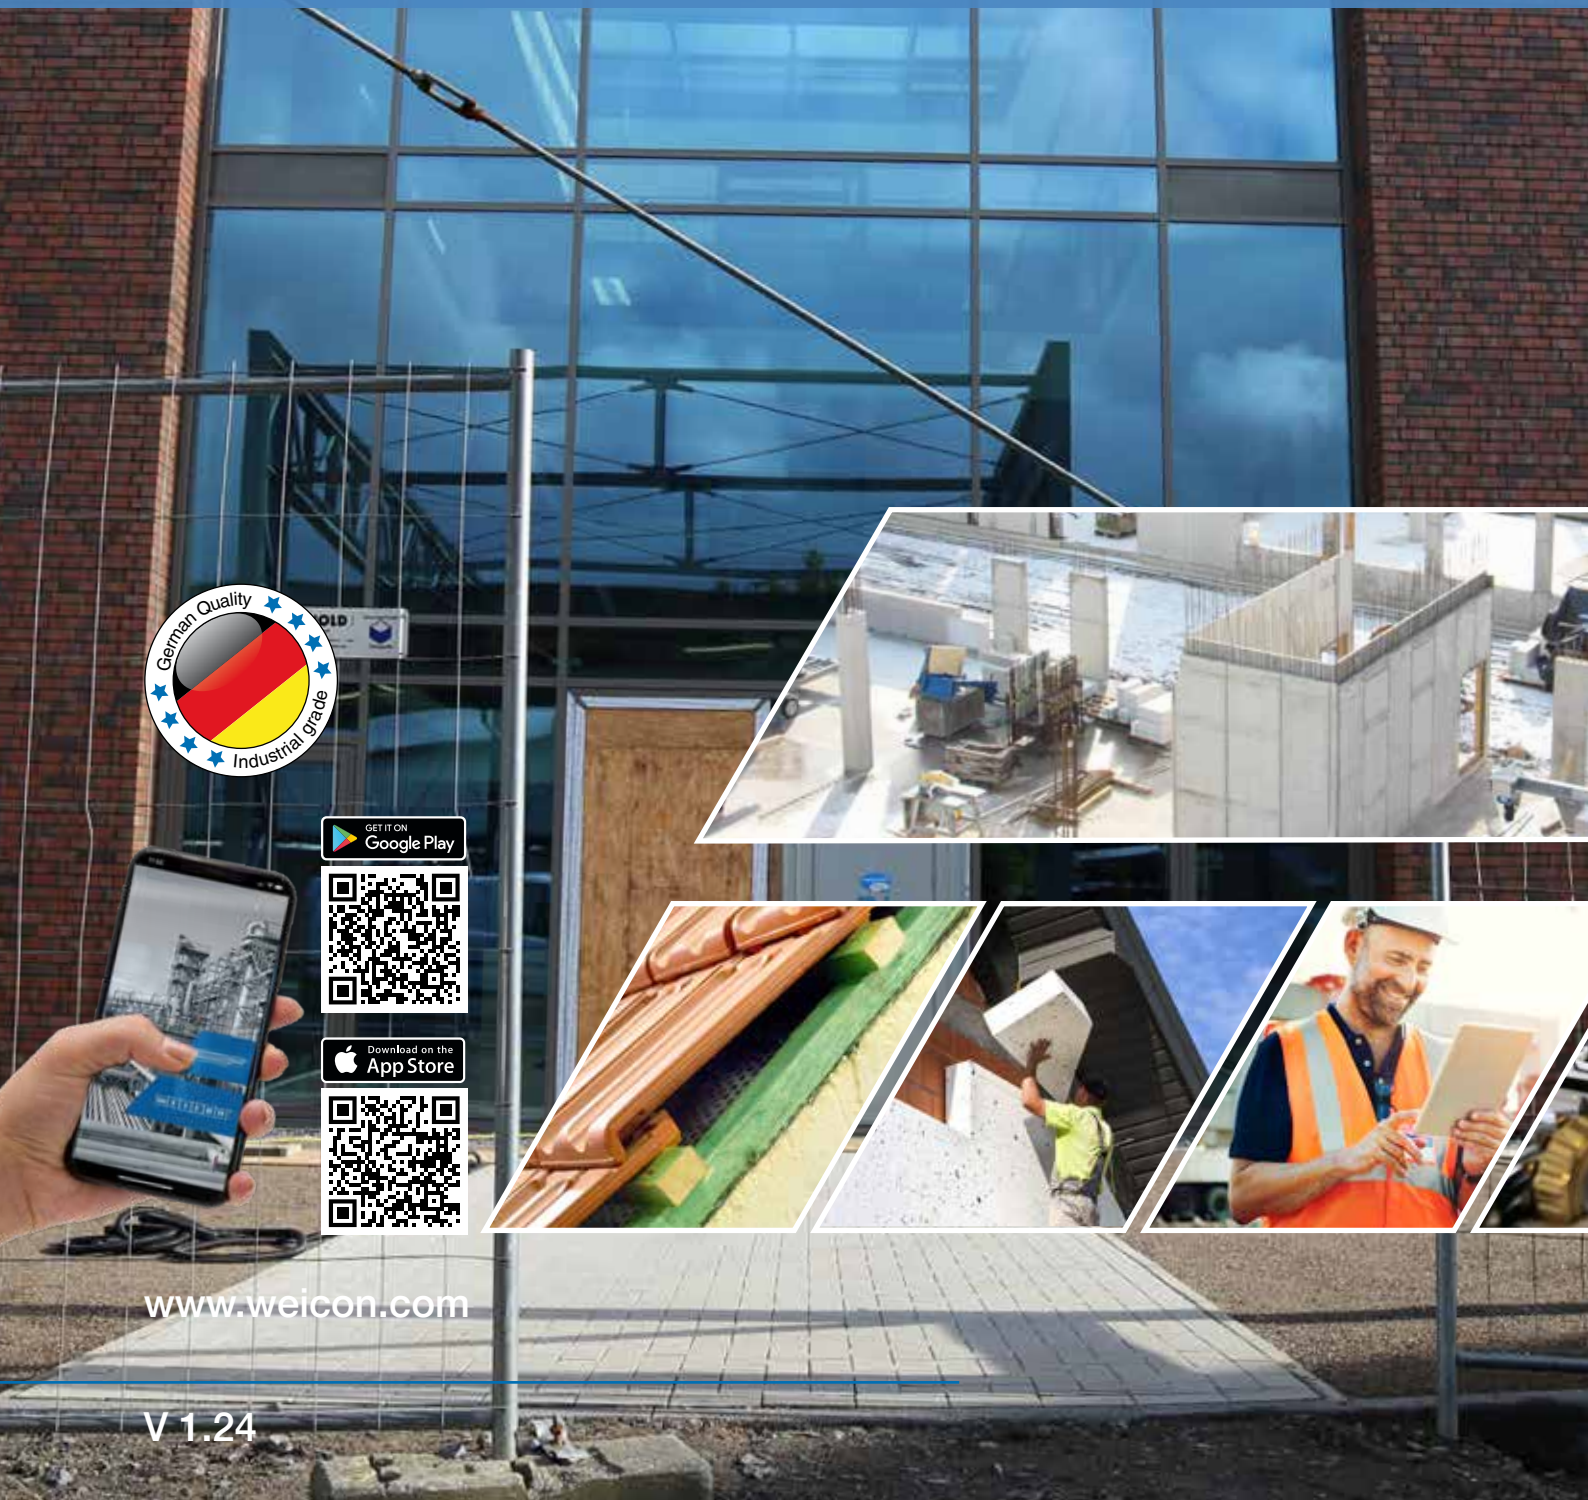


www.weicon.com

V 1.24




# Technical Sprays and Liquids

Technical sprays and technical liquids are used in almost all industrial areas. They serve for care and protection of surfaces, for cleaning and degreasing, lubrication, dissolving and separating and they are essential parts of our daily work.

## Cleaner Spray S

- powerful
- evaporates without residues
- non-greasy

500 ml ✓ 10000147 | 5 L ✓ 10000347

## Surface Cleaner

- for the pretreatment of bonding surfaces
- evaporates quickly without residues
- for metal and plastic

400 ml ✓ 10024313 | 5 L ✓ 10025288

## Plastic-Cleaner

- cleans, degreases and evaporates without leaving residues
- degreases and cleans sensitive surfaces

500 ml ✓ 10005207

## Multi Foam

- powerful universal cleaner for residue-free cleaning
- cleans many different surfaces such as metal, plastic, glass, ceramics or lacquered and coated surfaces

400 ml ✓ 10000144

## Citrus Cleaner

pH - neutral · Professional Quality · pH - neutral

- universal cleaner based on citrus peel extracts
- cleans machines and systems, precision engineering components and precision mechanisms

400 ml ✓ 10032019 | 5 L ✓ 10033568

## Visor Cleaner

- cleaner on the basis of highly active organic solvents
- antistatic and anti-reflective
- reduces glaring and improves the view

200 ml ✓ 10029663



## Zinc Spray

NSF Nonfood Compounds Program Listed R2 Registration 156012

- long-term cathodic corrosion protection for all metal surfaces
- resistant protective layer, even under extreme weather and environmental conditions
- >1050 hours salt spray test according to DIN EN ISO 9227

400 ml ✓ 10000016




## Zinc Spray bright grade

NSF Nonfood Compounds Program Listed R2 Registration 156013

- long-term cathodic corrosion protection
- bright colour shade matching hot-dip galvanization
- >550 hours salt spray test according to DIN EN ISO 9227

400 ml ✓ 10000047




## Sealant and Adhesive Remover

- removes residues of hardened sealants and adhesives
- removal of old paints and lacquers

400 ml ✓ 10026705

## Fitting Spray

- care and maintenance product with high adhesive strength
- free of silicones, resins and solvents
- special capillary action and water-repellent properties
- reduces friction and wear

200 ml ✓ 10028235

## Metal-Fluid

- for matte and polished surfaces
- for stainless steel, ceramic, glass, plastic and wood
- NSF registration

400 ml ✓ 10016338 | 5 L ✓ 10016345

NSF Nonfood Compounds Program Listed A7;C1 Registration 135124

NSF Nonfood Compounds Program Listed A7;C1 Registration 135125



WEICON Solutions for the

# Building Trades

## Technical Sprays and Liquids




### Allround Sealing Spray

- sprayable plastic with high adhesive strength
- for the sealing of cracks racks and seams
- paintable
- for indoor and outdoor use

| 400 ml | 400 ml | 400 ml |
|---|---|---|
| 10052243 | 10049571 | 10052245 |
| white | grey | black |

### PTFE-Spray

- dry lubricant
- temperature-resistant from -180°C to +250°C *(-292°F to +482°F)*
- silicone-free

400 ml
10000151

### Silicone Spray

- sliding and release agent
- provides a durable separation layer
- high sliding effect

400 ml
10000152

### Corro-Protection

- corrosion protection of metal parts for indoor storages
- storage of tools and precision components made of metal
- transparent, TÜV-approved protection layer

| 400 ml | 5 L |
|---|---|
| 10000157 | 10000787 |

### Aluminium-Spray A-100

- abrasion-resistant
- excellent corrosion protection
- high-grade corrosion protection for all metal surfaces

400 ml
10000050

### Aluminium-Spray A-400

- highest brilliancy
- resistant to many diluted acids and lyes
- high-grade corrosion protection for all metal surfaces

400 ml
10000051

### Brass Spray

- metallic coating with a high brass content
- colour shade typical of brass
- for the protection and optical refinement of various materials

400 ml
10000141

### Copper Spray

- for protective and decorative coatings
- high-grade
- effective
- weather-resistant

400 ml
10000140



### Double Nozzle

Only for the 500 ml product




### W 44 T® Multi-Spray

- lubricates mechanical precision devices
- repels moisture
- protects against corrosion

| 400 ml | 500 ml | 5 L |
|---|---|---|
| 10001023 | 10039121 | 10007793 |




# WEICONLOCK® - Anaerobic Adhesives and Sealants

### Rust Converter
- rust converter and base coat in one process
- protects from corrosion and is suitable for internal and external use

400 ml ✓
10047458

### Rust Shock
- the „chemical wrench“
- free of mineral oil, grease and silicone
- loosen threaded joints in seconds

400 ml ✓
10000143

### Rust Protection 2000 PLUS
- high corrosion and weathering resistance

400 ml ✓ 10021353 charcoal-grey
400 ml ✓ 10021354 silver-grey

### Stainless Steel bright grade
- with stainless steel pigments
- optics correspond to treated stainless steel look
- temperature resistant from -50°C to +300°C *(-58°F to +572°F)*

400 ml ✓
10032003

### Stainless Steel Spray
- extremely high chemical resistance
- temperature-resistant from -50°C to +300°C *(-58°F to +572°F)*

400 ml ✓
10000139

### Stainless Steel Care Spray
- for brushed and polished stainless steel surfaces indoors and outdoors
- pH-neutral

400 ml ✓
10012800

### Adhesive Spray
- universal use
- bonds light materials

500 ml ✓
10000162

### Adhesive Spray extra strong
- for strong and permanent adhesive bondings
- for rough and uneven surfaces
- adjustable to either vertical or horizontal output of the adhesive

500 ml ✓
10024662






# Surface and Anti-Corrosion Coating

### Brushable Zinc Paint*
**Efficient cathodic corrosion protection**




375 ml ✓ 10000322
750 ml ✓ 10000321
2.5 L ✓ 10000403

### Brushable Zinc Coating*
**Colour matching hot-dip galvanization**




375 ml ✓ 10000327
750 ml ✓ 10000328
2.5 L ✓ 10000404



Do not spray with WEICON WSD 400 and WSP 1500. Only apply with a paint brush or roller.



WEICON Solutions for the

# Building Trades

## Plastic-Bond

WEICON Plastic-Bond is a solvent-free structural adhesive with very good adhesion to plastics, aluminum, steel and many other materials. The adhesive is suitable for static as well as dynamic loads, has a high impact and peel strength and a maximum gap filling capacity of 5 mm.

- excellent adhesion to plastics
- high strength
- shock-resistant
- impact-resistant



24 ml
10018558



## Aluminium Minute Adhesive

WEICON Aluminium Minute Adhesive is an odourless, two-component epoxy adhesive filled with aluminium. It cures fast at room temperature and practically without shrinkage. After curing, the adhesive can be machined (filing, drilling, milling).

Aluminium Minute Adhesive is gap-filling and non-dripping (thixotropic) and shows very high tensile, impact and peel strength. The adhesive is particularly suitable for bonding aluminium and other light metals. It can be used for filling cracks and holes on aluminium housings, for example, and for repairing light alloy wheels. In order to achieve optimal adhesion, the bonding surfaces should be dry and free from grease or soilings. Scraping or sanding the surfaces before cleaning additionally improves adhesion.

- gap-filling
- fast-curing
- high peel and impact strength

24 ml
10051229



### Mixing Nozzle Quadro

Optionally, all Plastic-Bond, Aluminium Minute Adhesive and Epoxy Minute Adhesives can also be processed with the Mixing Nozzle Quadro.



10005236

## Epoxy Adhesives

### Fast-Metal Minute Adhesive

- highly filled, pasty
- very short pot life
- fast-curing



24 ml
10000133

### Epoxy Minute Adhesive

- viscous
- self-levelling
- fast-curing



24 ml
10007785



-50°C to +145°C
*(-58°F to +293°F)*



## SI 303-31 Pipe and Thread Sealing

**Highly viscous, low-strength, max. gap 0.50 mm, -40°C to +180° (*-104°F to +356°F*)**

Low-strength, permanently elastic pipe and thread sealing for cold water-carrying plastic and metal pipes. It is suitable for use as a sealant in sensitive areas, like the food industry or the drinking water sector. Resilient, though the adhesive remains elastic and absorbs shock loads.

SI 303-31 is an acetoxy-curing 1-component silicone sealant with a good chemical resistance diluted acids and lyes. The sealant is suitable for plastic threads and plastic / metal combinations and has a high notch and tear strength. SI 303-31 has a very good weathering, ageing and UV resistance.



85 ml
10050555
Tube

Approval for contact with drinking water according to the KTW guideline of the Federal Environmental Agency Germany..



For further packing sizes and more detailed product information, please visit our website www.weicon.com

# Assembly Pastes



All kinds of influencing factors, such as moisture and friction, lead to damage due to corrosion, seizure, and wear on machines and installations.

Extensive repair and maintenance works at considerable costs are the result.

Especially under difficult conditions such as:
- high operating temperatures
- high pressure loads
- open air conditions

where such consequences frequently occur.

## Copper Paste

- protecting, separating and lubricating agent
- for highly stressed parts
- temperature-resistant from -20°C to +1100°C *(-4°F to +2012°F)*



85 g ✓
10047468
Tube

## Anti-Seize

- long-lasting protection against corrosion, seizure and wear
- high-temperature-resistant up to +1.200°C *(+2192°F)*
- exceptionally good separating effect

85 g ✓
10047467
Tube

200 ml ✓
10025465
Press pack

500 g ✓
10028921
Brush top

10 kg ✓
10000182
Bucket




## Anti-Seize High-Tech

NSF Nonfood Compounds Program Listed H1 Registration 141636

- metal-free
- NSF approval
- temperature-resistant from -40°C to +1400°C *(-40°F to +2552°F)*

85 g
10047469





# Silicone Grease

- very good compatibility to plastics, especially for applications on valves, fittings and sealings
- assembly aid for O-rings
- temperature resistance of -50°C to +200°C




5 g ✓
10053151
Tube

85 g ✓
10050566
Tube

400 g ✓
10052326
Cartridge

450 g ✓
10050558
Can

1 kg ✓
10050563
Can

5 kg ✓
10051113
Bucket

25 kg ✓
10051118
Bucket

NSF Nonfood Compounds Program Listed H1 Registration 150645

**BAM tested and safety-tested according to - according to leaflet M 031-1**
"List of nonmetallic materials supporting document to code of practice M 034e "Oxygen" (DGUV Information 213-074)




Greasing of a plastic gear



WEICON Solutions for the

# Building Trades

## WEICONLOCK® - *Anaerobic Adhesives and Sealants*

Especially made for economical threadlocking, retaining and sealing of threaded, cylindrical and pipe assemblies. After the curing, it provides a shock- and vibration-resistant joint with excellent resistance to chemicals and solvents from -60°C to +200°C *(-76°F to +392°F)*.

### AN 301-70

- threadlocking
- NSF approval

medium viscosity
high strength
hard to disassemble

20 ml ✓
10026826



### AN 302-43

- threadlocking
- thread connections up to M 36
- drinking water and DVGW approval

higher viscosity
medium strength
disassembly with normal tools

10 ml ✓ 10030474
20 ml ✓ 10016419

### AN 305-18

- flange sealing

high viscosity
high strength
hard to disassemble

50 ml ✓ 10019941
200 ml ✓ 10019999
300 ml ✓ 10019591

### AN 305-42

- hydraulic and pneumatic sealing
- DVGW approval

medium viscosity
medium strength
disassembly with normal tools

50 ml ✓ 10017877
200 ml ✓ 10020001

### AN 305-72

- pipe and flange sealing with PTFE
- immediate sealing effect
- drinking water and DVGW approval

high viscosity
high strength
hard to disassemble

50 ml ✓ 10019943
200 ml ✓ 10020003
300 ml ✓ 10026707

### AN 306-48

- retaining cylindrical assemblies
- drinking water approval
- BAM*

medium viscosity
high strength
hard to disassemble

50 ml ✓ 10017893

**BAM tested and safety-related evaluated-according to leaflet M 031-1**
"List of nonmetallic materials supporting document to code of practice M 034e "Oxygen" (DGUV Information 213-074)



### CA-Activator Spray

- accelerates the curing time of WEICON Contact Cyanoacrylate Adhesives

150 ml ✓ 10000282

## Contact Cyanoacrylate Adhesives

WEICON Contact are solvent-free instant adhesives. They bond various materials, such as metal, glass, wood, plastic, ceramic, leather and rubber within seconds.

### VA 100

- cyanoacrylate adhesive for rubber and plastics
- medium viscosity
- slightly longer curing time

3 g ✓ 10001191
12 g ✓ 10018867
30 g ✓ 10016433

### VA 1401

- cyanoacrylate adhesive for rubber and plastics
- medium viscosity
- fast-curing

12 g ✓ 10018869
30 g ✓ 10016402

### VA 1500

- cyanoacrylate adhesive for rubber and plastics
- high viscosity
- slow-curing

12 g ✓ 10018820
30 g ✓ 10016434

### VA 300

- cyanoacrylate adhesive for rubber and plastics
- higher viscosity
- longer curing time

12 g ✓ 10018819
30 g ✓ 10016510

### VA 30 Black

- cyanoacrylate adhesive for special requirements
- medium viscosity, rubber-filled
- high-temperature-resistant

12 g ✓ 10025827
30 g ✓ 10025824

### Contact GEL

- cyanoacrylate adhesive for special requirements
- pasty (highly thixotropic)
- very slow-curing = enables position correction

20 g ✓ 10002033






# Elastic Adhesives and Sealants

Elastic adhesives and sealants are used today in many areas of industrial production and assembly today. They combine the advantages of adhesive bonding and sealing technology and are used wherever the elasticity and the sealing of a joint are the most important requirements.

## Aqua-Flex

- ideal for wet and moist surfaces
- resistant to freshwater and salt water
- LFGB- und ISEGA-certified

| 310 ml | 310 ml | 310 ml |
|---|---|---|
| 10021673 | 10021678 | 10021677 |
| white | grey | black |



## Flex+bond®

- highly elastic and strong
- LFGB- und ISEGA-certified
- free of silicone

| 85 ml | 85 ml | 85 ml | 85 ml |
|---|---|---|---|
| 10012994 | 10014356 | 10018364 | 10012995 |
| white | black | transparent | grey |




**NEW** Now in a mini tube-shaped bag

- ✓ easier application
- ✓ simple to use
- ✓ improved shelf life — Erhöhte Lagerstabilität +18 Monate months Longer shelf life
- ✓ reduction of packaging waste






# Mounting Tape

## Grey

- for smooth surfaces
- high flexibility
- extremely strong adhesion

85 kg/m

- load bearing capacity 85 kg/m
- 3 m x 19 mm (length x width)
- core size 40 mm

3 m
10050551

## Transparent


- moisture-resistant
- UV-resistant
- strong

80 kg/m

- load bearing capacity 80 kg/m
- 3 m x 19 mm (length x width)
- core size 40 mm

3 m
10050553

Fixing aid in combination with WEICON Adhesives and Sealants.

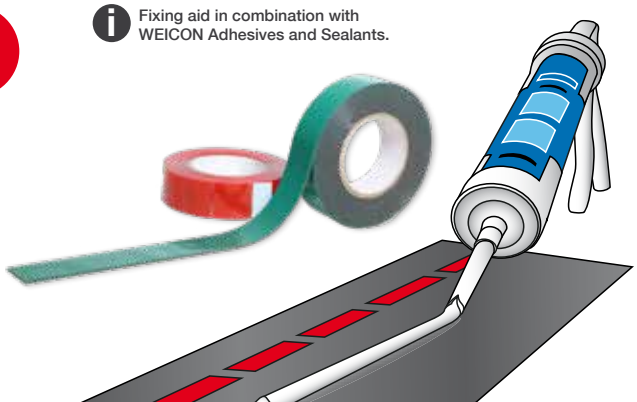



WEICON Solutions for the

# Building Trades

## Elastic Adhesives and Sealants

### Flex 310 M® Classic

- free of isocyanate and solvents
- suitable for universal use
- free of silicone
- LFGB- und ISEGA-certified

| | ▸ 280 ml | ▸ Set | ▸ 200 ml |
|---|---|---|---|
| white | 10104011 | 10104049 | 10057238 |
| grey | 10104007 | 10104053 | 10057240 |
| black | 10103997 | 10104051 | 10057245 |

### Flex 310 M® Crystal

- crystal-clear curing
- good resistance to UV rays
- good ageing stability
- LFGB- and ISEGA-certified

| ▸ 280 ml | ▸ Set | ▸ 200 ml Press pack |
|---|---|---|
| 10104017 | 10104055 | 10057247 |



### Fast-Bond

- fast-curing
- one-component structural and assembly adhesive for universal use on polyurethane basis (PUR)

▸ 310 ml
10015372
beige

### Flex 310 PU

- on polyurethane basis
- sandable
- LFGB- and ISEGA-certified

| | ▸ 280 ml | ▸ Set |
|---|---|---|
| white | 10104873 | 10104876 |
| grey | 10104863 | 10104866 |
| black | 10104883 | 10104886 |

### Flex 310 M® Liquid

- liquid
- self-levelling
- LFGB- and ISEGA-certified

▸ 310 ml
10057733
black

### Special Mixing Nozzle

(For Flex 310 M® 2K)
10027692






### Solar-Flex

- very high initial strength
- free of silicone, isocyanate, halogens and solvents
- temperature-resistant from -40°C to +90°C (-40°F to 194°F)

| | ▸ 280 ml | ▸ Set |
|---|---|---|
| white | 10105046 | 10105049 |
| grey | 10105039 | 10105042 |

### Flex 310 M® 2K

- fast-curing, very strong
- paintable, sandable
- weather-resistant, resistant to UV rays
- free of silicone, isocyanate, or solvents
- non-corrosive

| ▸ 250 ml | ▸ 400 ml |
|---|---|
| 10027733 | 10062232 |
| grey | grey |

### Speed-Flex®

- replaces traditional fixings
- high initial strength; also suitable for vertical surfaces
- for indoor and outdoor applications
- LFGB- und ISEGA-certified

| | ▸ 280 ml | ▸ Set |
|---|---|---|
| white | 10104943 | 10104946 |
| grey | 10104953 | 10104956 |
| black | 10104963 | 10104966 |



### Speed Flex® Crystal

- free of silicones, isocyanates, halogens and solvents
- LFGB- und ISEGA-certified


| ▸ 280 ml | ▸ Set |
|---|---|
| 10104973 | 10104976 |






## Repair Sticks

The simple solution for all repair and maintenance works. Easy to use. Ready to use, can be easily cut into small amounts for minor repairs at any time.

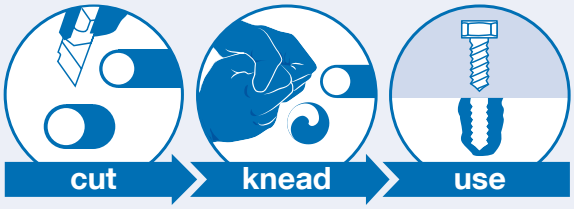


### Copper NSF

Certified to NSF/ANSI 61

- very fast-curing
- colour: copper

| 57 g | 115 g |
|---|---|
| 10010227 | 10006609 |

### Wood

- residual elasticity
- mineral-filled

| 28 g | 56 g |
|---|---|
| 10010237 | 10007717 |

### Plastic NSF

Certified to NSF/ANSI 61

- viscoplastic
- colour: light blue

| 57 g | 115 g |
|---|---|
| 10017301 | 10017334 |

### Steel NSF

Certified to NSF/ANSI 61

- fast-curing
- colour: dark grey

| 57 g | 115 g |
|---|---|
| 10010241 | 10007705 |

### Concrete NSF

Certified to NSF/ANSI 61

- fast-curing
- ceramic-filled

| 57 g | 115 g |
|---|---|
| 10025685 | 10025687 |

### Multi-Purpose NSF

Certified to NSF/ANSI 61

- fast-curing
- mineral-filled

| 57 g | 115 g |
|---|---|
| 10053992 | 10053995 |

### Aqua

- for underwater applications
- ceramic-filled
- ideal for quick repairs on damp and wet surfaces and for underwater applications

| 57 g | 115 g |
|---|---|
| 10008519 | 10006608 |




## WEICON CBC *Chocking Backing Compound*

Special epoxy resin system for the shimming and backfilling of systems difficult to align.

- liquid and self-levelling
- vibration-resistant
- impact- and break-resistant

European Exhibition Award for creativity and innovation

| 3.0 kg (2.0 l) | 10,0 kg (6.6 l) |
|---|---|
| 10045020 | 10045019 |







## Epoxy Resin Putty

WEICON Epoxy Resin Putty is pasty (kneadable), mineral-filled, and temperature-resistant up to +200°C *(392°F)*. It is processed with a mixing ratio of 1:1 and is machinable and overpaintable after curing.

| 100 g | 400 g |
|---|---|
| 10000103 | 10000104 |



## WEICON GMK 2410

GMK 2410 is an adhesive based on polychloroprene (CR) for the high-strength, full-surface and flexible bonding of

**- rubber to rubber**
**- rubber to metal**

WEICON GK 2410 also bonds cellular rubber (e.g. neoprene), PE foam, leather, felt, insulating material, textiles, wood, and many plastics.

- high strength
- for large surfaces
- resistant to humidity




| 185 g | 300 g | 350 g |
|---|---|---|
| 10029662 | 10028908 | 10030358 |
| Tube | Can | Brush top |





WEICON Solutions for the

# Building Trades

WEICON TOOLS®

*No.1 in Form & Funktion*

MESSERSTAHL Qualität aus Solingen

made in Germany

TÜV NORD GS geprüfte Sicherheit

Since 1967 we develop, produce and distribute an extensive range of wire stripping tools. This includes cable strippers, wire strippers, dismantling and multi-functional tools. Our tools have been developed for accurate, fast and safe stripping of all common cable types. They carry the GS seal of TÜV Nord and were developed under the aspects of work safety. The tools are specifically tailored to the needs of professional users, are found in both crafts and industrial use, and are also suitable for domestic use.



selbst ist der Mann – Das Do-it-yourself-Magazin
PRAXISTEST – Kategorie: Ader-Abisolier-Werkzeuge –
SEHR GUT (1,3)
2 Produkte mit SEHR GUT
TESTSIEGER
Ausgabe 04/2018
11 Produkte im Test
www.selbst.de




## Wire Stripper No. 5

- for finely stranded and solid conductors with PVC insulation
- for all common conductors from 0.2 - 6 mm² (24 - 10 AWG)

10101936 LED-Set

10006786 without LED



## Cable Stripper No. S 4-28

- safe due to retractable hook blade
- the blade can be locked in both positions
- completely ergonomic & fully insulated

10021246



## Cable Stripper No. S 4-28 Multi

- stripping function integrated in the housing
- wire stripping of all common round cables of 0.5 und 6 mm²

10030001



## Quadro-Stripper No. 16

- multifunctional with optimized cable routing
- circular and longitudinal cutting - stripping - cutting
- exchangeable hook blade, firmly locked in any position
- anti-slip handle shape

10038853



## Easy Opener®

The ideal tool for material-friendly opening of sensitive devices and for working on clipped housings.

- special tool for the gentle disassembly of sensitive components without damaging the material
- ideal for loosening switches, luminaires or similar components
- slim and filigree design – flexible and stable at the same time
- three surfaces with different material thickness

10049687



**WEICON GmbH & Co. KG (Headquarters)**
Königsberger Str. 255 · DE-48157 Münster
P.O. Box 84 60 · DE-48045 Münster
Germany
phone +49 (0) 251 9322 0
WhatsApp + 49 (0) 251 9322 393
info@weicon.de

**WEICON Middle East L.L.C.**
Jebel Ali Ind Area 1
P.O. Box 118 216 · Dubai
United Arab Emirates
phone +971 4 880 25 05
info@weicon.ae

**WEICON Inc.**
20 Steckle Place · Unit 20
Kitchener · Ontario N2E 2C3 · Canada
phone +1 877 620 8889
info@weicon.ca

**WEICON Kimya Sanayi Tic. Ltd. Şti.**
Orhan Gazi Mahallesi 16. Yol Sokak No: 6
34538 Hadımköy-Esenyurt · Istanbul
Türkiye
phone +90 (0) 212 465 33 65
info@weicon.com.tr

**WEICON Romania SRL**
Str. Podului Nr. 1
547176 Budiu Mic (Targu Mures) · Romania
phone +40 (0) 3 65 730 763
office@weicon.com

**WEICON SA (Pty) Ltd**
Unit No. D1 · Enterprise Village
Capricorn Drive · Capricorn Park
Muizenberg 7945 (Cape Town) · South Africa
phone +27 (0) 21 709 0088
info@weicon.co.za

**WEICON South East Asia Pte Ltd**
7 Soon Lee Street
#01-11 iSPACE · Singapore 627608
phone (+65) 6710 7671
info@weicon.com.sg

**WEICON Czech Republic s.r.o.**
Teplická 305
CZ-417 61 Teplice-Bystřany
Česká republika
phone +42 (0) 417 533 013
info@weicon.cz

**WEICON Ibérica S.L.**
Av. del Camino de lo Cortao, 30
nave 22, San Sebastián de los Reyes
28703 Madrid · Spain
phone +34 (0) 914 7997 34
info@weicon.es

**WEICON Italia S.r.L.**
Via Gelasio Adamoli, 35
16141 Genova · Italy
phone +39 010 2924 871
info@weicon.it

**WEICON Colombia S.A.S**
Calle 19, 43b-64
Medellín · Colombia
phone +57 310 837 37 99
info@weicon.co

**WEICON Australia Pty Ltd**
Lot 9 · Unit 3, 55-65 Christensen Road
Stapylton · QLD 4207 · Australia
phone +61 (0) 452 553 384
info@weicon.com.au

**www.weicon.com**

TÜVRheinland® ZERTIFIZIERT

Management System
ISO 9001:2015
ISO 14001:2015

www.tuv.com
ID 9108636595

German Quality Industrial grade

WEICON Solutions for the

# Building Trades

Art.-No. 10054654

*Distributed by:*

Any product specifications and recommendations given herein must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do warrant the continuously high quality of our products being free from defects in accordance with and subject to our General Sales Conditions. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.