

WEICONLOCK® AN 302-22 Threadlocking



Threadlocking | vibration protection | classified as non-hazardous



- medium viscosity
- low strength
- easy disassembly

Technical Data

Colour	purple
Fluorescent	yes
For thread connections up to	M 36
Viscosity	1.000 mt mPa·s
Gap bridging up to max.	0,2 mm
Breakaway torque	4 - 8 Nm
Prevail torque	2 - 4 Nm
Shear strength Nmm ² (DIN 54452)	3 - 5 N/mm ²
Handling strength	10 - 20 min.
Final strength (100 % strength)	3-6 h
Temperature resistance	-60°C to +150°C
Minimum shelf life	at room temperature 24 mon.
Compressive strength (free cutting steel / grub screw = 8.8)	
M 3x6 max.	1500 bar
M 4x6 max.	1300 bar
M 5x8 max.	1250 bar
M 6x10 max.	1000 bar
M 8x12 max.	600 bar
M 10x16 max.	100 bar


Approvals / Guidelines

ISSA Code	75.628.01/02/03
IMPA Code	815201/02/03

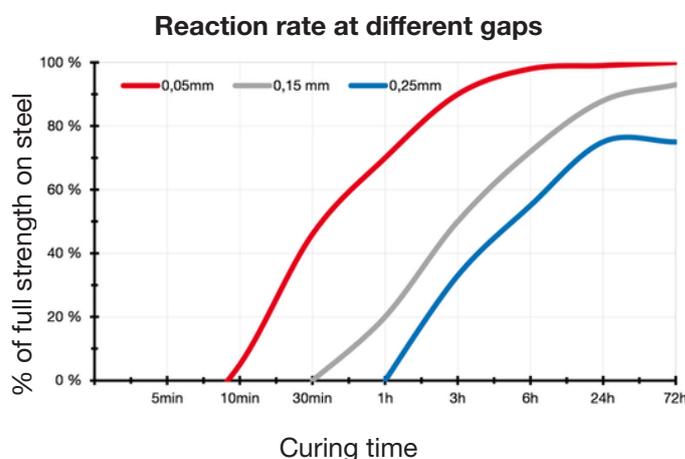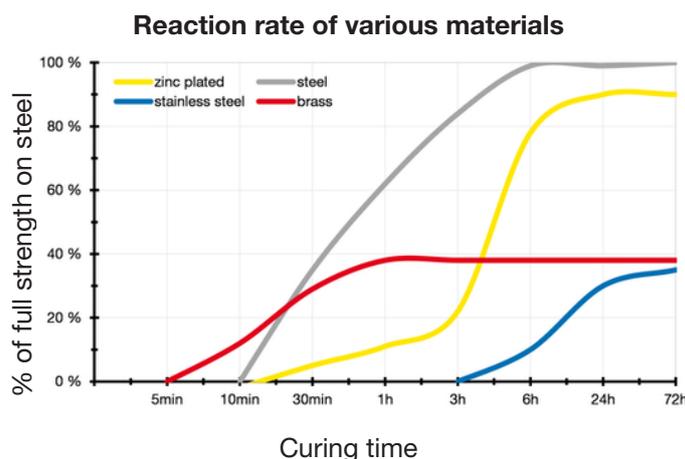

Surface Pre-Treatment

Clean surfaces to be sealed.

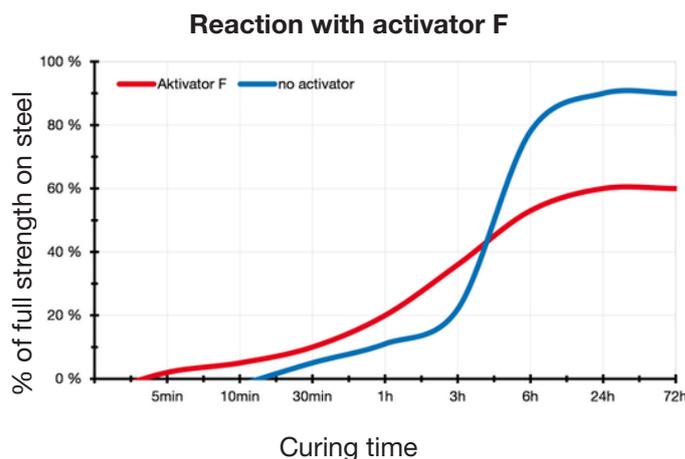

Application

WEICONLOCK is applied evenly straight from the Pen with the help of the dosing tip; avoid direct contact between dosing tip

Note
The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICONLOCK® AN 302-22 Threadlocking

Threadlocking

/metal. For sealing applications, apply WEICONLOCK to the thread in circles. Assemble parts and screw tight. Do not pour any WEICONLOCK back into the bottle that has already come into contact with metal. Even extremely small metal particles cause the adhesive to cure inside the bottle. Therefore, in serial production, the use of dosing devices is recommended.


Storage

Store WEICONLOCK in the unopened original container at room temperature. Avoid sources of heat and direct sunlight. The air inside the packaging helps maintain storage stability.

Available sizes

- 10019885 WEICONLOCK® AN 302-22 Threadlocking, 20 ml, purple
- 10017872 WEICONLOCK® AN 302-22 Threadlocking, 50 ml, purple
- 10019889 WEICONLOCK® AN 302-22 Threadlocking, 200 ml, purple


Heat aging

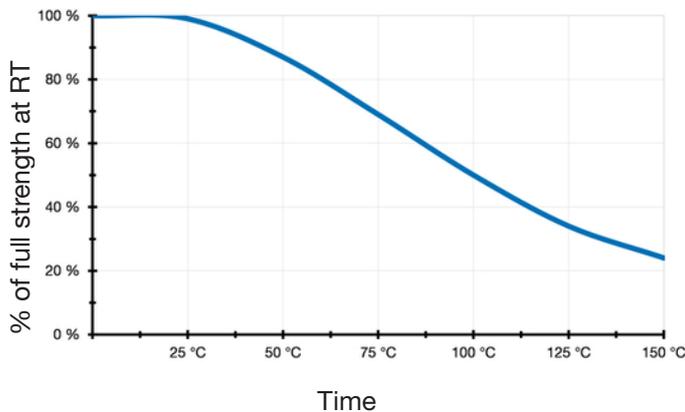

Instructions for use

When using WEICON products, the physical, safety-related, toxicological and ecological data and regulations in our EC safety data sheets (www.weicon.com) must be observed.

Strength in heat

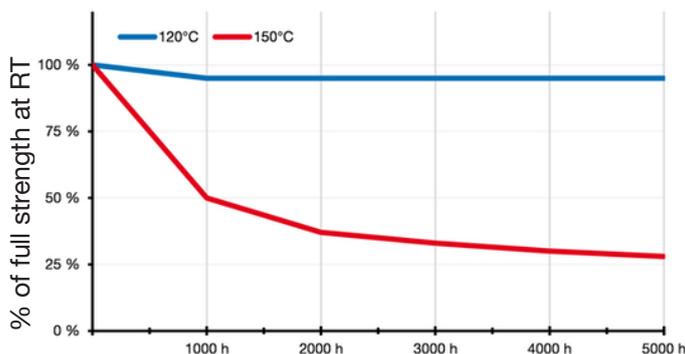

Accessories

- 10021433 Activator F, 200 ml, green
- 10001256 Dosing Tip L Size 1, 1 PCE

To the product detail page:



Note
The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.