

Easy-Mix PU-240 Polyurethane Adhesive



High-strength | extremely fast-curing | highly viscous | pot life of 240 seconds

WEICON Easy-Mix PU-240 Structural Adhesive is a high-strength, extremely fast-curing, highly viscous adhesive, which can be sanded and painted over after approx. 30 minutes. It is weather-resistant, resistant to chemicals and temperature-resistant from -55 °C to +125 °C (-67 to +257 °F).

WEICON PU-240 can be used to bond numerous materials such as composite materials, plastics, polyurethane, epoxies, polyester, metals, wood and ceramics to themselves and to each other with high tensile, shear and peel strength.

WEICON PU-240 can be used in plastic technology, machine construction, model and mould making, metal construction, ship and boat building, carriage and vehicle construction, trade show and exhibition construction and in many other applications.

Characteristics

Base	polyurethane	
Colour	black	
Minimum shelf life	at room temperature	18 mon.

Processing

Mixing ratio by weight	1:1	
Density of the mixture	1,30-1,35 g/cm ³	
Gap bridging up to max.	0,1 - 4 mm	

Curing

Pot life	at 20 °C	240 sec.
Handling strength	(35 % strength)	10 min.
Working strength after	(50 % strength)	30 min.
Final strength	(100 % strength)	12 h

Mechanical properties after curing

Tensile strength	DIN EN ISO 527-2	20 N/mm ²
Elongation at break (tensile)	DIN EN ISO 527-2	31 %
E-modulus (tensile)	DIN EN ISO 527-2	450-550 N/mm ²
Hardness (Shore D)		68
Lap shear strength material thicken. 1,5mm DIN EN 1465		
Steel 1.0338 sandblasted		23 N/mm ²
Stainless steel V2A sandblasted		18 N/mm ²
Aluminium sandblasted		14 N/mm ²

Thermal parameters

Temperature resistance	-55°C to +125°C
TGA decomposition temperature (Onset-Temp.)	+336 °C
Heat deflection resistance	DIN EN ISO 75-2
	+65 °C

Electrical parameters

Dielectric strength	DIN EN 60243-1 (20°C)	>23 kV/mm
---------------------	-----------------------	-----------


Approvals / Guidelines

ISSA Code	81 29 87
IMPA Code	812986

Instructions for use

When using WEICON products, the physical, safety-related, toxicological and ecological data and regulations in our EC safety data sheets (www.weicon.com) must be observed.

Tensile strength after storage

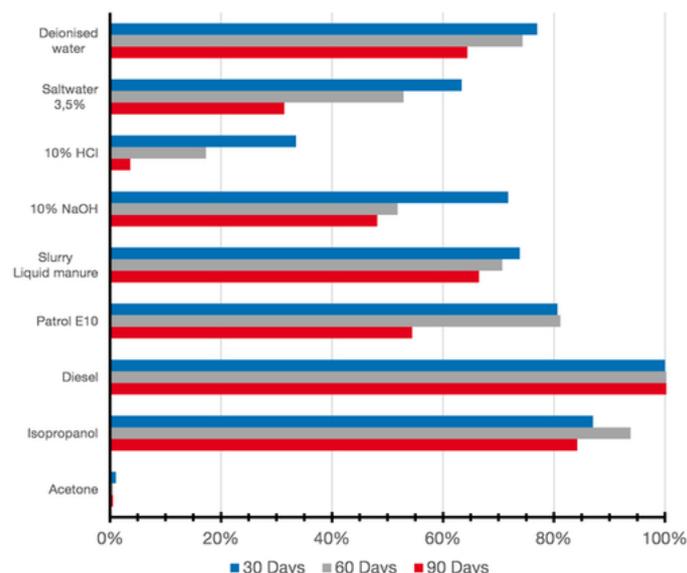

Surface Pre-Treatment

For a flawless adhesive bond, surfaces must be clean and dry (e.g. clean and degrease with Surface Cleaner). Higher strengths can be achieved by further pre-treatment of the surfaces, such as roughening by blasting or grinding. Some low-energy plastics, especially PTFE and polyolefins etc., can only be bonded after special pre-treatment of the surfaces by e.g. fluorination, low-pressure plasma, corona, flame treatment, or similar.

Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICON Middle East L.L.C.
United Arab Emirates
phone +971 4 880 25 05
info@weicon.ae

WEICON Czech Republic s.r.o.
Czech Republic
phone +42 (0) 417 533 013
info@weicon.cz

WEICON GmbH & Co. KG
(Headquarters) Germany
phone +49 (0) 251 9322 0
info@weicon.de

WEICON Romania SRL
Romania
phone +40 (0) 3 65 730 763
office@weicon.com

WEICON South East Asia Pte Ltd
Singapore
Phone (+65) 6710 7671
info@weicon.com.sg

WEICON Inc.
Canada
phone +1 877 620 8889
info@weicon.ca

WEICON Ibérica S.L.
Spain
phone +34 (0) 914 7997 34
info@weicon.es

WEICON Italia S.r.l.
Italy
phone +39 (0) 010 2924 871
info@weicon.it

WEICON SA (Pty) Ltd
South Africa
phone +27 (0) 21 709 0088
info@weicon.co.za

WEICON Kimya Sanayi Tic. Ltd. Şti.
Türkiye
phone +90 (0) 212 465 33 65
info@weicon.com.tr

Easy-Mix PU-240 Polyurethane Adhesive

Application

WEICON Easy-Mix products can be processed straight from the double cartridge by means of the included static mixer. Dismiss the first 5 cm of the adhesive bead. The adhesive is applied to just one side. The specified pot life refers to a material batch of 10 ml at room temperature. Larger batch quantities will result in faster curing. Higher temperatures also reduce the pot life and curing time. (General rule: every increase by +10 °C above room temperature results in a decrease of the pot life and curing time by half). Temperatures below +16 °C increase the pot life and curing time significantly. From approx. +5 °C and below, no reaction takes place.

Storage

Store in the unopened original container at a relative humidity of <70% and at a constant room temperature in a dry place. Avoid sources of heat and both direct and indirect sunlight. Once opened, the shelf life is reduced.

Scope of delivery

Adhesive | Quadro Mixing Nozzle A | Gloves

Accessories

- 10005236 Quadro Mixing Nozzle A, 1 PCE, blue
- 10005237 Dispenser Easy-Mix D 50, 1 PCE
- 10010887 Processing Spatula short, 1 PCE
- 10068261 Dosing Tip A Size 0,5 mm, 1 PCE
- 10101999 WEICON Manual Dispenser, 1 x 1:1 | 2:1

Conversion table

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$	$\text{Nm} \times 8.851 = \text{lb}\cdot\text{in}$
$\text{mm}/25.4 = \text{inch}$	$\text{Nm} \times 0.738 = \text{lb}\cdot\text{ft}$
$\mu\text{m}/25.4 = \text{mil}$	$\text{Nm} \times 141.62 = \text{oz}\cdot\text{in}$
$\text{N} \times 0.225 = \text{lb}$	$\text{mPa}\cdot\text{s} = \text{cP}$
$\text{N}/\text{mm}^2 \times 145 = \text{psi}$	$\text{N}/\text{cm} \times 0.571 = \text{lb}/\text{in}$
$\text{MPa} \times 145 = \text{psi}$	$\text{kV}/\text{mm} \times 25.4 = \text{V}/\text{mil}$

Available sizes

- 10031974 Easy-Mix PU-240 Polyurethane Adhesive, 50 ml, black

To the product detail page:



Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICON Middle East L.L.C.
United Arab Emirates
phone +971 4 880 25 05
info@weicon.ae

WEICON Czech Republic s.r.o.
Czech Republic
phone +42 (0) 417 533 013
info@weicon.cz

WEICON GmbH & Co. KG
(Headquarters) Germany
phone +49 (0) 251 9322 0
info@weicon.de

WEICON Romania SRL
Romania
phone +40 (0) 3 65 730 763
office@weicon.com

WEICON South East Asia Pte Ltd
Singapore
Phone (+65) 6710 7671
info@weicon.com.sg

WEICON Inc.
Canada
phone +1 877 620 8889
info@weicon.ca

WEICON Ibérica S.L.
Spain
phone +34 (0) 914 7997 34
info@weicon.es

WEICON Italia S.r.l.
Italy
phone +39 (0) 010 2924 871
info@weicon.it

WEICON SA (Pty) Ltd
South Africa
phone +27 (0) 21 709 0088
info@weicon.co.za

WEICON Kimya Sanayi Tic. Ltd. Şti.
Türkiye
phone +90 (0) 212 465 33 65
info@weicon.com.tr