

# Easy-Mix RK-7300 Structural Acrylic Adhesive



**Excellent adhesion to plastics and EPDM | high strength | highly viscous | impact-resistant**

WEICON Easy-Mix RK-7300 is a fast-curing, solvent-free structural and construction adhesive based on MMA (methyl methacrylate). It adheres perfectly to a variety of materials and has a high adhesive strength. It can be applied universally for static and dynamic loads. High-strength bondings are also possible in case of low surface energy plastics, such as PE or PP. Its high-viscosity characteristics also permit material pairings with different expansion coefficients, such as plastic / aluminium or steel. Special fillers (glass beads) ensure a consistent adhesive gap of 0.25 mm. Maximum gap-bridging: 1 mm.

## Characteristics

Base	methyl methacrylate	
Texture	pasty	
Colour	translucent / hazy white	
Minimum shelf life	at room temperature	6 mon.

## Processing

Processing procedure	Easy-Mix	
Processing temperature	+10°C to +40°C	
Curing temperature	> +16 °C	
Mixing ratio by weight	1:1	
Viscosity of the mixture	170.000-200.000 mPa·s	
Density of the mixture	1,00 g/cm³	
Gap bridging up to max.	1 mm	

## Curing

Pot life	at 20 °C	8 min.
Handling strength	(35 % strength)	60 min.
Working strength after	(50 % strength)	480 min.
Final strength	(100 % strength)	24 h

## Mechanical properties after curing

Lap shear strength material thickn. 1,5mm DIN EN 1465	
Steel 1.0338 sandblasted	5 N/mm <sup>2</sup>
Stainless steel V2A sandblasted	4 N/mm <sup>2</sup>
Aluminium sandblasted	5 N/mm <sup>2</sup>
PVC-rigid roughened	11 N/mm <sup>2</sup>
CFRP	7 N/mm <sup>2</sup>
ABS	8 N/mm <sup>2</sup>
PC (polycarbonate)	6 N/mm <sup>2</sup>
GFRP	7 N/mm <sup>2</sup>
PMMA	6 N/mm <sup>2</sup>
Polyamide 6.6	3 N/mm <sup>2</sup>
POM (polyoxymethylene)	5 N/mm <sup>2</sup>
PE-HD	5 N/mm <sup>2</sup>
PP (polypropylene)	6 N/mm <sup>2</sup>
PTFE (polytetrafluorethylene)	2 N/mm <sup>2</sup>
EPDM (Shore A70)	1 N/mm <sup>2</sup>

## Thermal parameters

Temperature resistance	-55°C to +100°C	
Tg after curing at room temperature (DSC)	51,5 °C	
Temperature conductivity	0,118 mm <sup>2</sup> /s	
Thermal conductivity	DIN EN ISO 22007-4	0,15 W/m·K
Heat capacity	DIN EN ISO 22007-4	1,489 J/(g·K)

## Electrical parameters

Resistance	DIN EN 62631-3-1	1,25 · 10 <sup>13</sup> Ω·m
------------	------------------	-----------------------------


## Approvals / Guidelines

ISSA Code	75.509.37	
-----------	-----------	--

## Instructions for use

When using WEICON products, the physical, safety-related, toxicological and ecological data and regulations in our EC safety data sheets ([www.weicon.com](http://www.weicon.com)) must be observed.

## Tensile strength after storage

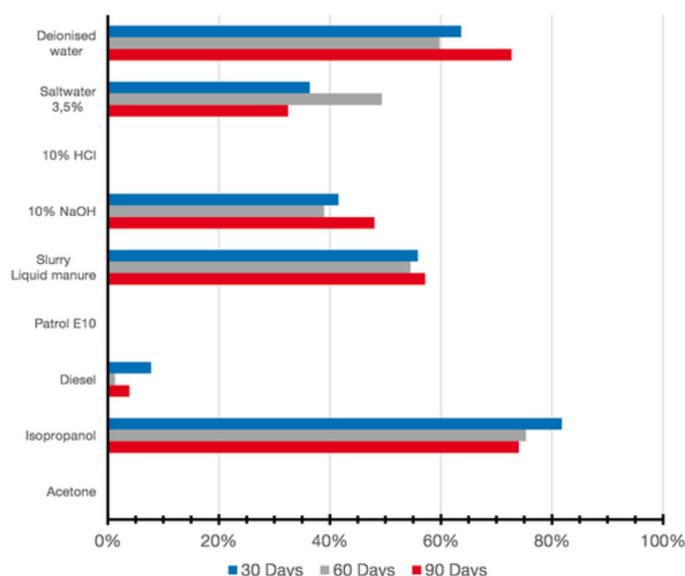

## Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICON Middle East L.L.C.  
United Arab Emirates  
phone +971 4 880 25 05  
info@weicon.ae

WEICON Czech Republic s.r.o.  
Czech Republic  
phone +42 (0) 417 533 013  
info@weicon.cz

WEICON GmbH & Co. KG  
(Headquarters) Germany  
phone +49 (0) 251 9322 0  
info@weicon.de

WEICON Romania SRL  
Romania  
phone +40 (0) 3 65 730 763  
office@weicon.com

WEICON South East Asia Pte Ltd  
Singapore  
Phone (+65) 6710 7671  
info@weicon.com.sg

WEICON Inc.  
Canada  
phone +1 877 620 8889  
info@weicon.ca

WEICON Ibérica S.L.  
Spain  
phone +34 (0) 914 7997 34  
info@weicon.es

WEICON Italia S.r.l.  
Italy  
phone +39 (0) 10 2924 871  
info@weicon.it

WEICON SA (Pty) Ltd  
South Africa  
phone +27 (0) 21 709 0088  
info@weicon.co.za

WEICON Kimya Sanayi Tic. Ltd. Şti.  
Türkiye  
phone +90 (0) 212 465 33 65  
info@weicon.com.tr

# Easy-Mix RK-7300 Structural Acrylic Adhesive

## Surface Pre-Treatment

Clean and dry bonding surfaces are essential for flawless adhesive bonding (e.g. cleaning and degreasing with WEICON Surface Cleaner). Smooth surfaces can be roughened mechanically.

## Application

WEICON Easy-Mix products can be processed straight from the double cartridge by means of the included static mixer. Dismiss the first 5 cm of the adhesive bead. The adhesive is applied to just one side. The specified pot life refers to a material batch of 10 ml at room temperature. Larger batch quantities will result in faster curing. Higher temperatures also reduce the pot life and curing time. (General rule: every increase by +10 °C above room temperature results in a decrease of the pot life and curing time by

half). Temperatures below +16 °C increase the pot life and curing time significantly. From approx. +5C and below, no reaction takes place.

## Storage

WEICON structural acrylic adhesives should be stored in a dry place at a constant room temperature. Unopened containers can be stored at temperatures from +18 °C to +25 °C. Protect from direct sunlight. Storage in a refrigerated environment increases the shelf life.

## Scope of delivery

Adhesive | Quadro Mixing Nozzle B

## Accessories

- 10029793 Quadro Mixing Nozzle B, 1 PCE, grey
- 10005237 Dispenser Easy-Mix D 50, 1 PCE
- 10000913 Glass Fibre Cloth Tape, 1 PCE, white
- 10068261 Dosing Tip A Size 0,5 mm, 1 PCE
- 10101999 WEICON Manual Dispenser, 1 x 1:1 | 2:1

## Conversion table

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$	$\text{Nm} \times 8.851 = \text{lb}\cdot\text{in}$
$\text{mm}/25.4 = \text{inch}$	$\text{Nm} \times 0.738 = \text{lb}\cdot\text{ft}$
$\mu\text{m}/25.4 = \text{mil}$	$\text{Nm} \times 141.62 = \text{oz}\cdot\text{in}$
$\text{N} \times 0.225 = \text{lb}$	$\text{mPa}\cdot\text{s} = \text{cP}$
$\text{N}/\text{mm}^2 \times 145 = \text{psi}$	$\text{N}/\text{cm} \times 0.571 = \text{lb}/\text{in}$
$\text{MPa} \times 145 = \text{psi}$	$\text{kV}/\text{mm} \times 25.4 = \text{V}/\text{mil}$

## Available sizes

- 10047457 Easy-Mix RK-7300 Structural Acrylic Adhesive, 50 ml, translucent / hazy white

To the product detail page:



### Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICON Middle East L.L.C.  
United Arab Emirates  
phone +971 4 880 25 05  
info@weicon.ae

WEICON Czech Republic s.r.o.  
Czech Republic  
phone +42 (0) 417 533 013  
info@weicon.cz

WEICON GmbH & Co. KG  
(Headquarters) Germany  
phone +49 (0) 251 9322 0  
info@weicon.de

WEICON Romania SRL  
Romania  
phone +40 (0) 3 65 730 763  
office@weicon.com

WEICON South East Asia Pte Ltd  
Singapore  
Phone (+65) 6710 7671  
info@weicon.com.sg

WEICON Inc.  
Canada  
phone +1 877 620 8889  
info@weicon.ca

WEICON Ibérica S.L.  
Spain  
phone +34 (0) 914 7997 34  
info@weicon.es

WEICON Italia S.r.l.  
Italy  
phone +39 (0) 010 2924 871  
info@weicon.it

WEICON SA (Pty) Ltd  
South Africa  
phone +27 (0) 21 709 0088  
info@weicon.co.za

WEICON Kimya Sanayi Tic. Ltd. Şti.  
Türkiye  
phone +90 (0) 212 465 33 65  
info@weicon.com.tr