



WEICON

APPLICATIONS AND PRODUCTS I



www.weicon.com

V 1.24

Content	Products used	Page
Restoring a tool machine bed	WEICON WR	4
Repair of the fan housing of a ventilator	WEICON A • Rust Protection 2000 PLUS • WEICON Ceramic BL Cleaner Spray S	5
Bonding a logo to a sign	Mounting Tape • Primer K 200 • Flex 310 M® Super-Tack Surface Cleaner	6
Repair of a drive shaft	WEICON HB 300	7
Coating a pump housing	WEICON GL • WEICON Ceramic BL • Cleaner Spray S	8
Production of axle boots	Urethane 45 • Cleaner Spray S	9
Creating a ceramic abrasion protection in pipe connections	WEICON WAL 04 • Cleaner Spray S	10
Repair of conveyor belts in a quartz mine	Belt Repair-Kit 550 • Belt Repair-Kit 590 • Dispenser 2K 10:1 Cleaner Spray S	11
Bonding a wheel and gearwheel in a gravel plant	AN 306-38 • Surface Cleaner	12
Repair of stirring units in a gold mine	WEICON WP • Cleaner Spray S	13
Repair of the end cover of a seawater filter on a yacht	Urethane 80 • Cleaner Spray S	14
Lining a machine/robot foot	WEICON CBC • Flex 310 M® Classic	15
Bonding polyethylene strips to aluminium rails	Contact Primer for polyolefine • VA 30 Black	16
Bonding the inner thread of a pneumatic hammer	AN 305-77 • Surface Cleaner	17
Levelling PUR wear protection plates in mill construction	Primer G • Urethane 85 • Dispenser 2K 10:1 • Cleaner Spray S	18
Mounting stoneware sewers with plastic pipes	Flex 310 M® 2 K	19
Repair of a pump impeller	WEICON ST • WEICON Ceramic BL • Cleaner Spray S	20
Repairing the foundation of a conveyor system in a copper mine	WEICON CBC	21
Bonding the cooler of an electric race car	Primer E 500 • Black-Seal Special Silicone • Surface Cleaner	22
Repair of a polyethylene tank used in agriculture	Easy-Mix PE-PP 45 • Dispenser PE-PP Mixing Nozzle PE-PP • Special Piston • Surface Cleaner	23
Repair and restoration of pumps in a tomato factory	WEICON WR2 • WEICON Ceramic BL • Cleaner Spray S	24
Restoring a corroded flange surface	Mould Release Agent Wax P 500 • WEICON HB 300	25
Repair of a shell and tube cooler	WEICON HB 300 • WEICON Ceramic BL • Cleaner Spray S	26
Inner coating of pumps	WEICON HB 300 • WEICON Ceramic BL • Cleaner Spray S	27
Reproduction of a damaged damper foot	Mould Release Agent Liquid F 1000 • Urethane 60	28
Repair of a tank lid	WEICON A • Cleaner Spray S	29
Repair of the adapter sleeve of a shock absorber	Easy-Mix HT 180 • Cleaner Spray S	30
Bonding illuminated signs	Primer K 200 • Flex 310 M® Classic • Flex 310 M® HT 200 Surface Cleaner	31
Sealing and attaching sockets in feed containers made of polyethylene	Easy-Mix PE-PP 50 • Dispenser D50 Quadro Mixing Nozzle • Surface Cleaner	32
Restoration of the rubber protective coating of a hydraulic line	Primer G • Urethane 85 • Cleaner Spray S	33
Bonding of salt stones in a dry-aging cooling chamber	Flex 310 M® Classic • Surface Cleaner	34
Restoration of the edge mill of a pellet press	WEICON WR2 • WEICON Ceramic BL • Cleaner Spray S	35
Repair of a roller fender on a quay wall	Primer G • Urethane 85	36
Repair of a catamaran	WEICON HP • WEICON Ceramic BL	37
Bonding ID chips to chip nest on waste bins	Easy-Mix PE-PP 45 • Dispenser PE-PP • Mixing Nozzles PE-PP Special Piston • Surface Cleaner	38
Bonding stainless steel sheets to aluminium	Flex 310 M® Classic • Cleaner Spray S	39
Gap compensation on a press plate in a quarry	WEICON HB 300 • Cleaner S	40
Levelling an access ramp on a drive-through platform scale	Belt Repair-Kit 590	41
Bonding and coating a chair suspension	Easy-Mix RK-7100 • Surface Cleaner	42
Sealing a leak in a petroleum line	Pipe Repair-Kit • Cleaner S	43
Bonding a door locking system in a bus	Easy-Mix PE-PP 45 • Dispenser PE-PP • Mixing Nozzles PE-PP Special Piston • Cleaner Spray S	44
Production of truck axles	AN 302-71 • Black-Seal Special Silicone Flex 310 M® 2 K • Cleaner Spray S	45
Bonding roller cones	AN 306-30 • Surface Cleaner	46
Repair of oil pipelines	WEICON HB 300 • Cleaner Spray S	47
Repair of the piping of a limestone filter system	WEICON WP • WEICON Pipe Repair-Kit	48
Mill lining	WEICON WAL 04 • WEICON WAL 06	49
Bearing repair on a crane runway	Injection Packer Set • WEICON CBC	50

ALWAYS THE RIGHT SOLUTION

We don't just sell products, we offer solutions – worldwide. No matter where, we find the right answers to our customers' application requests.

Whether protective coatings on pump housings, pipe connections and hydraulic lines, repairs of conveyor belts, drive shafts and evaporators, or bonding of salt stones, stainless steel plates or roller journals – the WEICON product range is versatile and suitable for every application.

Restoring a tool machine bed



Description:

- ▶ removal of the initial cast coating by heating to above 200 °C
- ▶ application of a new coating by casting the epoxy resin system WEICON WR
- ▶ important: slight overfilling of the space to be filled
- ▶ after curing mechanical processing of the surface by milling and inserting cooling ducts



WEICON WR

- ▶ 0,2 kg 10054400
- ▶ 0,5 kg 10000077
- ▶ 2,0 kg 10000078



Advantage of our solution:

- ▶ no replacement of the tool machine necessary thanks to cost-effective repair

VIDEO



Repair of the fan housing of a ventilator



Description:

- ▶ pre-treatment with sandblasting (SA 2½)
- ▶ replacing the missing material surface by inserting a stainless steel sheet
- ▶ cleaning the entire surfaces to be coated with WEICON Cleaner Spray S
- ▶ sanding the stainless steel sheet to improve surface roughness
- ▶ application of WEICON A to build up basic coating on the inside and outside
- ▶ after curing: smoothing and sanding the excess material
- ▶ WEICON Cleaner Spray S
- ▶ application of WEICON Ceramic BL as finish
- ▶ for visual upgrading and as corrosion protection application of WEICON Rust Protection 2000 Plus



Cleaner Spray S

▶ 500 ml
10000147



WEICON A

▶ 0,2 kg 10054381 ▶ 0,5 kg 10000003 ▶ 2,0 kg 10000006



Rust Protection 2000 PLUS

▶ 400 ml
10021354
silver grey



WEICON Ceramic BL

▶ 0,2 kg 10054394 ▶ 0,5 kg 10000093 ▶ 2,0 kg 10005233

Advantage of our solution:

- ▶ cost-effective repair and avoiding a replacement with long delivery times

Bonding a logo to a sign



Description:

- ▶ cleaning both bonding surfaces with WEICON Surface Cleaner
- ▶ application of WEICON Primer K 200 to the plastic surface of the sign
- ▶ application of WEICON Mounting Tape as spacer for the bonding gap and to support the initial adhesive strength
- ▶ application of WEICON Flex 310 M® Super-Tack
- ▶ joining the parts



Surface Cleaner

- ▶ 150 ml 10024317
- ▶ 400 ml 10024313



Mounting Tape

10050551
grey



Primer K 200

- ▶ 250 ml 10023567



**Flex 310 M®
Super-Tack**

- ▶ 290 ml 10023929
grey



Advantage of our solution:

- ▶ fast, cost-effective adhesive bond in line with the design
- ▶ alternative to screws, no visible joints



Repair of a drive shaft



Description:

- ▶ reducing the drive shaft to an undersize of > 3 mm
- ▶ creating a barrier (tape) to remove access material in uncured state
- ▶ circumferential application of WEICON HB 300 in a layer thickness of approx. > 5 mm
- ▶ after curing (24 h), the repaired area is reduced to the desired size



WEICON HB 300


- ▶ 0,2 kg 10004472
- ▶ 0,5 kg 10001084
- ▶ 1,0 kg 10000099

VIDEO




Advantage of our solution:

- ▶ fast and cost-effective repair
- ▶ avoiding long delivery times
- ▶ fast recommissioning of the system
- ▶ cost savings of approx. 8,000 EUR compared to a replacement

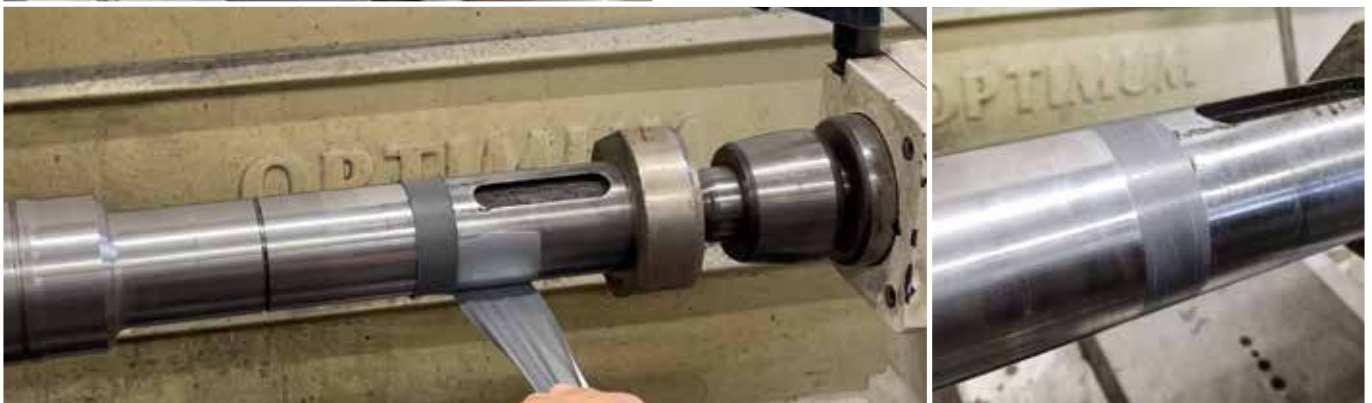

Coating a pump housing

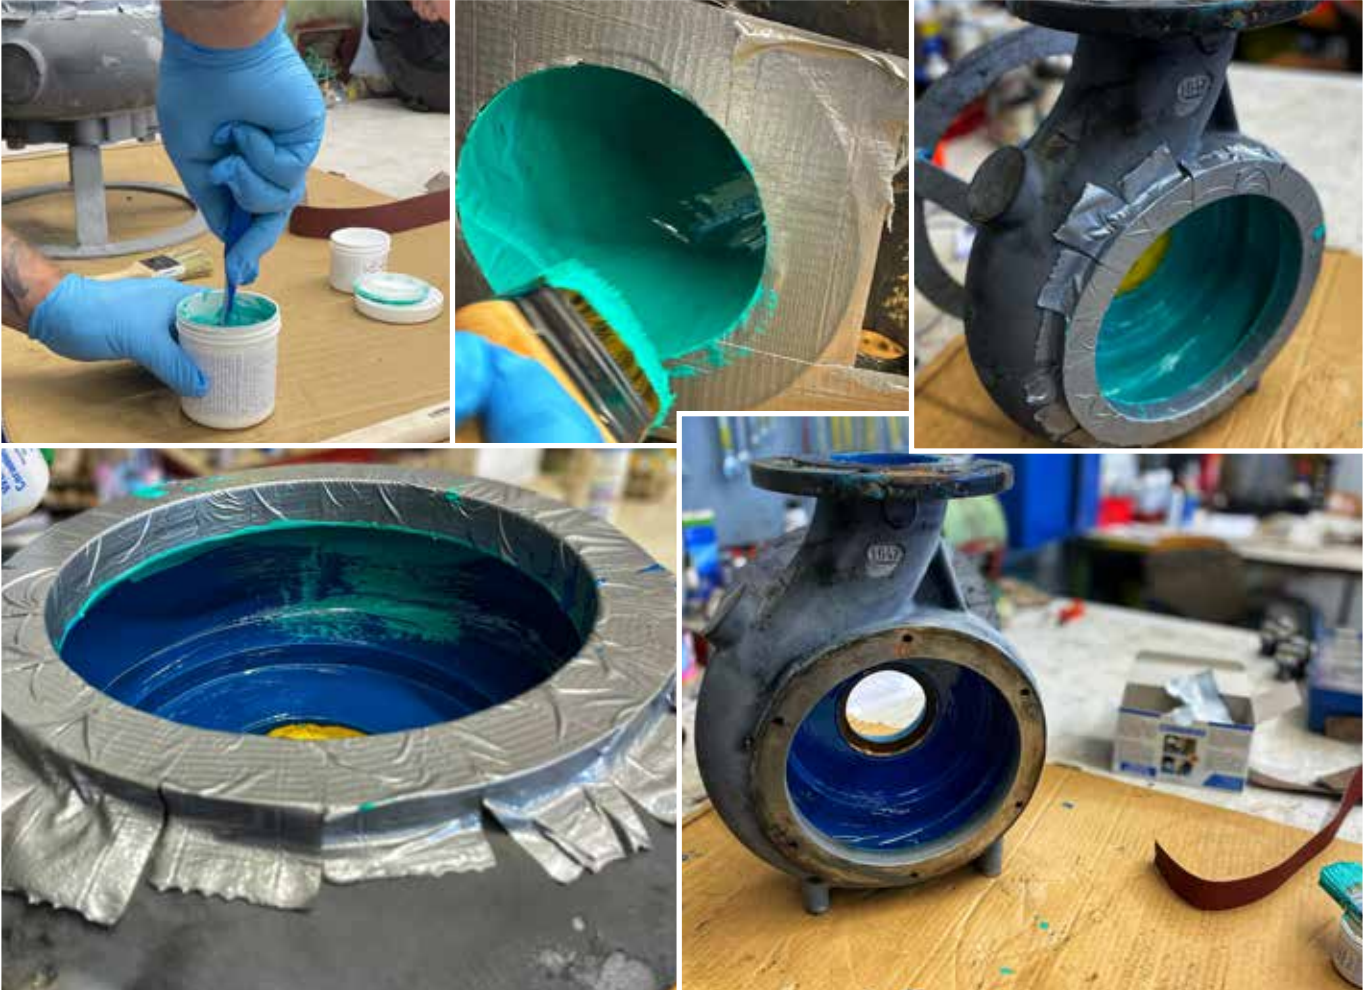

Description:

- ▶ cleaning with WEICON Cleaner Spray S
- ▶ first application with WEICON GL as base coat and control layer
- ▶ second application with WEICON Ceramic BL as wear protection



Advantage of our solution:

- ▶ better adhesion of the wear protection layer WEICON Ceramic BL due to filling the pinholes with WEICON GL
- ▶ cost-effective repair
- ▶ no replacement of the component necessary

Production of axle boots



Description:

- ▶ cleaning the mould with WEICON Cleaner Spray S
- ▶ pre-treatment with WEICON Mold Release Agent
- ▶ casting the axle boots with WEICON Urethane 45

Cleaner Spray S

- ▶ 500 ml
- ▶ 10000147



Urethane 45

Shore hardness: A 45

- ▶ 500 g
- ▶ 10022361

VIDEO



Advantage of our solution:

- ▶ cost-effective reproduction of various geometric shapes



Creating a ceramic abrasion protection in pipe connections



Description:

- ▶ cleaning with Cleaner Spray S
- ▶ sandblasting (SA 2 ½)
- ▶ repeated cleaning with Cleaner Spray S
- ▶ inserting/bonding of the ceramics with the epoxy resing system WEICON WAL 04



WEICON WAL 04

▶ 2,0 kg
10020990

Cleaner Spray S

▶ 500 ml
10000147



Advantage of our solution:

- ▶ strong adhesion between WAL 04 and the steel component
- ▶ restoration of the abrasion protection

Repair of conveyor belts in a quartz mine



Description:

- ▶ removing coarse dirt
- ▶ roughening and levelling the damaged areas with an angle grinder (rasp disc or cup wheel)
- ▶ cleaning the surface with WEICON Cleaner Spray S
- ▶ mixing and applying WEICON Primer G with a paint brush
- ▶ allow WEICON Primer G sufficient time to flash off
- ▶ depending on the container application of WEICON Urethane 85
- ▶ smoothing the surface with WEICON Contour Spatula Flexy

Cleaner Spray S

- ▶ 500 ml
10000147



Belt Repair-Kit 550

- ▶ 500 g + Primer G 50 g
10055014



Belt Repair-Kit 590

- ▶ 540 g + Primer G 50 g
10052425

Dispenser 2C 10:1

Recommended for the 2-component 540g cartridge

10057514

VIDEO



Advantage of our solution:

- ▶ very cost-effective way to restore the functioning of the conveyor belts and thus extension of the service life
- ▶ versatile application possibilities

Bonding a wheel and gearwheel in a gravel plant



Description:

- ▶ cleaning with WEICON Surface Cleaner
- ▶ high-alloy and hardened steels are bonded with WEICONLOCK AN 306-38 Retaining Cylindrical Assemblies, applied in a circumferential and full-surface bead



Surface Cleaner

- ▶ 150 ml 10024317
- ▶ 400 ml 10024313



AN 306-38

- ▶ 10 ml 10030478
- ▶ 20 ml 10016443
- ▶ 50 ml 10017888
- ▶ 200 ml 10020027



Advantage of our solution:

- ▶ high frictional connection with high radial and axial forces



Repair of stirring units in a gold mine



Description:

- ▶ abrasion on stirring units/propellers caused by sand and stones
- ▶ sandblasting (SA 21/2) and cleaning with Cleaner Spray S
- ▶ reconditioning of the propeller blades by coating with WEICON WP
- ▶ 16 kilograms were used



Cleaner Spray S

- ▶ 500 ml
- ▶ 10000147



WEICON WP


- ▶ 0,2 kg
- ▶ 2,0 kg
- ▶ 10,0 kg
- ▶ 10054399
- ▶ 10032320
- ▶ 10032939

Advantage of our solution:



- ▶ restoring the efficiency of the stirring units
- ▶ durable abrasion protection for longer service life

Repair of the end cover of a seawater filter on a yacht

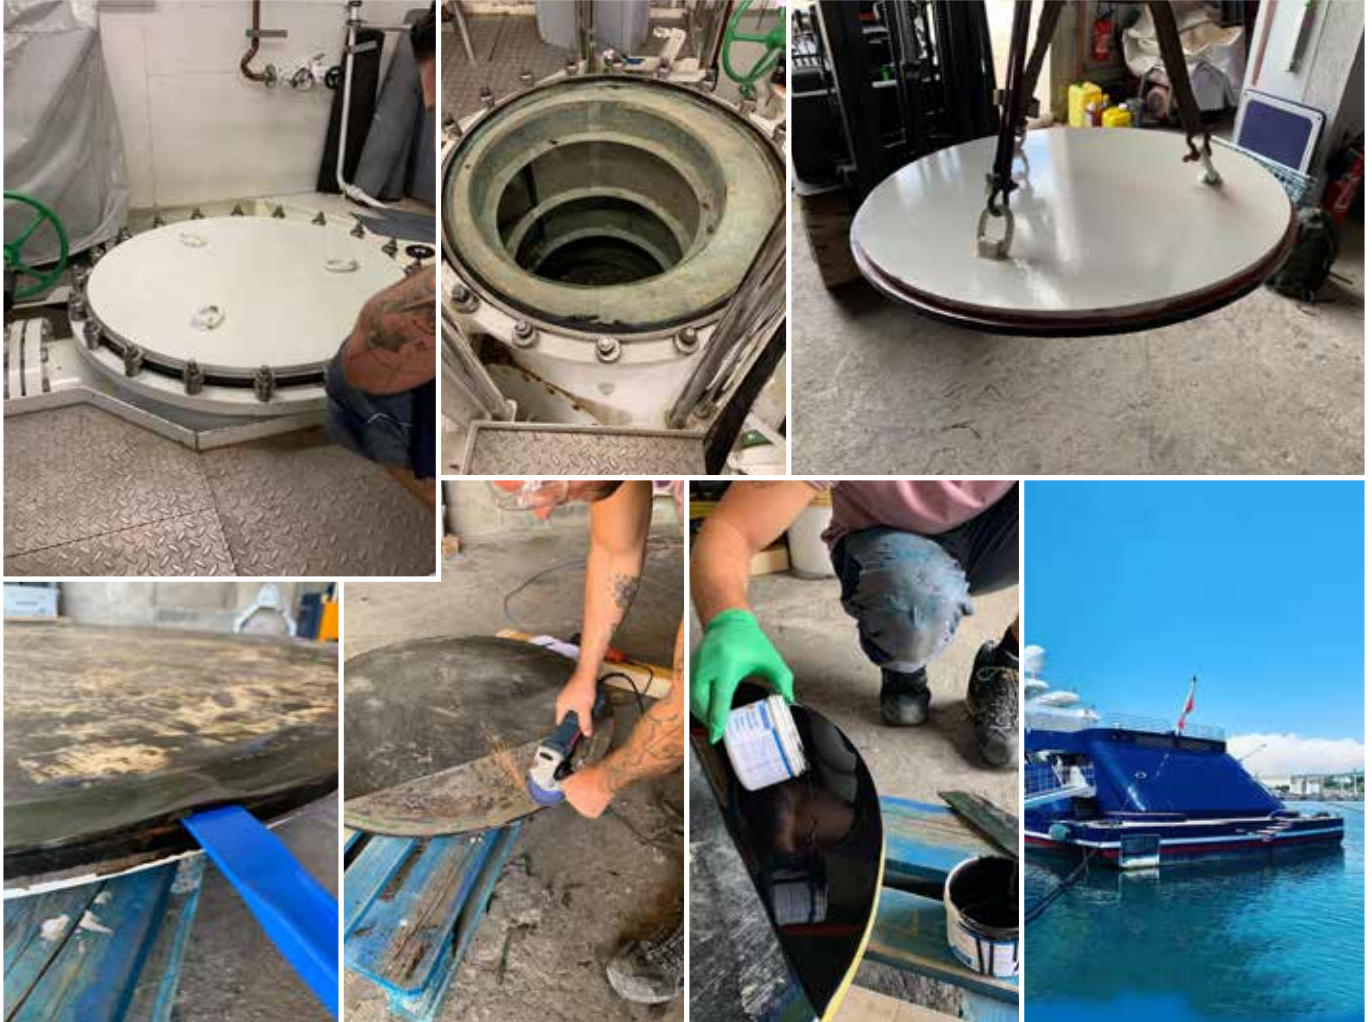

Description:

- ▶ repairing damages on the end covers, which had been caused by mounting errors
- ▶ cutting out and removing the damaged area
- ▶ additional roughening and sanding of material residues with an angle grinder
- ▶ enclosing the damaged area with a common tape
- ▶ cleaning the sanded surface with WEICON Cleaner Spray S
- ▶ even casting of the WEICON Urethane 80



Cleaner Spray S

▶ 500 ml
10000147

Advantage of our solution:

- ▶ fast on-site repair during ongoing use of the yacht
- ▶ high layer build-up and wear protection thanks to the self-levelling WEICON Urethane 80




Urethane 80

Shore hardness: A 80

▶ 500 g
10012368

Lining a machine/robot foot

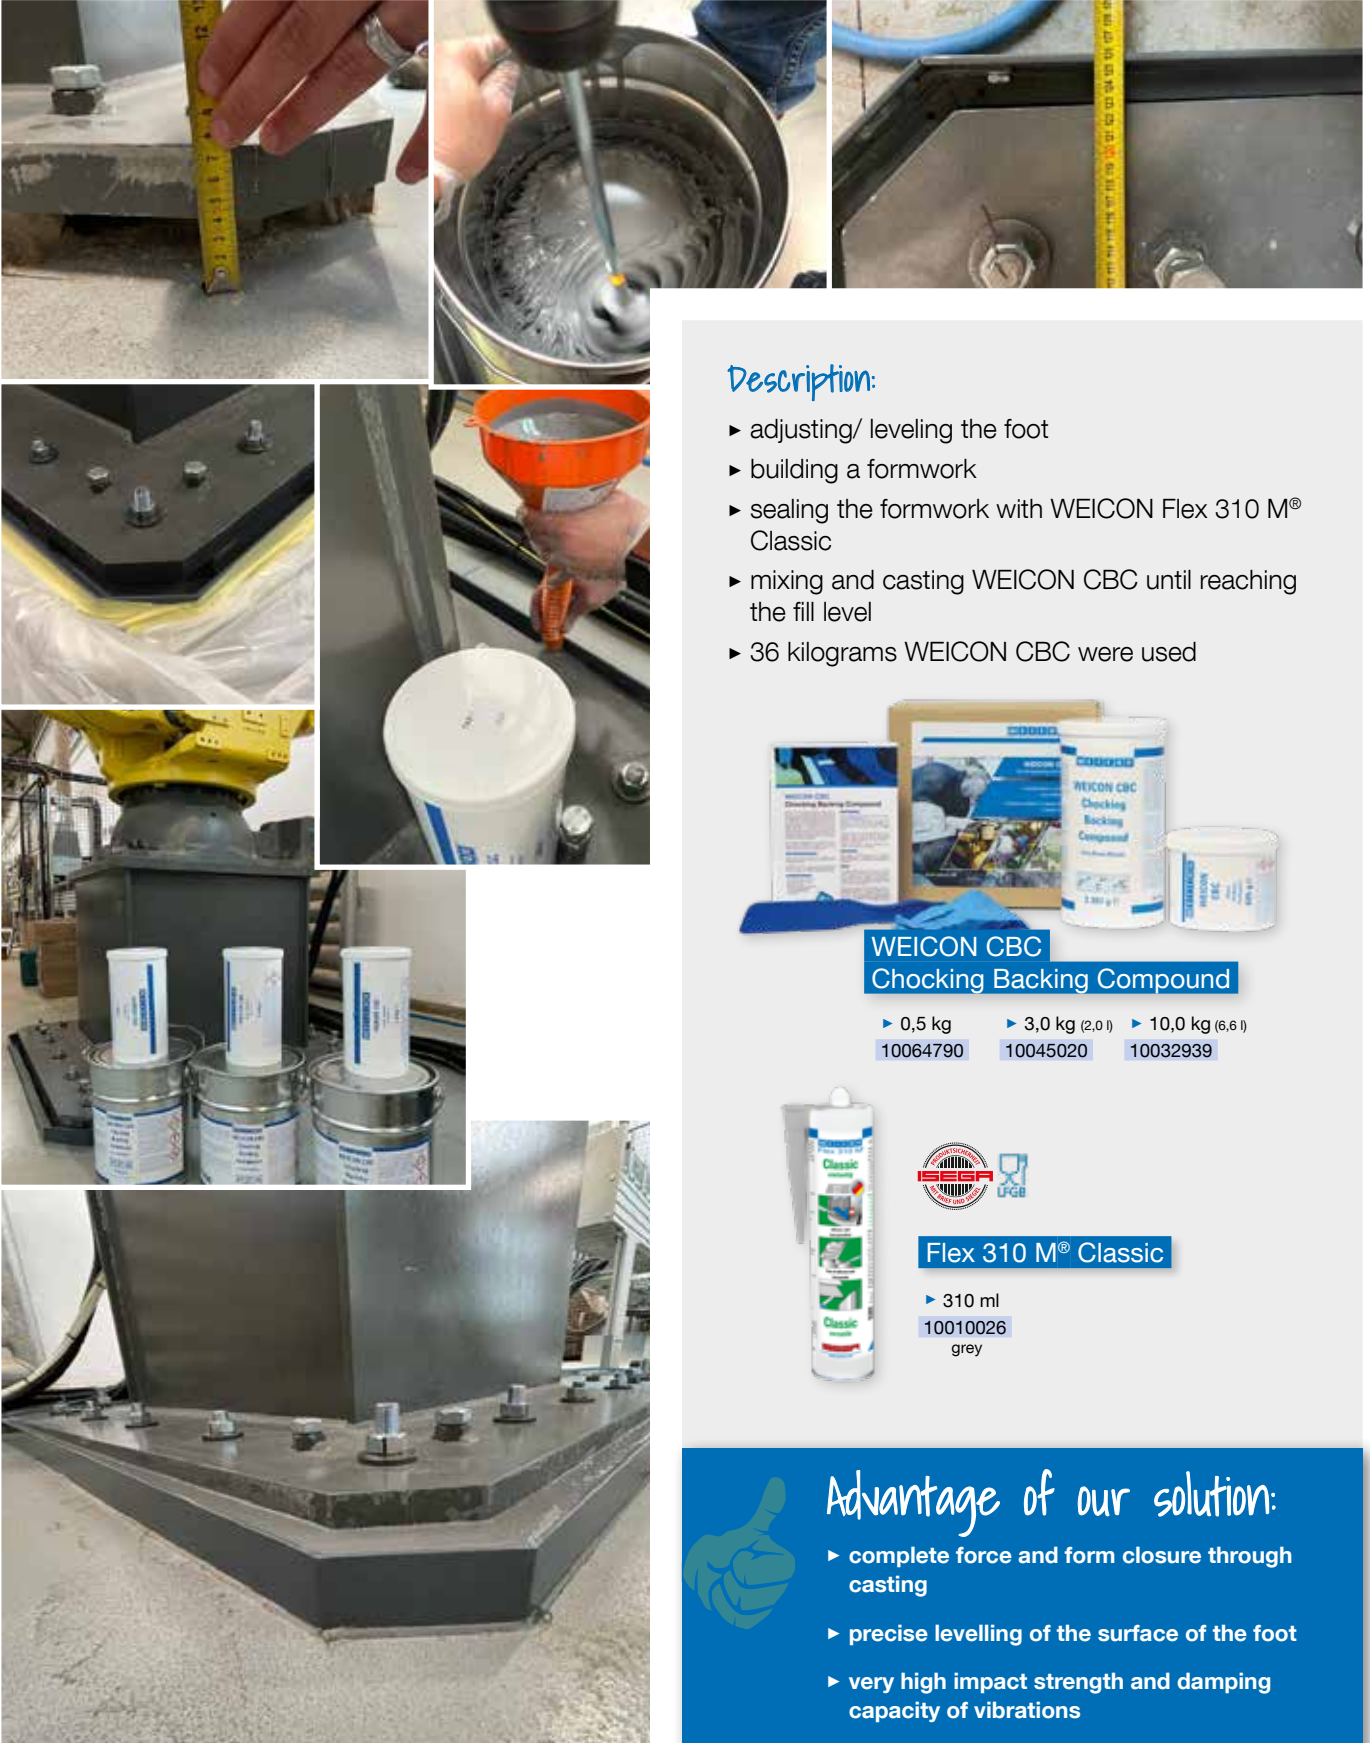

Description:

- ▶ adjusting/ leveling the foot
- ▶ building a formwork
- ▶ sealing the formwork with WEICON Flex 310 M® Classic
- ▶ mixing and casting WEICON CBC until reaching the fill level
- ▶ 36 kilograms WEICON CBC were used



WEICON CBC Chocking Backing Compound

- ▶ 0,5 kg
10064790
- ▶ 3,0 kg (2,0 l)
10045020
- ▶ 10,0 kg (6,6 l)
10032939



Flex 310 M® Classic

- ▶ 310 ml
10010026
grey

Advantage of our solution:

- ▶ complete force and form closure through casting
- ▶ precise levelling of the surface of the foot
- ▶ very high impact strength and damping capacity of vibrations

Bonding polyethylene strips to aluminium rails



Description:

- ▶ polyethylene strips are bonded to aluminium rails
- ▶ the PE layer serves as a sliding guide for plastic strips (strapping technology)
- ▶ due to the small bonding gap and the material properties of the polyethylene, WEICON CA-Primer was used in combination with WEICON Contact VA 30 Black



**Contact Primer
for polyolefins**

▶ 10 ml
10000275



VA 30 Black

▶ 12 g 10025827 ▶ 30 g 10025824 ▶ 60 g 10025829 ▶ 500 g 10025987



Advantage of our solution:

- ▶ high-strength bond despite low surface energy plastic

Bonding the inner thread of a pneumatic hammer



Description:

- ▶ cleaning the thread surfaces on the inside and outside with WEICON Surface Cleaner
- ▶ application of WEICONLOCK AN 305-77 Thread Sealing
- ▶ assembly of both components



Surface Cleaner

▶ 150 ml 10024317 ▶ 400 ml 10024313



AN 305-77

▶ 50 ml 10019949 ▶ 200 ml 10020011 ▶ 300 ml 10034148

Advantage of our solution:



- ▶ securely locked screw joints during use of the pneumatic hammer
- ▶ easy disassembly in case maintenance is required
- ▶ the hammer works under continuous load at 1,500 strokes per minute

Levelling PUR wear protection plates in mill construction



Description:

- ▶ providing the joint area of the wear protection plates with a V-cut
- ▶ cleaning with WEICON Brake Cleaner
- ▶ masking the areas left and right of the joint with tape to remove excess material
- ▶ application of WEICON Primer G (observe flash-off time!)
- ▶ application of WEICON Urethane 85 from double cartridge with mixing nozzle
- ▶ levelling with a spatula
- ▶ accessories: Dispenser 2C 10:1 490 ml



Urethane 85

Shore hardness: A 85

▶ 500 g
10057130
Work Package

▶ 540 g
10057188
Cartridge

Primer G

Special bonding agent for urethanes for the pre-treatment of rubber and metal surfaces

▶ 50 g
10057199

Cleaner Spray S

▶ 500 ml
10000147

Dispenser 2K 10:1

Recommended for the 2-component 540g cartridge

10057514

Advantage of our solution:

- ▶ easy application
- ▶ even transition on the joint area, thus less surface for wear to attack
- ▶ more efficient rotation in the mill



Mounting stoneware sewers with plastic pipes



Description:

- ▶ installation of a dosing system due to the large material consumption
- ▶ gap-filling and bonding with generous application of WEICON Flex 310 M® 2 K
- ▶ with this type of drum dosing system, the adhesive is mixed only in the mixing nozzle

Flex 310 M® 2 K

- ▶ 250 ml
- ▶ 10027733
grey
- ▶ special mixing nozzle
10027692



Advantage of our solution:

- ▶ compared to other adhesives: elasticity, tolerance compensation, good sealing effect, high adhesive strength and curing independent of ambient conditions thanks to 2C system
- ▶ adhesive is only mixed in the mixing nozzle

Repair of a pump impeller



Description:

- ▶ surface pre-treatment with sandblasting (SA 2 ½)
- ▶ cleaning the entire surface with WEICON Cleaner Spray S
- ▶ application of WEICON ST to restore the impeller strength
- ▶ sanding the entire repaired surface
- ▶ cleaning the sanded surface with WEICON Cleaner Spray S
- ▶ application of WEICON Ceramic BL as final coating/finish (in two layers)



Cleaner Spray S

▶ 500 ml
10000147



WEICON ST

▶ 0,2 kg 10054396 ▶ 0,5 kg 10000900 ▶ 2,0 kg 10000903



WEICON Ceramic BL

▶ 0,2 kg 10054394 ▶ 0,5 kg 10000093 ▶ 2,0 kg 10005233

Advantage of our solution:

- ▶ cost-effective repair instead of replacement
- ▶ durable protection against cavitation



Repairing the foundation of a conveyor system in a copper mine



Description:

- ▶ removing loose foundation parts
- ▶ creating formwork for the area to be repaired
- ▶ casting WEICON CBC into the formwork
- ▶ after curing: removing the formwork
- ▶ 1,700 kilograms WEICON CBC were used



WEICON CBC Chocking Backing Compound

- ▶ 0,5 kg
10064790
- ▶ 3,0 kg (2,0 l)
10045020
- ▶ 10,0 kg (6,6 l)
10032939

Advantage of our solution:

- ▶ increasing the safety and restoring the stability of the conveyor system



Bonding the cooler of an electric race car



Description:

- ▶ roughening the surface with emery cloth
- ▶ cleaning with WEICON Surface Cleaner
- ▶ application of WEICON Primer E 500 with clean, lint-free cloth
- ▶ leave Primer to flash off for approx. 10 to 20 minutes
- ▶ application of WEICON Black-Seal with Press Pack
- ▶ join the parts



Surface Cleaner

- ▶ 150 ml 10024317
- ▶ 400 ml 10024313



Primer E 500

- ▶ 250 ml 10035220



Black-Seal Special Silicone


- ▶ 200 ml 10000763 Presspack



Advantage of our solution:

- ▶ easy application for building prototypes and small batches
- ▶ high temperature resistance
- ▶ no material distortion as caused by welding or soldering
- ▶ compensates production tolerances

Repair of a polyethylene tank used in agriculture

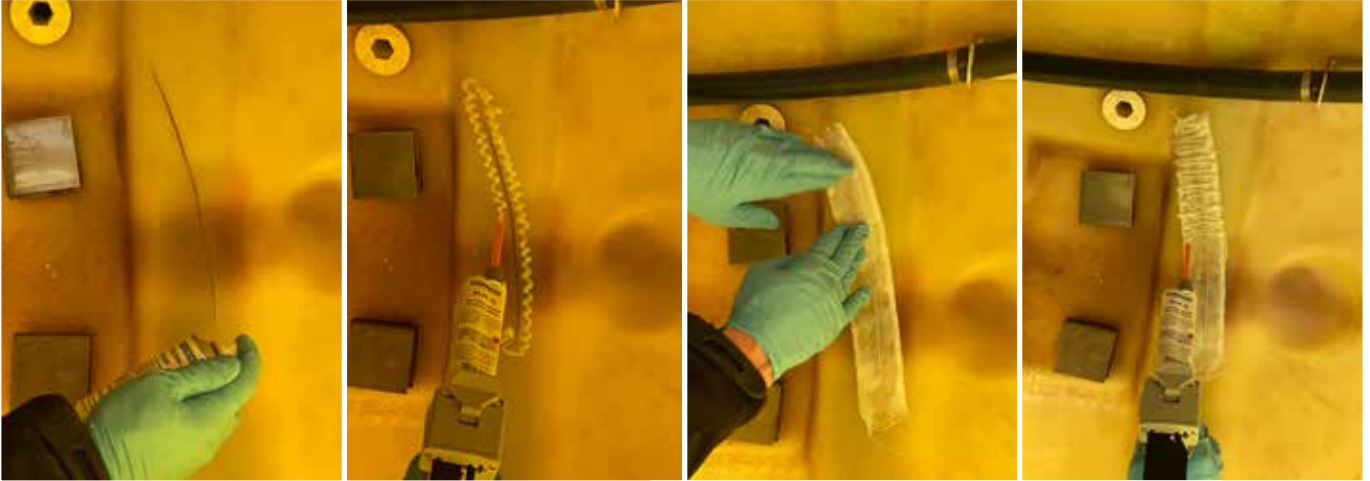

Description:

- ▶ cleaning with WEICON Surface Cleaner
- ▶ application of WEICON Easy-Mix PE-PP 45
- ▶ application of the Glass Fibre Cloth Tape
- ▶ second application of WEICON Easy-Mix PE-PP 45 to the tape
- ▶ spreading the adhesive by hand (gloves)
- ▶ curing: 24 hours at room temperature




Surface Cleaner

- ▶ 150 ml 10024317
- ▶ 400 ml 10024313



Easy-Mix PE-PP 45

- ▶ 45 ml
- 10057687
- pale yellow, transparent



Dispenser PE-PP

10023333

Mixing Nozzle PE-PP

10023115

Special Piston

10023341

To convert the Dispenser Easy-Mix D 50 to Easy-Mix PE-PP 45

Advantage of our solution:

- ▶ fast and cost-effective repair
- ▶ preventing environmental damages
- ▶ replacement of the tank not necessary

Repair and restoration of pumps in a tomato factory



Description:

- ▶ surface pre-treatment with sandblasting (SA 2½)
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ application of WEICON WR2 to fill cavitation damages
- ▶ final coating as wear protection with WEICON Ceramic BL



Cleaner Spray S

▶ 500 ml
10000147



WEICON WR2

▶ 0,2 kg 10054401 ▶ 0,5 kg 10000087 ▶ 2,0 kg 10000088



WEICON Ceramic BL


▶ 0,2 kg 10054394 ▶ 0,5 kg 10000093 ▶ 2,0 kg 10005233



Advantage of our solution:

- ▶ restoration of the full pump capacity
- ▶ avoiding higher costs of 1,800 EUROS

Restoring a corroded flange surface

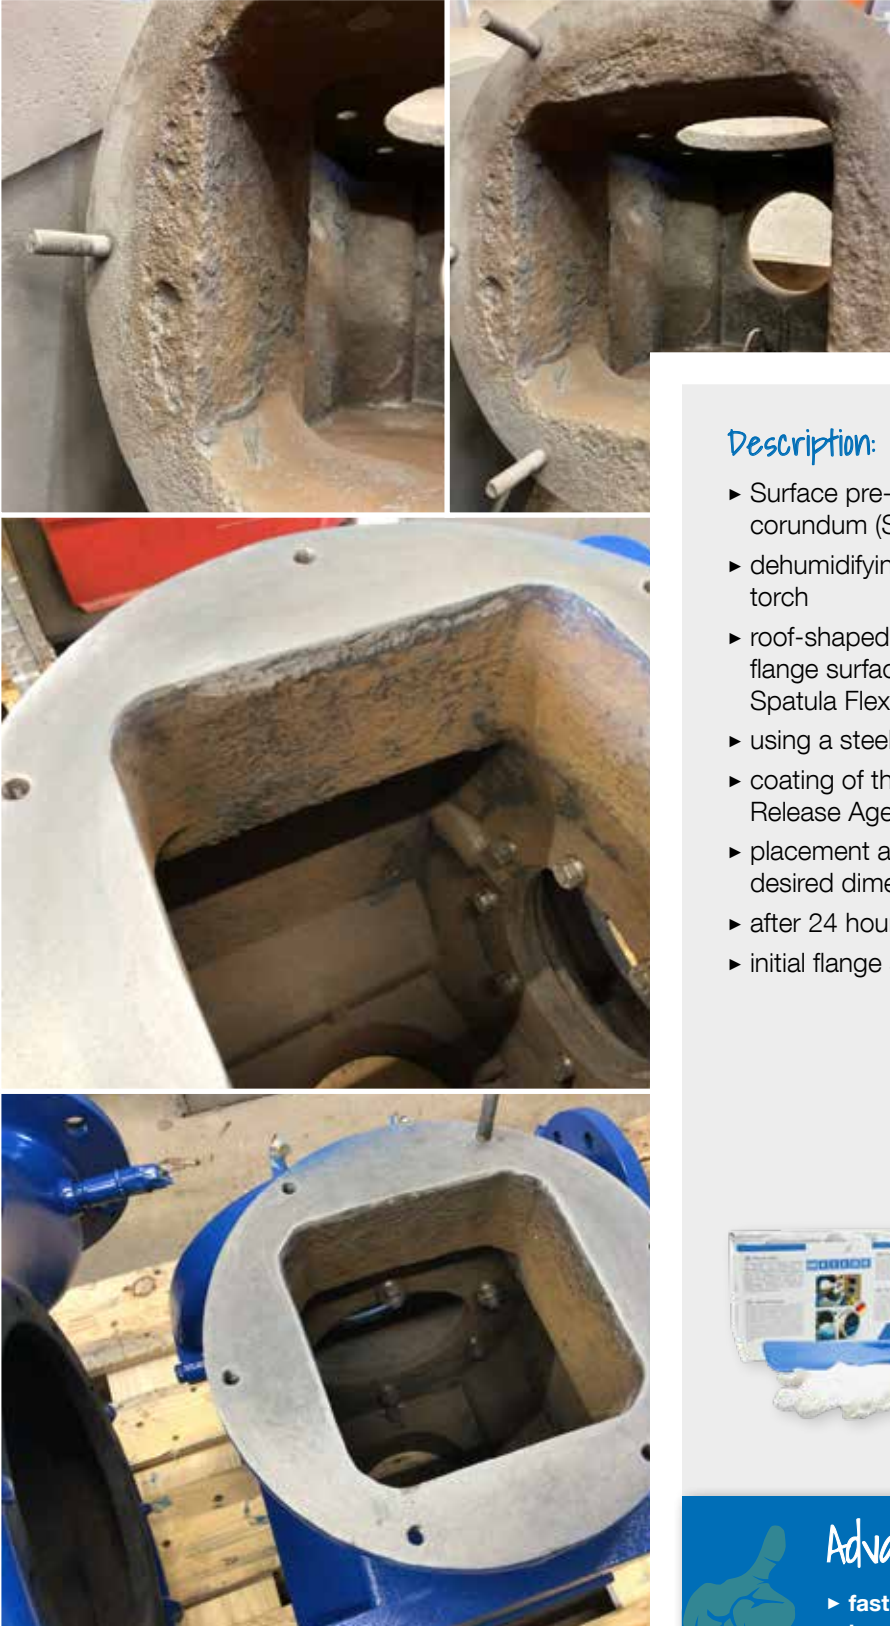

Description:

- ▶ Surface pre-treatment by sandblasting with corundum (SA 2½)
- ▶ dehumidifying the surface with acetylene oxygen torch
- ▶ roof-shaped application of WEICON HB 300 to the flange surface with the help of WEICON Contour Spatula Flexy
- ▶ using a steel sheet to copy the flange surface
- ▶ coating of the steel sheet with WEICON Mould Release Agent Wax P 500
- ▶ placement and assembly of the steel sheet to the desired dimension
- ▶ after 24 hours cure time: removal of the steel sheet
- ▶ initial flange surface is restored



Mould Release Agent Wax P 500

- ▶ 150 g 10026712
- ▶ 500 g 10026171



WEICON HB 300

- ▶ 0,2 kg 10004472
- ▶ 0,5 kg 10001084
- ▶ 1,0 kg 10000099

Advantage of our solution:

- ▶ fast and easy repair solution compared to long delivery times and replacement costs
- ▶ extension of the service life of the entire component

Repair of a shell and tube cooler



Description:

- ▶ pre-treatment with sandblasting (SA 2½)
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ first repair of damaged parts with WEICON HB 300
- ▶ final coating as wear protection with WEICON Ceramic BL



Cleaner Spray S

▶ 500 ml
10000147



WEICON HB 300

▶ 0,2 kg 10004472 ▶ 0,5 kg 10001084 ▶ 1,0 kg 10000099



WEICON Ceramic BL

▶ 0,2 kg 10054394 ▶ 0,5 kg 10000093 ▶ 2,0 kg 10005233



Advantage of our solution:

- ▶ recommissioning of the shell and tube cooler
- ▶ avoiding a replacement, thus saving costs

Inner coating of pumps



Description:

- ▶ pre-treatment with sandblasting
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ repairing the cavitation and corrosion damages with WEICON HB 300
- ▶ final coating as wear protection with WEICON Ceramic BL

Cleaner Spray S

- ▶ 500 ml
10000147



WEICON HB 300

- ▶ 0,2 kg 10004472
- ▶ 0,5 kg 10001084
- ▶ 1,0 kg 10000099



WEICON Ceramic BL

- ▶ 0,2 kg 100054394
- ▶ 0,5 kg 10000093
- ▶ 2,0 kg 10005233

Advantage of our solution:

- ▶ repairing worn pumps
- ▶ additional protection for new pumps
- ▶ cost-effective repair and long service life

Reproduction of a damaged damper foot



Description:

- ▶ production of a three-piece mould to recast the worn damper foot
- ▶ wetting of the mould with WEICON Mould Release Agent Liquid F 1000
- ▶ mixing of WEICON Urethane 60 and pouring into the mould (avoid air inclusions!)
- ▶ demoulding of the component after 24 h curing and installing it in the system



Mould Release Agent Liquid F 1000

▶ 1 L
10026167



Urethane 60

Shore hardness: A 60

▶ 500 g
10022363



Advantage of our solution:

- ▶ complete restoration of the vibration and shock absorption
- ▶ replacement, delivery times and thus downtime costs could be avoided

Repair of a tank lid



Description:

- ▶ removal of rust by sanding
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ sealing the damaged area with WEICON A



WEICON A

- ▶ 0,2 kg 10054381
- ▶ 0,5 kg 10000003
- ▶ 2,0 kg 10000006



Cleaner Spray S

- ▶ 500 ml 10000147

Advantage of our solution:

- ▶ avoiding welding
- ▶ fast, easy repair
- ▶ additional protective layer against new corrosion

Repair of the adapter sleeve of a shock absorber



Description:

- ▶ repair of the ring broken due to wrong assembly
- ▶ milling of small grooves with a diamond drill for gap bridging
- ▶ cleaning the surface with WEICON Cleaner Spray S
- ▶ generous application of WEICON Easy-Mix HT 180
- ▶ inserting the broken off piece
- ▶ removing the excess adhesive



Easy-Mix HT 180

▶ 50 ml
10044884



Cleaner Spray S

▶ 500 ml
10000147



Advantage of our solution:

- ▶ alternative to welding
- ▶ cost-effective repair
- ▶ avoiding the replacement of the component

Bonding illuminated signs



Description:

- ▶ sealing the aluminium
- ▶ cleaning with WEICON Surface Cleaner
- ▶ sealing the housing corners of the light box with WEICON Flex 310 M® HT 200
- ▶ painting/powder coating the light box
- ▶ application of WEICON Primer K 200 in the letter area
- ▶ application of Flex 310 M® Classic
- ▶ inserting the illuminated signs (plexiglass)



Surface Cleaner

- ▶ 150 ml 10024317
- ▶ 400 ml 10024313

Primer K 200

- ▶ 250 ml 10023567



Flex 310 M® HT 200

- ▶ 310 ml 10031149
- grey



Flex 310 M® Classic

- ▶ 310 ml 10002576
- white

VIDEO



Advantage of our solution:

- ▶ alternative to welding / no material distortion due to temperature
- ▶ elastic connection of the lighting elements
- ▶ high weather resistance (changes in temperature)

Sealing and attaching sockets in feed containers made of polyethylene



Description:

- ▶ drilling holes and cutting threads in polyethylene feed containers
- ▶ cleaning the thread of socket and valve with WEICON Surface Cleaner
- ▶ application of WEICON Easy-Mix PE-PP 50
- ▶ screwing in the socket and valve



Surface Cleaner

- ▶ 150 ml 10024317
- ▶ 400 ml 10024313



Easy-Mix PE-PP 50

- ▶ 50 ml 10058667
- pale yellow, transparent



Dispenser D50

10005237

Quadro Mixing Nozzle

10029793



Advantage of our solution:

- ▶ high sealing effect
- ▶ good resistance to loosening
- ▶ easy and cost-effective assembly

Restoration of the rubber protective coating of a hydraulic line



Description:

- ▶ cutting out the damaged area
- ▶ masking the repair area to remove excess material before curing
- ▶ cleaning the surfaces with WEICON Cleaner Spray S
- ▶ application of WEICON Primer G to the repair area
- ▶ full-surface application of WEICON Urethane 85 to surface to be repaired



Cleaner Spray S

- ▶ 500 ml
- ▶ 10000147



Primer G

Special bonding agent for urethanes for the pre-treatment of rubber and metal surfaces

- ▶ 50 g
- ▶ 10057199



Urethane 85

Shore hardness: A 85

- ▶ 500 g
- ▶ 540 g
- ▶ 10057130
- ▶ 10057188
- Work Package
- Cartridge

Advantage of our solution:

- ▶ restoration of the protective coating
- ▶ safe and permanent operation of the system
- ▶ high adhesive strength and elasticity

Bonding of salt stones in a dry-aging cooling chamber



Description:

- ▶ cleaning the walls with WEICON Surface Cleaner
- ▶ application of WEICON Flex 310 M® Classic
- ▶ bonding the salt stones



Surface Cleaner

- ▶ 150 ml 10024317
- ▶ 400 ml 10024313



Flex 310 M® Classic

- ▶ 310 ml 10002576 white



Advantage of our solution:

- ▶ reliable adhesive with ISEGA certificate for use in the food industry
- ▶ easy assembly

Restoration of the edge mill of a pellet press



Description:

- ▶ sandblasting of the press container/edge mill
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ application of WEICON WR2 with spatula and smoothing trowel
- ▶ subsequent curing for 24 h at 60°C (industrial oven)
- ▶ sanding the surface of the applied material WEICON WR2
- ▶ application of the final coating with WEICON Ceramic BL with a customary foam roller



WEICON WR2

- ▶ 0,2 kg 10054401
- ▶ 0,5 kg 10000087
- ▶ 2,0 kg 10000088



Cleaner Spray S

- ▶ 500 ml 10000147



WEICON Ceramic BL

- ▶ 0,2 kg 10054394
- ▶ 0,5 kg 10000093
- ▶ 2,0 kg 10005233

Advantage of our solution:

- ▶ maintenance and restoration of worn system components
- ▶ service life extension and sustainable use

Repair of a roller fender on a quay wall



courtesy and copyright of ShibataFenderTeam

Description:

- ▶ damages on a roller fender on a quay wall
- ▶ application of WEICON Primer G
- ▶ filling the damaged areas with WEICON Urethane 85



Urethane 85

Shore hardness: A 85

▶ 500 g

10057130
Work Package

▶ 540 g

10057188
Cartridge



Primer G

Special bonding agent for urethanes for the pre-treatment of rubber and metal surfaces

▶ 50 g


10057199



Advantage of our solution:

- ▶ fast and cost-effective repair solution
- ▶ excellent mechanical strength and elasticity
- ▶ durable wear protection

Repair of a catamaran

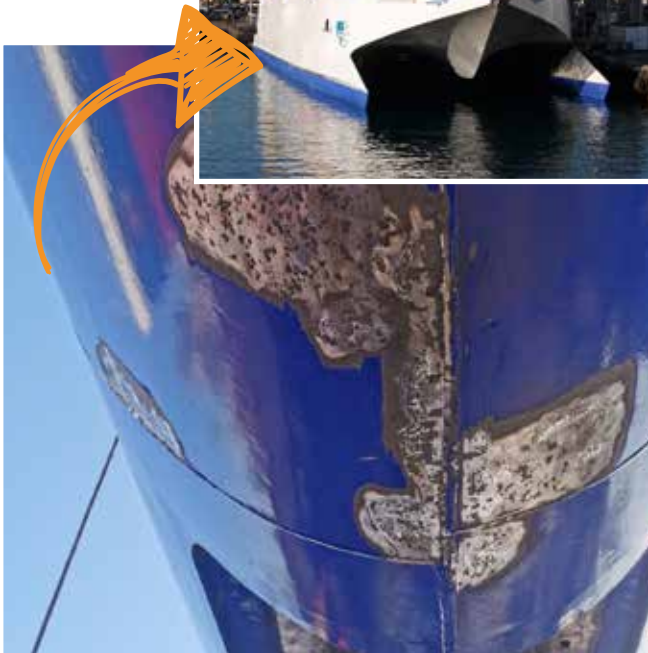

Description:

- ▶ sandblasting (SA 21/2) of the damaged areas
- ▶ application of WEICON HP
- ▶ final coating after curing with WEICON Ceramic BL
- ▶ 48 kg WEICON HP and 36 kg WEICON Ceramic BL were used on an area of 16 square metres



WEICON HP

- ▶ 0,2 kg 10054393
- ▶ 0,5 kg 10054003
- ▶ 2,0 kg 10054004



WEICON Ceramic BL


- ▶ 0,2 kg 10054394
- ▶ 0,5 kg 10000093
- ▶ 2,0 kg 10005233

Advantage of our solution:



- ▶ fast and precise repair
- ▶ reconditioning of the hull surface
- ▶ strengthening the material against new cavitation damages
- ▶ efficiency of the hull remains intact

Bonding ID chips to chip nest on waste bins

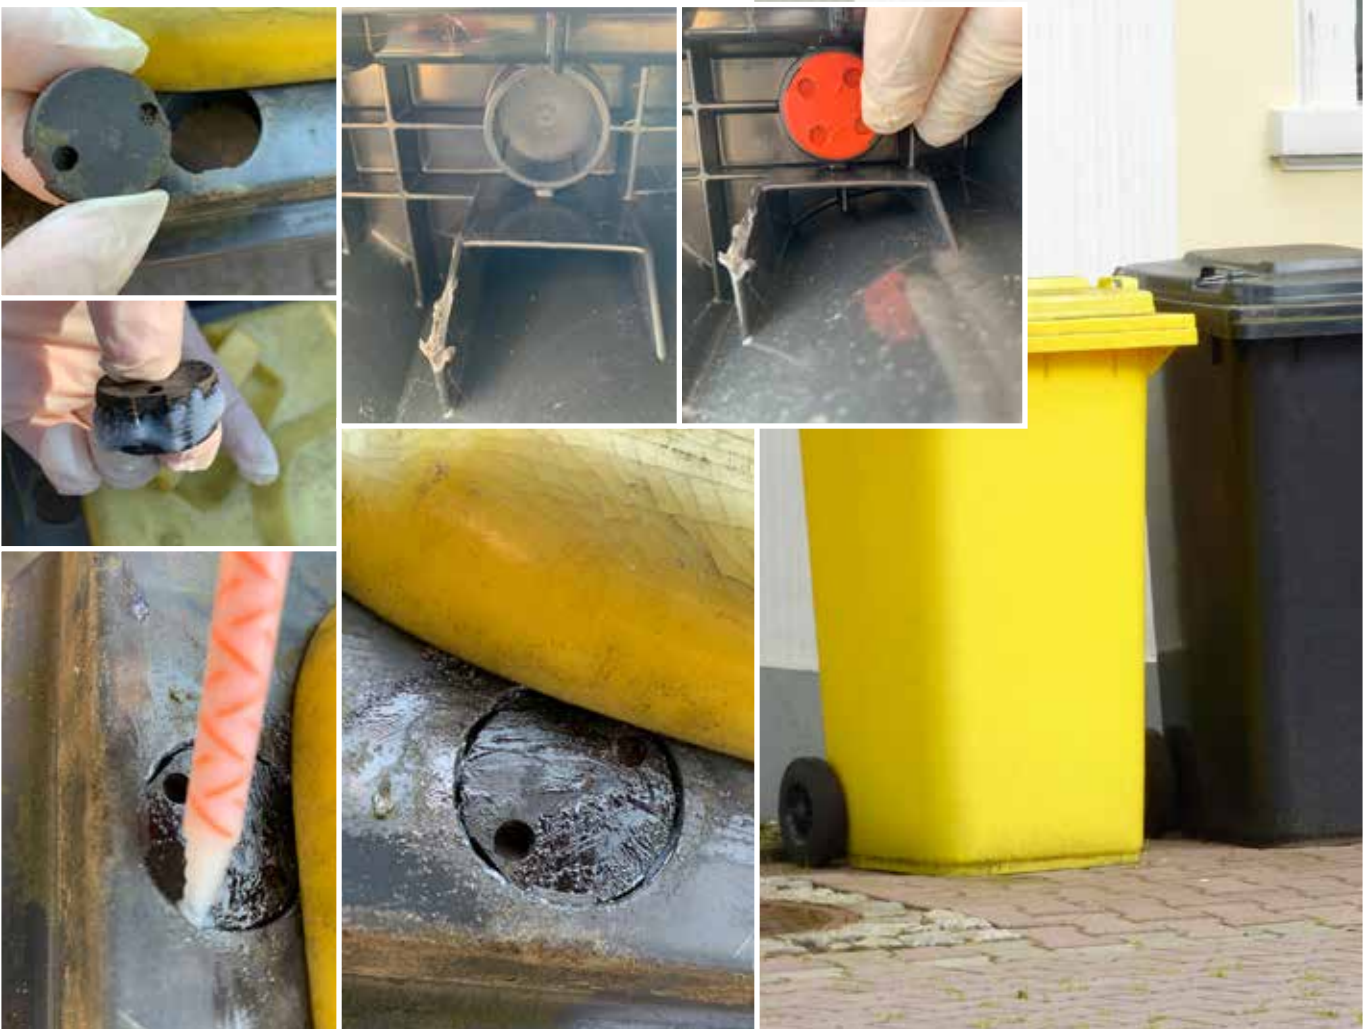

Description:

- ▶ cleaning the surfaces with WEICON Surface Cleaner
- ▶ bonding the transponder chips with WEICON Easy-Mix PE-PP 45



Surface Cleaner

- ▶ 150 ml 10024317
- ▶ 400 ml 10024313



Easy-Mix PE-PP 45

- ▶ 45 ml 10057687

Dispenser PE-PP

- 10023333

Mixing Nozzles PE-PP

- 10023115

Special Piston

- 10023341

To convert the Dispenser Easy-Mix D 50 to Easy-Mix PE-PP 45



Advantage of our solution:

- ▶ high-strength, impact-resistant bonding of the low surface energy plastic polyethylene
- ▶ fast, durable and easy attachment of the chip



Bonding stainless steel sheets to aluminium



Description:

- ▶ cleaning with Cleaner Spray S
- ▶ full-surface bonding of the stainless steel sheets to the aluminium surface with WEICON Flex 310 M® Classic



Cleaner Spray S

▶ 500 ml
10000147



Flex 310 M® Classic

▶ 310 ml
10010026
grey

Advantage of our solution:

- ▶ visually appealing bond
- ▶ high weather resistance
- ▶ high elasticity corresponding to thermal expansion

Gap compensation on a press plate in a quarry



Description:

- ▶ the support surface of a burst, 400kg heavy press plate did not show 100% force closure anymore
- ▶ previous solution: replacing the press plate every two months
- ▶ cleaning with WEICON Cleaner S
- ▶ generous application of WEICON HB 300 to the surface and fixings



Cleaner S

- | | | | |
|----------|----------|----------|----------|
| ▶ 1 L | ▶ 5 L | ▶ 10 L | ▶ 28 L |
| 10007611 | 10000347 | 10000348 | 10053455 |

Advantage of our solution:



- ▶ gap filling with WEICON HB 300
- ▶ avoiding having to replace the press plate
- ▶ cost savings of approx. 35,000 € – for the new press plates



WEICON HB 300

- | | | |
|----------|----------|----------|
| ▶ 0,2 kg | ▶ 0,5 kg | ▶ 1,0 kg |
| 10004472 | 10001084 | 10000099 |

Levelling an access ramp on a drive-through platform scale

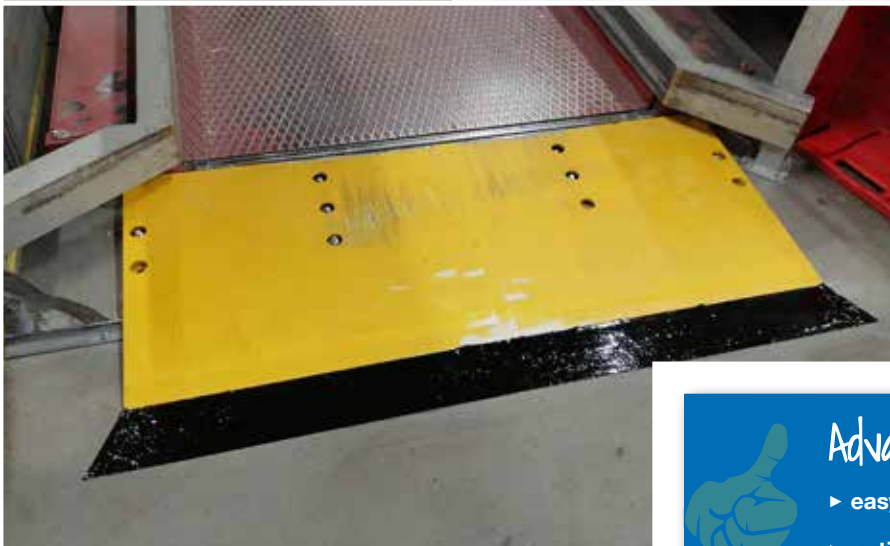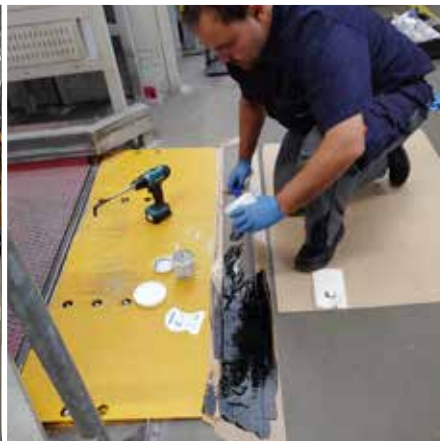

Description:

- ▶ roughening the concrete surface with an angle grinder and subsequent suction of the grinding dust
- ▶ application of WEICON Primer G
- ▶ after allowing the primer to flash off for 20 minutes, application of WEICON Urethane 85
- ▶ levelling the surface (ramp angle) with a gage



Belt Repair-Kit 590

- ▶ 540 g + Primer G 50 g
- 10052425

VIDEO



Advantage of our solution:

- ▶ easy and quiet access
- ▶ optimising work safety
- ▶ minimising wear and tear on the wheels of industrial trucks

Bonding and coating a chair suspension



Description:

- ▶ complete sanding of the hot-dip galvanised surface with sandpaper
- ▶ cleaning with WEICON Surface Cleaner
- ▶ bonding the suspension with WEICON Easy-Mix RK-7100
- ▶ coating the suspension with WEICON Brushable Liquid Zinc Paint for an additional protective layer

Advantage of our solution:

- ▶ fast-curing, high-strength bond with residual elasticity
- ▶ particularly easy to apply thanks to the dosing system – even overhead
- ▶ The Brushable Liquid Zinc Paint serves as barrier layer and protects the adhesive bond against corrosion



Surface Cleaner

▶ 150 ml 10024317 ▶ 400 ml 10024313



Easy-Mix RK-7100

▶ 50 ml 10030534

Sealing a leak in a petroleum line



Description:

- ▶ sanding the damaged area
- ▶ cleaning with WEICON Cleaner S
- ▶ closing and sealing the damaged area with WEICON Repair Stick Steel
- ▶ stabilising, sealing and strengthening the damaged area with WEICON Repair-Tape



Cleaner S

- ▶ 1 L [10007611](#)
- ▶ 5 L [10000347](#)
- ▶ 10 L [10000348](#)
- ▶ 28 L [10053455](#)



Pipe Repair-Kit

- 5/15**
 - ▶ 5 cm x 1,5 m [10055737](#)
- 5/35**
 - ▶ 5 cm x 3,5 m [10055738](#)
- 10/35**
 - ▶ 10 cm x 3,5 m [10055740](#)



Advantage of our solution:

- ▶ fast and easy repair during ongoing operation
- ▶ avoiding welding and thus reducing potential danger (fire /explosion protection)
- ▶ solution resistant to pressure and substances

Bonding a door locking system in a bus



Description:

- ▶ pre-treatment with WEICON Cleaner Spray S
- ▶ bonding all components of the door locking system with WEICON Easy-Mix PE-PP 45 – both PP to PP and PP to glass



Cleaner Spray S

▶ 500 ml
10000147



Easy-Mix PE-PP 45

▶ 45 ml
10057687

Dispenser PE-PP

10023333


Mixing Nozzles PE-PP

10023115

Special Piston

10023341

To convert the Dispenser Easy-Mix D 50 to Easy-Mix PE-PP 45



Advantage of our solution:

- ▶ fast and easy solution for demanding bonding of low surface energy plastics
- ▶ the adhesive bond easily withstands high stresses, such as opening and closing of the doors

Production of truck axles



Description:

- ▶ cleaning with WEICON Cleaner Spray S
- ▶ securing the screws on the differential gear with WEICONLOCK® AN 302-71
- ▶ sealing the differential with WEICON Black-Seal
- ▶ sealing the vehicle components with WEICON Flex 310 M® 2 K

Cleaner Spray S

- ▶ 500 ml
10000147



AN 302-71

- ▶ 20 ml
10017326
- ▶ 50 ml
10017886
- ▶ 200 ml
10019980



Flex 310 M® 2 K

- ▶ 250 ml
10027733
grey
- ▶ Special mixing nozzle
10027692



Black-Seal Special Silicone

- ▶ 200 ml
10000763
Presspack



Advantage of our solution:

- ▶ the high-strength threadlocker, which is hard to disassemble and has a medium viscosity, withstands very high stresses
- ▶ good resistance of the silicone WEICON Black-Seal to gear oil
- ▶ full-surface bonding and bridging bonding gaps up to ten millimetres with WEICON Flex 310 M® 2 K



Bonding roller cones



Description:

- ▶ roughening the inside of the rollers with a drill and a brush attachment
- ▶ cleaning the roughened surfaces with WEICON Surface Cleaner
- ▶ use of WEICONLOCK AN 306-30 for Retaining Cylindrical Assemblies



Surface Cleaner

- ▶ 150 ml 10024317
- ▶ 400 ml 10024313



AN 306-30

- ▶ 20 ml 10016438
- ▶ 50 ml 10017887
- ▶ 200 ml 10020025

Advantage of our solution:



- ▶ adhesive withstands high rotation speeds and thus large torsion forces
- ▶ good suitability of WEICONLOCK AN 306-30 for the passive material combination aluminium and stainless steel
- ▶ easy and precise application thanks to the ergonomic WEICON Pen-System



Repair of oil pipelines



Description:

- ▶ corrosion damages due to stony layers and extreme temperature fluctuations on the pipes
- ▶ cleaning the damaged areas with WEICON Cleaner Spray S
- ▶ application of nearly one ton of WEICON HB 300 to 100 kilometres pipeline
- ▶ after curing additional wrapping with protective foil or coating with carbon fibre



Cleaner Spray S

- ▶ 500 ml
10000147



WEICON HB 300

- ▶ 0,2 kg
10004472
- ▶ 0,5 kg
10001084
- ▶ 1,0 kg
10000099

Advantage of our solution:

- ▶ inexpensive and long-lasting solution
- ▶ on-site repair – despite the ambient temperature and temperature of the streaming oil
- ▶ fast and easy application of WEICON HB 300

Repair of the piping of a limestone filter system



Description:

- ▶ pipes lined with rubber on the inside
- ▶ damages caused by abrasion due to the limestones
- ▶ first, application of WEICON WP in combination with steel plates
- ▶ then additional fixation of the damaged areas with WEICON Pipe Repair-Kit



WEICON WP

- ▶ 0,2 kg
10054399
- ▶ 2,0 kg
10032320
- ▶ 10,0 kg
10032939



WEICON Pipe Repair-Kit

- 5/15**
▶ 5 cm x 1,5 m
10055737
- 5/35**
▶ 5 cm x 3,5 m
10055738
- 10/35**
▶ 10 cm x 3,5 m
10055740

Advantage of our solution:

- ▶ high wear protection thanks to the WEICON WP and additional stability due to steel plates
- ▶ increased service life compared to a new connection piece




Mill lining



Description:

- ▶ mill lining with the epoxy resin systems WEICON WAL 04 and WEICON WAL 06
- ▶ WEICON WAL 04 is used for the round arch and WEICON WAL 06 for the front and end wall, as a higher dynamic load capacity is required there
- ▶ bonding gap: max. 5 mm

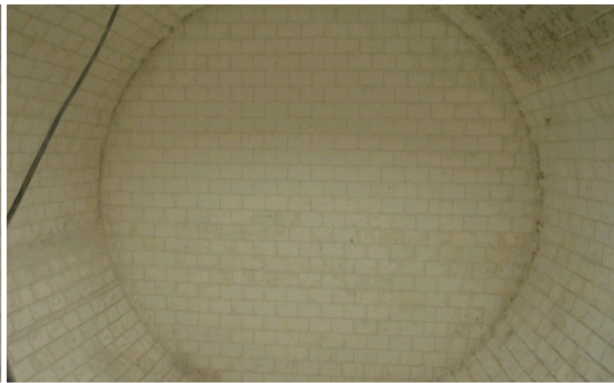

WEICON WAL 04

▶ 2,0 kg
10020990

WEICON WAL 06

▶ 2,0 kg
10030626

Advantage of our solution:

- ▶ high resistance of the epoxy resin systems
- ▶ high temperature resistance and high mechanical strength

Bearing repair on a crane runway



Description:

- ▶ heavy signs of wear on a crane runway due to erosion
- ▶ previous solution: repair with fitting pieces
- ▶ the heterogenous grinding of the concrete due to micro-vibrations was reconstructed with the casting of WEICON CBC



Injection Packer Set

- ▶ System for gap compensation on bridges, pillars, machines, and plants
- 10057667



WEICON CBC Chocking Backing Compound

- ▶ 0,5 kg 10064790
- ▶ 3,0 kg (2,0 l) 10045020
- ▶ 10,0 kg (6,6 l) 10032939


Advantage of our solution:

- ▶ WEICON CBC forms a direct and frictional contact to the foundation
- ▶ no cure shrinkage, high impact strength, very good resistance to pressure, media and ageing
- ▶ restoring the static properties of the crane runway



WEICON®

Simply find solutions.

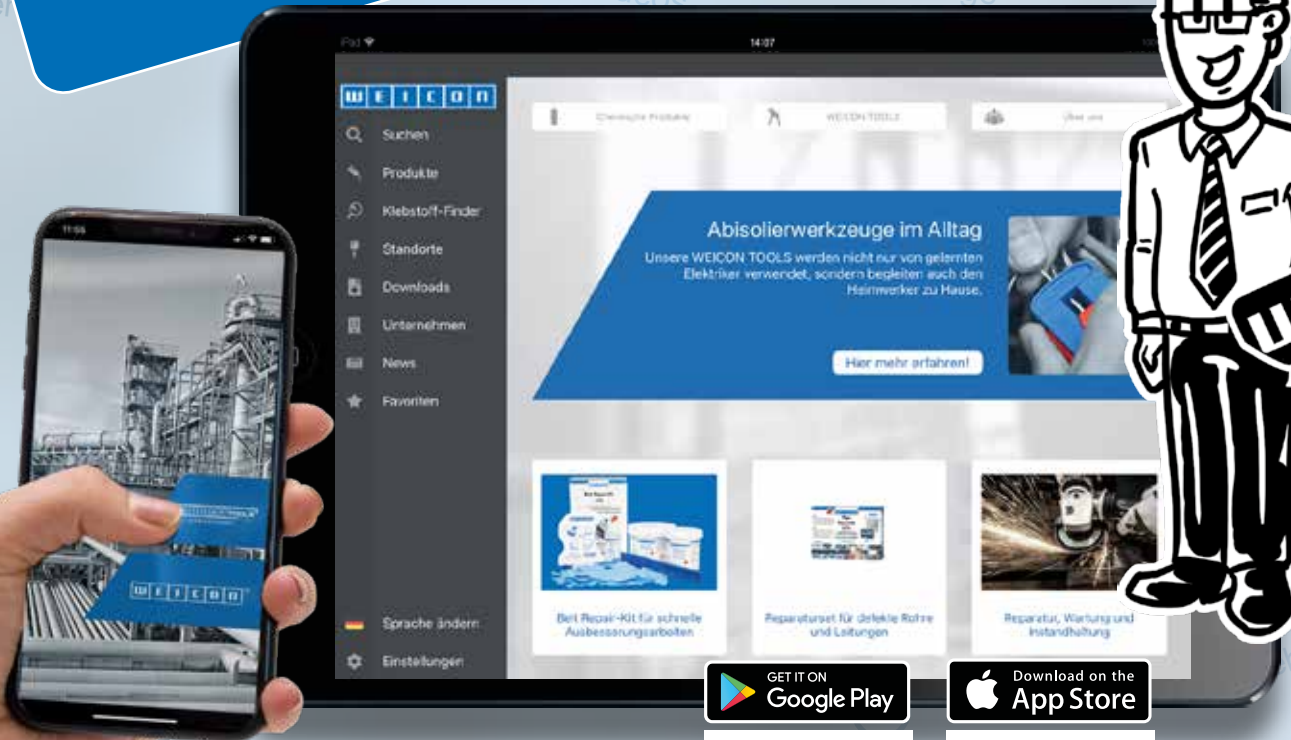

GET IT ON
Google Play

Download on the
App Store



You 



www.weicon.com

WEICON GmbH & Co. KG (Headquarters)

Königsberger Str. 255 · DE-48157 Münster
P.O. Box 84 60 · DE-48045 Münster
Germany
phone +49 (0) 251 9322 0
WhatsApp + 49 (0) 251 9322 393
info@weicon.de

WEICON Production GmbH

Vogelsrather Weg 25 · DE-41366 Schwalmtal
Germany
phone +49 (0) 2163 4998 079
production@weicon.de

WEICON Middle East L.L.C.

Jebel Ali Ind Area 1
P.O. Box 118 216 · Dubai
United Arab Emirates
phone +971 4 880 25 05
info@weicon.ae

WEICON Inc.

20 Steckle Place · Unit 20
Kitchener · Ontario N2E 2C3 · Canada
phone +1 877 620 8889
info@weicon.ca

WEICON Kimya Sanayi Tic. Ltd. Şti.

Orhan Gazi Mahallesi 16. Yol Sokak No: 6
34538 Hadimköy-Esenyurt · Istanbul
Türkiye
phone +90 (0) 212 465 33 65
info@weicon.com.tr

WEICON Romania SRL

Str. Podului Nr. 1
547176 Budui Mic (Targu Mures) · Romania
phone +40 (0) 3 65 730 763
office@weicon.com

WEICON SA (Pty) Ltd

Unit No. D1 · Enterprise Village
Capricorn Drive · Capricorn Park
Muizenberg 7945 (Cape Town) · South Africa
phone +27 (0) 21 709 0088
info@weicon.co.za

WEICON South East Asia Pte Ltd

7 Soon Lee Street
#01-11 iSPACE · Singapore 627608
Phone (+65) 6710 7671
info@weicon.com.sg

WEICON Czech Republic s.r.o.

Teplická 305
CZ-417 61 Teplice-Bystřany
Česká republika
phone +42 (0) 417 533 013
info@weicon.cz

WEICON Ibérica S.L.

Av. de Somo Sierra 18, Nave 6
San Sebastián de los Reyes
28703 Madrid · Spain
phone +34 (0) 914 7997 34
info@weicon.es

WEICON Italia S.r.L.

Via Gelasio Adamoli, 35
16141 Genova · Italy
phone +39 010 2924 871
info@weicon.it

WEICON Colombia S.A.S

Calle 19, 43b-64
Medellín · Colombia
phone +57 310 837 37 99
info@weicon.co

www.weicon.com



Management
System
ISO 9001:2015
ISO 14001:2015

www.tuv.com
ID 9108636595



WEICON

**APPLICATIONS
AND PRODUCTS**

Art.-No. 10060461

Distributed by: