

# SPECIAL ADHESIVES

## HIGH TEMPERATURE RESISTANCE

- ▶ ideal adhesives for powder coating
- ▶ different chemical basis
- ▶ can be used on many different surfaces




[www.weicon.com](http://www.weicon.com)

- WEICON GmbH & Co. KG (Headquarters)  
Germany  
phone +49 (0) 251 9322 0  
info@weicon.de
- WEICON Middle East L.L.C.  
United Arab Emirates  
phone +971 4 880 25 05  
info@weicon.ae
- WEICON Inc.  
Canada  
phone +1 877 620 8889  
info@weicon.com  
www.weicon.ca
- WEICON Kimya Sanayi Tic. Ltd. Sti. - Türkiye  
phone +90 (0) 212 465 33 65  
info@weicon.com.tr  
www.weicon.com.tr
- WEICON Romania SRL  
Romania  
phone +40 (0) 3 65 730 763  
office@weicon.com
- WEICON Colombia S.A.S.  
Colombia  
phone +57 310 837 37 99  
info@weicon.co
- WEICON SA (Pty) Ltd  
South Africa  
phone +27 (0) 21 709 0088  
info@weicon.co.za
- WEICON South East Asia Pte Ltd  
Singapore  
phone +65 (65) 6710 7671  
info@weicon.com.sg
- WEICON Czech Republic s.r.o.  
Czech Republic  
phone +42 (0) 417 533 013  
info@weicon.cz
- WEICON Ibérica S.L.  
Spain  
phone +34 (0) 914 7997 34  
info@weicon.es
- WEICON Italia S.r.L.  
Italy  
phone +39 (0) 010 2924 871  
info@weicon.it

# MS-POLYMERS

The ideal adhesives for POWDER COATING

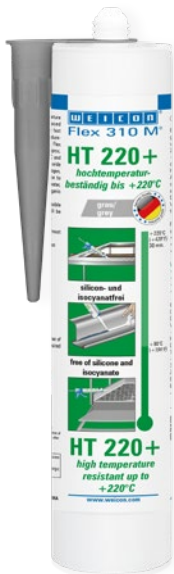

## Flex 310 M® HT 220+

Elastic and fast-curing I can be loaded once for approx. 30 minutes with temperatures up to +220 °C and permanently up to +90 °C | pasty

▶ 310 ml  
10067865  
grey



Left side: uncoated. Right side: powder-coated material.  
Flex 310 M® HT 200



## Flex 310 M® HT 200

Temperature resistance from -40 °C to +90 °C, briefly up to +200 °C | makes it possible to bond and seal components needing to be subsequently thermal-coated (powder-coated) | pasty

▶ 310 ml  
10031792  
grey

Meets the standard  
DIN EN 45545-2 R1/R7/R17 HL3

# EPOXY ADHESIVES



## Easy-Mix HT 250

Very high temperature resistance up to +200 °C (+392 °F), briefly up to +250 °C (+482 °F) | high adhesion to metals | high thermal conductivity and high resistance to aggressive media and powder coatings | pasty | pot life: 150 min.

▶ 50 ml  
10056568  
grey



## Easy-Mix HT 180

High temperature resistance | steady | shock and impact resistant | pasty | pot life: 60 min.

▶ 50 ml  
10044884  
black

