



WEICON Applications and Products

# MINING, CEMENT & HEAVY MATERIAL HANDLING



[www.weicon.com](http://www.weicon.com)

V 1.26

## Wear protection in mining



### DESCRIPTION

- ▶ surface preparation using coarse sandblasting, a Bristle Blaster or a grinding disc
- ▶ surface cleaning: complete removal of oil residues or lubricants
- ▶ WEICON HP as a primer on challenging substrates and under extreme conditions, such as vibration or high-impact edges
- ▶ application of WEICON WPN (suitable for fine dust and medium sized granules) with a layer thickness of 3-5 mm
- ▶ for layer thicknesses of 20 mm or more, WPG 19 should be used
- ▶ compress afterwards, otherwise the material will lose some of its properties

**TIP:** For low-friction substrates, applying a primer layer (e.g. WEICON Ceramic BL or WEICON Ceramic HC 220) is recommended to enhance sliding performance



#### Cleaner Spray S

- ▶ 500 ml
- ▶ 10000147



#### WEICON HP

- ▶ 0.2 kg ▶ 0.5 kg ▶ 2.0 kg
- ▶ 10054393 ▶ 10054003 ▶ 10054004



#### WEICON WPN

- ▶ 2.0 kg ▶ 13.62 kg
- ▶ 10056868 ▶ 10050041

### Advantages of our solution:

- ▶ no welding or disassembly of the component required
- ▶ significant increase in service life and reduction in wear
- ▶ minimisation of production interruptions and the associated downtime costs
- ▶ quick and easy repair
- ▶ suitable for reapplication following wear

## Coating a chute at a cement plant



### DESCRIPTION

- ▶ clean and degrease with WEICON Fast Cleaner
- ▶ sand the cleaned surface
- ▶ apply a thin layer of WEICON WL as a primer to ensure adhesion of the subsequent coating
- ▶ apply the main WEICON WPN coating evenly with a spatula
- ▶ allow to cure with a heat lamp and heating blanket for around 48 hours



#### Fast Cleaner

- ▶ 500 ml  
10039119



#### WEICON WL



- ▶ 0.2 kg  
10067876
- ▶ 0.5 kg  
10067882
- ▶ 2.0 kg  
10067887



#### WEICON WPN

- ▶ 2.0 kg  
10056868
- ▶ 13.62 kg  
10050041

### Advantages of our solution:

- ▶ very good wear protection
- ▶ protection of the base material

# Coating of an industrial wastewater channel in a quartz plant



## DESCRIPTION

- ▶ clean the surfaces of the channel segments with WEICON Cleaner Spray S
- ▶ apply WEICON Ceramic BL thoroughly into the channel edges with a brush, then continue the coating with the spray system
- ▶ after each spraying, clean the spray nozzle with WEICON Cleaner S to prevent the spray channels from clogging
- ▶ then apply WEICON Ceramic HC 220



### Cleaner S

- |                      |                    |                   |
|----------------------|--------------------|-------------------|
| ▶ 500 ml<br>10000147 | ▶ 1 L<br>10007611  | ▶ 5 L<br>10000347 |
| ▶ 10 L<br>10000348   | ▶ 28 L<br>10053455 |                   |



### WEICON Ceramic BL

- |                      |                      |                      |
|----------------------|----------------------|----------------------|
| ▶ 0.2 kg<br>10054394 | ▶ 0.5 kg<br>10000093 | ▶ 2.0 kg<br>10005233 |
|----------------------|----------------------|----------------------|




### WEICON Ceramic HC 220

- |                      |                      |                      |
|----------------------|----------------------|----------------------|
| ▶ 0.2 kg<br>10060702 | ▶ 0.5 kg<br>10060705 | ▶ 2.0 kg<br>10060707 |
|----------------------|----------------------|----------------------|

## Advantages of our solution:

- ▶ very good wear protection
- ▶ protection of the base material

# Coating of a baffle plate on a ball drum mill

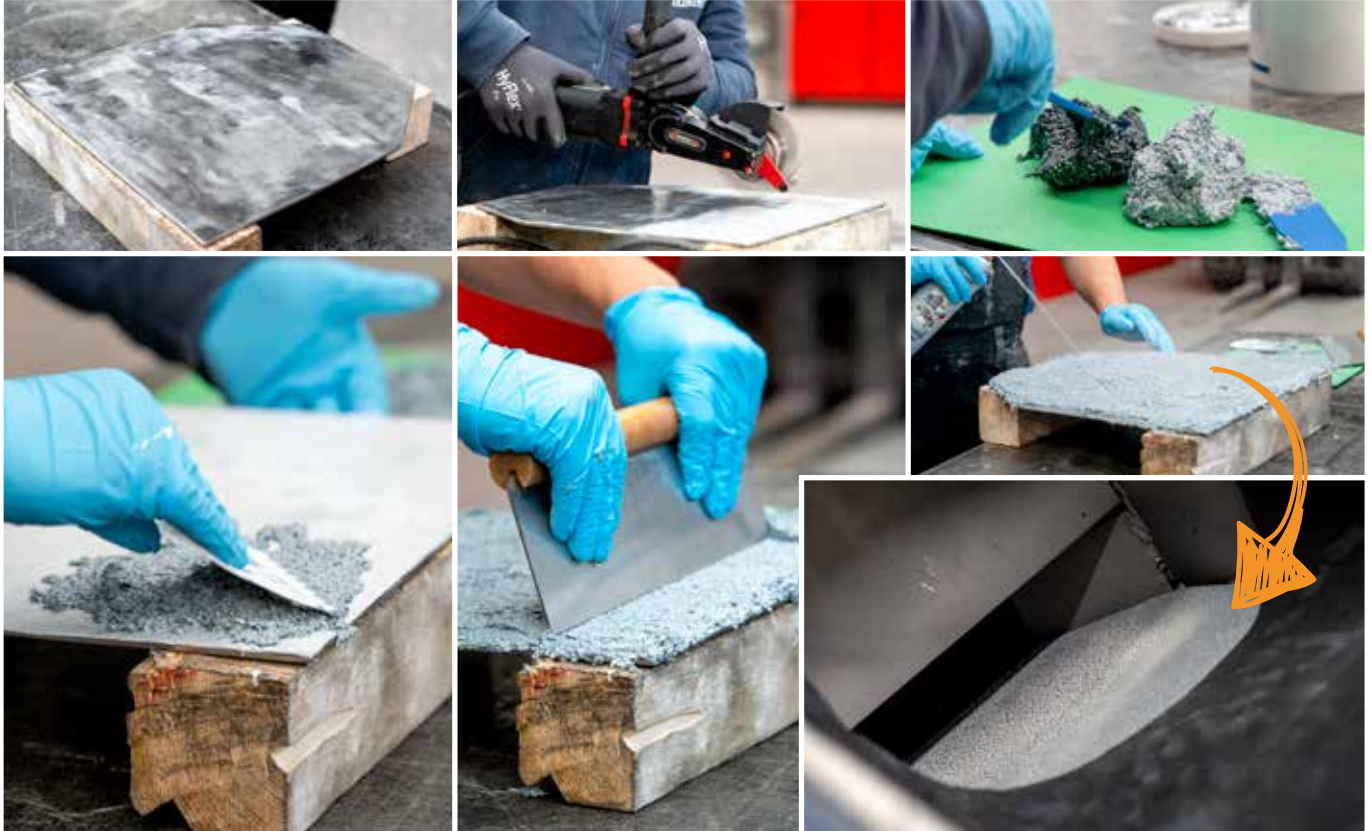

## DESCRIPTION

- ▶ roughen the surface with a Bristle Blaster
- ▶ clean the surface with WEICON Cleaner Spray S
- ▶ apply WEICON WL as a thin primer layer
- ▶ apply WEICON WPG-19 over the entire surface wet-on-wet (approx. 6 mm thick)
- ▶ use WEICON Industrial Cleaner to smooth and compact the surface



### Cleaner Spray S

- ▶ 500 ml
- ▶ 10000147

### Industrial Cleaner

- ▶ 500 ml
- ▶ 10055297



### WEICON WL



- ▶ 0.2 kg 10067876
- ▶ 0.5 kg 10067882
- ▶ 2.0 kg 10067887



### WEICON WPG-19

- ▶ 0.2 kg 10103061
- ▶ 0.5 kg 10103067
- ▶ 2.0 kg 10103073
- ▶ 10.0 kg 10103078



## Advantages of our solution:

- ▶ no welding or dismantling of the component required
- ▶ significant increase in service life and reduction in wear
- ▶ minimisation of production interruptions and the associated downtime costs
- ▶ quick and easy repair
- ▶ suitable for reapplication following wear

## Bonding a wheel and gearwheel in a gravel plant



### DESCRIPTION:

- ▶ cleaning with WEICON Surface Cleaner
- ▶ high-alloy and hardened steels are bonded with WEICONLOCK AN 306-38 Retaining Cylindrical Assemblies, applied in a circumferential and full-surface bead



#### Surface Cleaner

- ▶ 150 ml    ▶ 400 ml
- 10024317    10024313



#### AN 306-38

- ▶ 10 ml    ▶ 20 ml
- 10030478    10016443
- ▶ 50 ml    ▶ 200 ml
- 10017888    10020027



### Advantages of our solution:

- ▶ high frictional connection with high radial and axial forces



## Repair of conveyor belts in a quartz mine



### DESCRIPTION:

- ▶ removing coarse dirt
- ▶ roughening and levelling the damaged areas with an angle grinder (rasp disc or cup wheel)
- ▶ cleaning the surface with WEICON Cleaner Spray S
- ▶ mixing and applying WEICON 1K Primer G with a paint brush
- ▶ allow WEICON 1K Primer G sufficient time to flash off
- ▶ depending on the container application of WEICON Urethane 85
- ▶ smoothing the surface with WEICON Contour Spatula Flexy



#### Cleaner Spray S

- ▶ 500 ml
- ▶ 10000147



#### Belt Repair-Kit 550

- ▶ 500 g + 1K Primer G 50 g
- ▶ 10055014



#### Belt Repair-Kit 590

- ▶ 540 g + 1K Primer G 50 g
- ▶ 10052425



#### Dispenser 2C 10:1

- ▶ 10057514

VIDEO



### Advantages of our solution:

- ▶ very cost-effective way to restore the functioning of the conveyor belts and thus extension of the service life
- ▶ versatile application possibilities

## Mounting stoneware sewers with plastic pipes



### DESCRIPTION:

- ▶ installation of a dosing system due to the large material consumption
- ▶ gap-filling and bonding with generous application of WEICON Flex 310 M® 2 K
- ▶ with this type of drum dosing system, the adhesive is mixed only in the mixing nozzle



#### Flex 310 M® 2 K

- ▶ 250 ml
- ▶ special mixing nozzle
- 10027733
- 10027692
- grey

### Advantages of our solution:

- ▶ compared to other adhesives: elasticity, tolerance compensation, good sealing effect, high adhesive strength and curing independent of ambient conditions thanks to 2C system
- ▶ adhesive is only mixed in the mixing nozzle

## Repair of stirring units in a gold mine



### DESCRIPTION:

- ▶ abrasion on stirring units/ propellers caused by sand and stones
- ▶ sandblasting (SA 21/2) and cleaning with Cleaner Spray S
- ▶ reconditioning of the propeller blades by coating with WEICON WP
- ▶ 16 kilograms were used



### Cleaner Spray S

- ▶ 500 ml
- ▶ 10000147



### WEICON WP

- ▶ 0.2 kg
- ▶ 2.0 kg
- ▶ 10.0 kg
- ▶ 10054399
- ▶ 10032320
- ▶ 10032939

### Advantages of our solution:

- ▶ restoring the efficiency of the stirring units
- ▶ durable abrasion protection for longer service life

## Repairing the foundation of a conveyor system in a copper mine



### DESCRIPTION:

- ▶ removing loose foundation parts
- ▶ creating formwork for the area to be repaired
- ▶ casting WEICON CBC into the formwork
- ▶ after curing: removing the formwork
- ▶ 1,700 kilograms WEICON CBC were used



### WEICON CBC Chocking Backing Compound

- ▶ 0.5 kg ▶ 3.0 kg (2,0 l) ▶ 10.0 kg (6,6 l)
- 10064790 10045020 10032939

### Advantages of our solution:

- ▶ increasing the safety and restoring the stability of the conveyor system

## Gap compensation on a press plate in a quarry



### DESCRIPTION:

- ▶ the support surface of a burst, 400kg heavy press plate did not show 100% force closure anymore
- ▶ previous solution: replacing the press plate every two months
- ▶ cleaning with WEICON Cleaner S
- ▶ generous application of WEICON HB 300 to the surface and fixings



#### Cleaner S

▶ 1 L	▶ 5 L
10007611	10000347
▶ 10 L	▶ 28 L
10000348	10053455

### Advantages of our solution:

- ▶ gap filling with WEICON HB 300
- ▶ avoiding having to replace the press plate
- ▶ cost savings of approx. 35,000 € – for the new press plates



#### WEICON HB 300

▶ 0.2 kg	▶ 0.5 kg	▶ 1.0 kg
10004472	10001084	10000099

# Repair of a coal mill



## DESCRIPTION:

- ▶ over the years, the coal granulate had left clearly visible traces
- ▶ pre-cleaning with WEICON Cleaner Spray S
- ▶ making an exact applicator/a gauge
- ▶ reconditioning and restoration of the sealing surface using WEICON WP and WEICON WR2
- ▶ application of an additional protective layer with WEICON Ceramic BL



### Cleaner Spray S

▶ 500 ml  
10000147



### WEICON WP

▶ 0.2 kg   ▶ 2.0 kg   ▶ 10.0 kg  
10054399   10032320   10032939



### WEICON WR2

▶ 0.5 kg   ▶ 2.0 kg  
10000087   10000088



### WEICON Ceramic BL

▶ 0.2 kg   ▶ 0.5 kg   ▶ 2.0 kg  
10054394   10000093   10005233

## Advantages of our solution:

- ▶ economic and simple repair
- ▶ no welding or exchange of parts necessary
- ▶ extension of the service life of the coal mill

# Repair of a stone crusher plate in one of the largest quarries in the world



## DESCRIPTION:

- ▶ heavy wear and distortion on the panels due to friction and vibration
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ application of 50 kg WEICON WR on one panel
- ▶ total application of 400 kg WEICON WR on eight stone crusher plates



### Cleaner Spray S

- ▶ 500 ml  
10000147




### WEICON WR

- ▶ 0.2 kg  
10054400
- ▶ 0.5 kg  
10000077
- ▶ 2.0 kg  
10000078

## Advantages of our solution:

- ▶ perfect vibration and wear resistance
- ▶ high cost savings, as there is no need for complete replacement
- ▶ six-times longer service life
- ▶ fast, accurate, effective and long-lasting repair

## Gap compensation on a crusher in a grinding mill

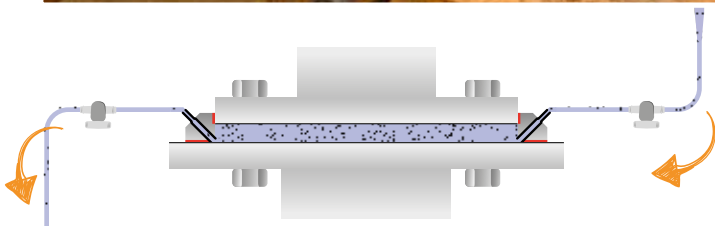

### DESCRIPTION:

- ▶ treatment of the inner ring with WEICON Silicone Spray to enable later disassembly
- ▶ attachment of injection packers with WEICON Easy-Mix PU-90
- ▶ use of WEICON Repair Stick Steel to seal the gap before casting
- ▶ injection of WEICON WR with the aid of the WEICON Injection Packer Set
- ▶ wear within 4 months, repair 4 times a year, wear from 100 mm to 20 mm
- ▶ approx. 20 kg used for one repair

### Advantages of our solution:

- ▶ precisely fitting, stable gap compensation
- ▶ smooth running of the mill ensured
- ▶ extension of the service life



#### Repair Stick Steel

- ▶ 57 g      ▶ 115 g
- 10010241    10007705



#### Injection Packer Set


- ▶ System for gap compensation on bridges, pillars, machines, and plants.
- 10057667



#### WEICON WR

- ▶ 0.2 kg      ▶ 0.5 kg      ▶ 2.0 kg
- 10054400    10000077    10000078

## Repair of a flange/sleeve in a gravel plant for fine sand extraction

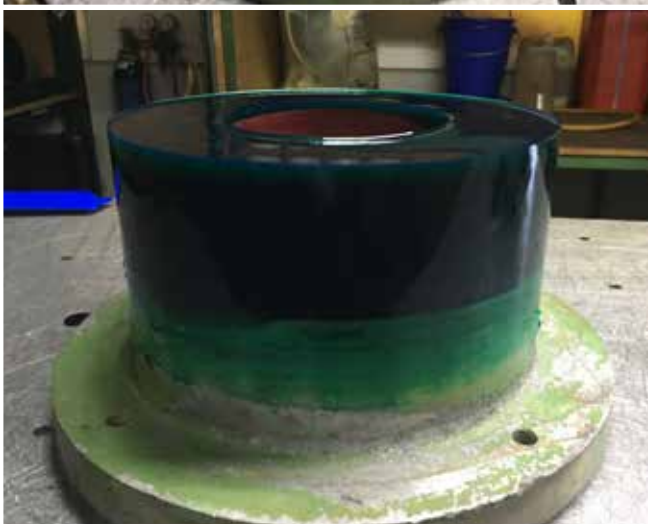

### DESCRIPTION:

- ▶ cleaning with WEICON Cleaner Spray S
- ▶ sandblasting (SA 2½)
- ▶ repeated cleaning with WEICON Cleaner Spray S
- ▶ wetting of the surfaces to be demoulded with WEICON Mould Release Agent liquid
- ▶ approx. 10 minutes flash-off time
- ▶ mixing of WEICON Urethane 80
- ▶ adding WEICON Colour Paste Black as required
- ▶ vacuum suction to avoid air bubbles
- ▶ pouring in the mixed WEICON Urethane 80
- ▶ heating the casting surface with a hot air gun to avoid air bubbles
- ▶ curing in the oven at approx. 60 °C for 24 hours
- ▶ use of compressed air to facilitate demoulding



### Cleaner Spray S

- ▶ 500 ml  
10000147

### Mould Release Agent

- ▶ 400 ml  
10000154



### Urethane 80

- ▶ 500 g  
10012368

VIDEO



### Advantages of our solution:

- ▶ fast repair of the machine part
- ▶ avoiding a replacement of special components
- ▶ high cost saving

# Repair of a conveyor belt



## DESCRIPTION:

- ▶ cleaning with WEICON Cleaner Spray S
- ▶ application of WEICON 1K Primer G for optimum adhesion
- ▶ working WEICON Urethane 85 into the rubber surface of the conveyor belt with WEICON Contour Spatula Flexy



Cleaner Spray S

▶ 500 ml  
10000147



Belt Repair-Kit

10052425

VIDEO



## Advantages of our solution:

- ▶ replacing the conveyor belt and complex vulcanisation not necessary
- ▶ fast and easy repair
- ▶ significant extension of the service life of the conveyor belt



## Repair of rubber pipelines in gravel plant



### DESCRIPTION:

- ▶ The pumping of sand causes erosion and cracks on the surface of the rubberised joints and connectors
- ▶ Previous solutions such as hot welding, pouring rubber or attaching patches with glue were insufficient, and consequently the parts had to be purchased anew
- ▶ Cleaning of larger holes and cracks with WEICON Cleaner Spray S, treatment with WEICON 1K Primer G
- ▶ Followed by filling with WEICON Urethane 85
- ▶ Outer protective layer with WEICON Urethane 80 and for reinforcement insert with Paracord



#### Cleaner Spray S

- ▶ 500 ml
- ▶ 10000147



#### WEICON Urethane 80

- ▶ 500 g
- ▶ 10012368



#### WEICON Urethane 85

- ▶ 500 g Work package
- ▶ 540 g Cartridge
- ▶ 10057130
- ▶ 10057188



### Advantages of our solution:

- ▶ extension of service life from 500 to 1200 hours
- ▶ cost-effective repair and maintenance

# Impeller repair in a cement factory



## DESCRIPTION:

- ▶ the raw material had become deeply ingrained in the impeller blades
- ▶ the impeller had a total of 14 blades that needed to be repaired
- ▶ the surface was mechanically cleaned and sanded
- ▶ it was cleaned with WEICON Cleaner Spray S
- ▶ this primer (bonding agent) was used: WEICON HP
- ▶ filling material: WEICON WPN
- ▶ top coat (smoothing layer): WEICON Ceramic HC 220
- ▶ for the success of the repair, it was essential that the surface be as smooth as possible
- ▶ all three products were applied wet-on-wet (pay attention to the layer curing times)
- ▶ after the repair was completed, the impeller had to be balanced



### Cleaner Spray S

- ▶ 500 ml
- ▶ 10000147



### WEICON HP

- ▶ 0.2 kg
- ▶ 0.5 kg
- ▶ 2.0 kg
- ▶ 10054393
- ▶ 10054003
- ▶ 10054004



### WEICON WPN

- ▶ 2.0 kg
- ▶ 13,62 kg
- ▶ 10056868
- ▶ 10050041



### WEICON Ceramic HC 220

- ▶ 0.2 kg
- ▶ 0.5 kg
- ▶ 2.0 kg
- ▶ 10060702
- ▶ 10060705
- ▶ 10060707

## Advantages of our solution:

- ▶ optimised maintenance

# Coating of a cyclone in the mining industry



## DESCRIPTION:

- ▶ Mechanical cleaning, substrate pre-treatment, cleaning with WEICON Cleaner Spray S
- ▶ Application of adhesive layer with WEICON HP
- ▶ After curing, application of a second coat with WEICON WP
- ▶ Embedding of 3 mm ceramic balls into the still wet surface
- ▶ After curing, final sealing with WEICON HP
- ▶ Abrasion protection coating against limestone particles of 3 to 4 mm in size



### Cleaner Spray S

▶ 500 ml  
10000147



### WEICON HP

▶ 0.2 kg 10054393    ▶ 0.5 kg 10054003    ▶ 2.0 kg 10054004



### WEICON WP

▶ 0.2 kg 10054399    ▶ 2.0 kg 10032320    ▶ 10.0 kg 10032939

## Advantages of our solution:

- ▶ protection against abrasion
- ▶ extension of service life
- ▶ no expensive purchase of new parts necessary



# Interior coating of the cladding of a bucket elevator in a salt mine



## DESCRIPTION:

- ▶ more than 120 m<sup>2</sup> of steel surface were coated using the spray method with 120 kg of WEICON GL-S and WEICON Ceramic HC 220
- ▶ in the bucket elevator, salt is transported upwards over six levels
- ▶ the interior of the bucket elevator is lined with steel sheets, which had been corroded by salt dust due to a simple paint coating inside
- ▶ cleaning with WEICON Cleaner Spray S after sandblasting
- ▶ the resin component was heated to approx. 50 °C before mixing
- ▶ application of a layer of WEICON GL-S
- ▶ application of a layer of WEICON Ceramic HC 220
- ▶ search for possible defects, followed by inspection of the layer thickness



### Cleaner Spray S

- ▶ 500 ml
- ▶ 10000147



### WEICON GL-S

- ▶ 0.2 kg 10060361
- ▶ 0.5 kg 10060362
- ▶ 2.0 kg 10060363



### WEICON Ceramic HC 220

- ▶ 0.2 kg 10060702
- ▶ 0.5 kg 10060705
- ▶ 2.0 kg 10060707

## Advantages of our solution:

- ▶ increases the intervals between service maintenance
- ▶ the condition of the coating is visible through the control layer (first layer), improving maintenance monitoring

## Filling the gap on a rotor shaft in a gravel washing plant



### DESCRIPTION:

- ▶ a 4 mm gap between the inner and outer shaft needed to be filled with WEICON WR, without air inclusions, to increase the shaft stability
- ▶ at intervals of one metre, threaded holes towards the gap were drilled in order to attach a hose with valve to them
- ▶ WEICON WR was pressed through the hose into the gap, until the top drill hole was reached
- ▶ after 24 hours, WEICON WR had completely cured



### WEICON WR

- |          |          |          |
|----------|----------|----------|
| ▶ 0.2 kg | ▶ 0.5 kg | ▶ 2.0 kg |
| 10054400 | 10000077 | 10000078 |

### Advantages of our solution:

- ▶ no need to purchase an expensive new component for the system
- ▶ can be produced directly in the workshop

VIDEO



# Maintenance work on the outlet base plate of a hopper in a mine



## DESCRIPTION:

- ▶ sandblasting, then removal of sandblasting residues (dust)
- ▶ cleaning the surface (using WEICON Cleaner S, WEICON Surface Cleaner)
- ▶ application of wear protection WEICON WP
- ▶ use of PE foil to compress and smooth out the surface



**Cleaner Spray S**

▶ 500 ml  
10000147



**Surface Cleaner**

▶ 150 ml    ▶ 400 ml  
10024317    10024313



**WEICON WP**

▶ 0.2 kg    ▶ 2.0 kg    ▶ 10.0 kg  
10054399    10032320    10032939

## Advantages of our solution:

- ▶ maintenance period extended from three to a minimum of six months, effectively doubling the service interval
- ▶ the plate can be recoated once the wear protection layer has worn away
- ▶ protects the base material
- ▶ reduces system downtime

## Repair/coating of a gravel hopper in a concrete plant



### DESCRIPTION:

- ▶ A heavily used bucket needed repairing
- ▶ Many years ago, the bucket was equipped with PU wear protection mats all around
- ▶ Over time, the mats have loosened, sand moisture and grit have infiltrated the mats and loosened them from the material support
- ▶ Preparation: Area calculation approx. 11.22 cm<sup>3</sup> / approx. 1.4 m<sup>2</sup>, marking, removal of damaged material
- ▶ Pre-treatment of the substrate: rust removal with Bristle Blaster, then cleaning with WEICON Industrial Cleaner
- ▶ Final cleaning with WEICON Industrial Cleaner
- ▶ Application of WEICON WR2 over a wide area
- ▶ After the drying phase, coating with WEICON Ceramic BL



#### Industrial Cleaner

- ▶ 500 ml  
10055297



#### WEICON WR2

- ▶ 0.2 kg  
10054401
- ▶ 0.5 kg  
10000087
- ▶ 2.0 kg  
10000088



#### WEICON Ceramic BL

- ▶ 0.2 kg  
10054394
- ▶ 0.5 kg  
10000093
- ▶ 2.0 kg  
10005233

### Advantages of our solution:

- ▶ low-cost permanent repair

## Repair of a centrifugal separator in a concrete plant



### DESCRIPTION:

- ▶ the polyurethane coating of the centrifugal separator had been damaged over time by conveying gravel and sand
- ▶ cleaning with WEICON Cleaner S
- ▶ application of WEICON 1K Primer G and flash-off time of approx. 30 minutes
- ▶ mixing of WEICON Urethane 85 resin and hardener thoroughly without air bubbles
- ▶ filling the damaged areas with WEICON Urethane 85
- ▶ application of WEICON Urethane 85 with WEICON Contour Spatula Flexy and paint brush and subsequent smoothing out



#### Cleaner Spray S

- ▶ 500 ml
- 10000147



#### Urethane 85

- ▶ 500 g
- ▶ 540 g
- 10057130
- 10057188
- Work Package
- Cartridge



#### 1K Primer G

- ▶ 50 g
- 10104191

### Advantages of our solution:

- ▶ fast and easy repair
- ▶ very good wear protection
- ▶ complete renewal of the polyurethane coating could be avoided
- ▶ high cost and time savings
- ▶ low material input (1 kg WEICON Urethane 85)

## Repair of a damaged area on the conveyor belt of a bucket elevator in the cement industry



### DESCRIPTION:

- ▶ removing coarse rubber residues from the damaged area
- ▶ roughening the repair area with abrasive cloth
- ▶ cleaning with WEICON Cleaner Spray S
- ▶ application of WEICON 1K Primer G
- ▶ application of WEICON Urethane 85



#### Cleaner Spray S

- ▶ 500 ml
- 10000147



#### Urethane 85

- ▶ 500 g
- ▶ 540 g
- 10057130
- 10057188
- Work Package
- Cartridge



#### 1K Primer G

- ▶ 50 g
- 10104191

### Advantages of our solution:

- ▶ ropes in the conveyor belt are protected against corrosion
- ▶ extension of the service life

# Coating of rotary valve in a cement plant



## DESCRIPTION:

- ▶ a mineral material is conveyed, which causes strong adhesion to the rotary valve and the scraper
- ▶ the stainless steel components (approx. 3.5 m<sup>2</sup>) were sandblasted, heated with a fan heater and then coated with a 2-layer system of WEICON Anti-Stick
- ▶ the use of WEICON Anti-Stick is intended to extend the service life



### WEICON Anti-Stick

- ▶ 0.2 kg 10062938
- ▶ 0.5 kg 10062940
- ▶ 2.0 kg 10062941

## Advantages of our solution:

- ▶ longer service life
- ▶ protection of the base material
- ▶ efficient performance



## Repair and protection of a screw conveyor in a copper mine



### DESCRIPTION:

- ▶ in copper mines, screw conveyors are used to transport ores and other materials. Particularly useful when the materials are fine-grained, powdery or loose. These materials are highly corrosive
- ▶ due to abrasion and wear, the blades lost up to 20 mm of metal
- ▶ the surface was roughened with a grinder to remove the protective paint and roughen the surface
- ▶ first, a layer of WEICON HP was applied as a primer
- ▶ then, a layer of WEICON WP was added “wet-on-wet” and compacted to make the surface as smooth as possible
- ▶ as a surface finish for visual inspection WEICON GL-S was added on one of the screws



#### Cleaner Spray S

- ▶ 500 ml
- 10000147



#### WEICON HP

- ▶ 0.2 kg
- ▶ 0.5 kg
- ▶ 2.0 kg
- 10054393
- 10054003
- 10054004



#### WEICON WP

- ▶ 0.2 kg
- ▶ 2.0 kg
- ▶ 10.0 kg
- 10054399
- 10032320
- 10032939



#### WEICON GL-S

- ▶ 0.2 kg
- ▶ 0.5 kg
- ▶ 2.0 kg
- 10060361
- 10060362
- 10060363

### Advantages of our solution:

- ▶ very good wear protection
- ▶ cost-effective repair and maintenance
- ▶ fast and reliable repair solution reducing down time considerably

**WEICON GmbH & Co. KG  
(Headquarters)**

Königsberger Str. 255 · DE-48157 Münster  
P.O. Box 84 60 · DE-48045 Münster  
Germany  
phone +49 (0) 251 9322 0  
WhatsApp + 49 (0) 251 9322 393  
info@weicon.de

**WEICON Middle East L.L.C.**

Jebel Ali Ind Area 1  
P.O. Box 118 216 · Dubai  
United Arab Emirates  
phone +971 4 880 25 05  
info@weicon.ae

**WEICON Inc.**

20 Steckle Place · Unit 20  
Kitchener · Ontario N2E 2C3 · Canada  
phone +1 877 620 8889  
info@weicon.ca

**WEICON Kimya Sanayi Tic. Ltd. Şti.**

Orhan Gazi Mahallesi 16. Yol Sokak No: 6  
34538 Hadimköy-Esenyurt · Istanbul  
Türkiye  
phone +90 (0) 212 465 33 65  
info@weicon.com.tr

**WEICON Romania SRL**

Str. Podului Nr. 1  
547176 Budiu Mic (Targu Mures) · Romania  
phone +40 (0) 3 65 730 763  
office@weicon.com

**WEICON SA (Pty) Ltd**

Unit No. D1 · Enterprise Village  
Capricorn Drive · Capricorn Park  
Muizenberg 7945 (Cape Town) · South Africa  
phone +27 (0) 21 709 0088  
info@weicon.co.za

**WEICON South East Asia Pte Ltd**

7 Soon Lee Street  
#01-11 iSPACE · Singapore 627608  
phone (+65) 6710 7671  
info@weicon.com.sg

**WEICON Czech Republic s.r.o.**

Teplická 305  
CZ-417 61 Teplice-Bystřany  
Česká republika  
phone +42 (0) 417 533 013  
info@weicon.cz

**WEICON Ibérica S.L.**

Av. del Camino de lo Cortao, 30  
nave 22, San Sebastián de los Reyes  
28703 Madrid · Spain  
phone +34 (0) 914 7997 34  
info@weicon.es

**WEICON Italia S.r.L.**

Via Gelasio Adamoli, 35  
16141 Genova · Italy  
phone +39 010 2924 871  
info@weicon.it

**WEICON Colombia S.A.S**

Calle 19, 43b-64  
Medellín · Colombia  
phone +57 310 837 37 99  
info@weicon.co

**WEICON Australia Pty Ltd**

Lot 9 · Unit 3, 55-65 Christensen Road  
Stapylton · QLD 4207 · Australia  
phone +61 (0) 452 553 384  
info@weicon.com.au

[www.weicon.com](http://www.weicon.com)



**WhatsApp-  
Service**



Management  
System  
ISO 9001:2015  
ISO 14001:2015

www.tuv.com  
ID 9108636595



Distributed by:

WEICON

**MINING, CEMENT &  
HEAVY MATERIAL  
HANDLING**

Art.-No. 10104484

Any product specifications and recommendations given in this flyer must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.