




FOCUS PRODUCTS

2026

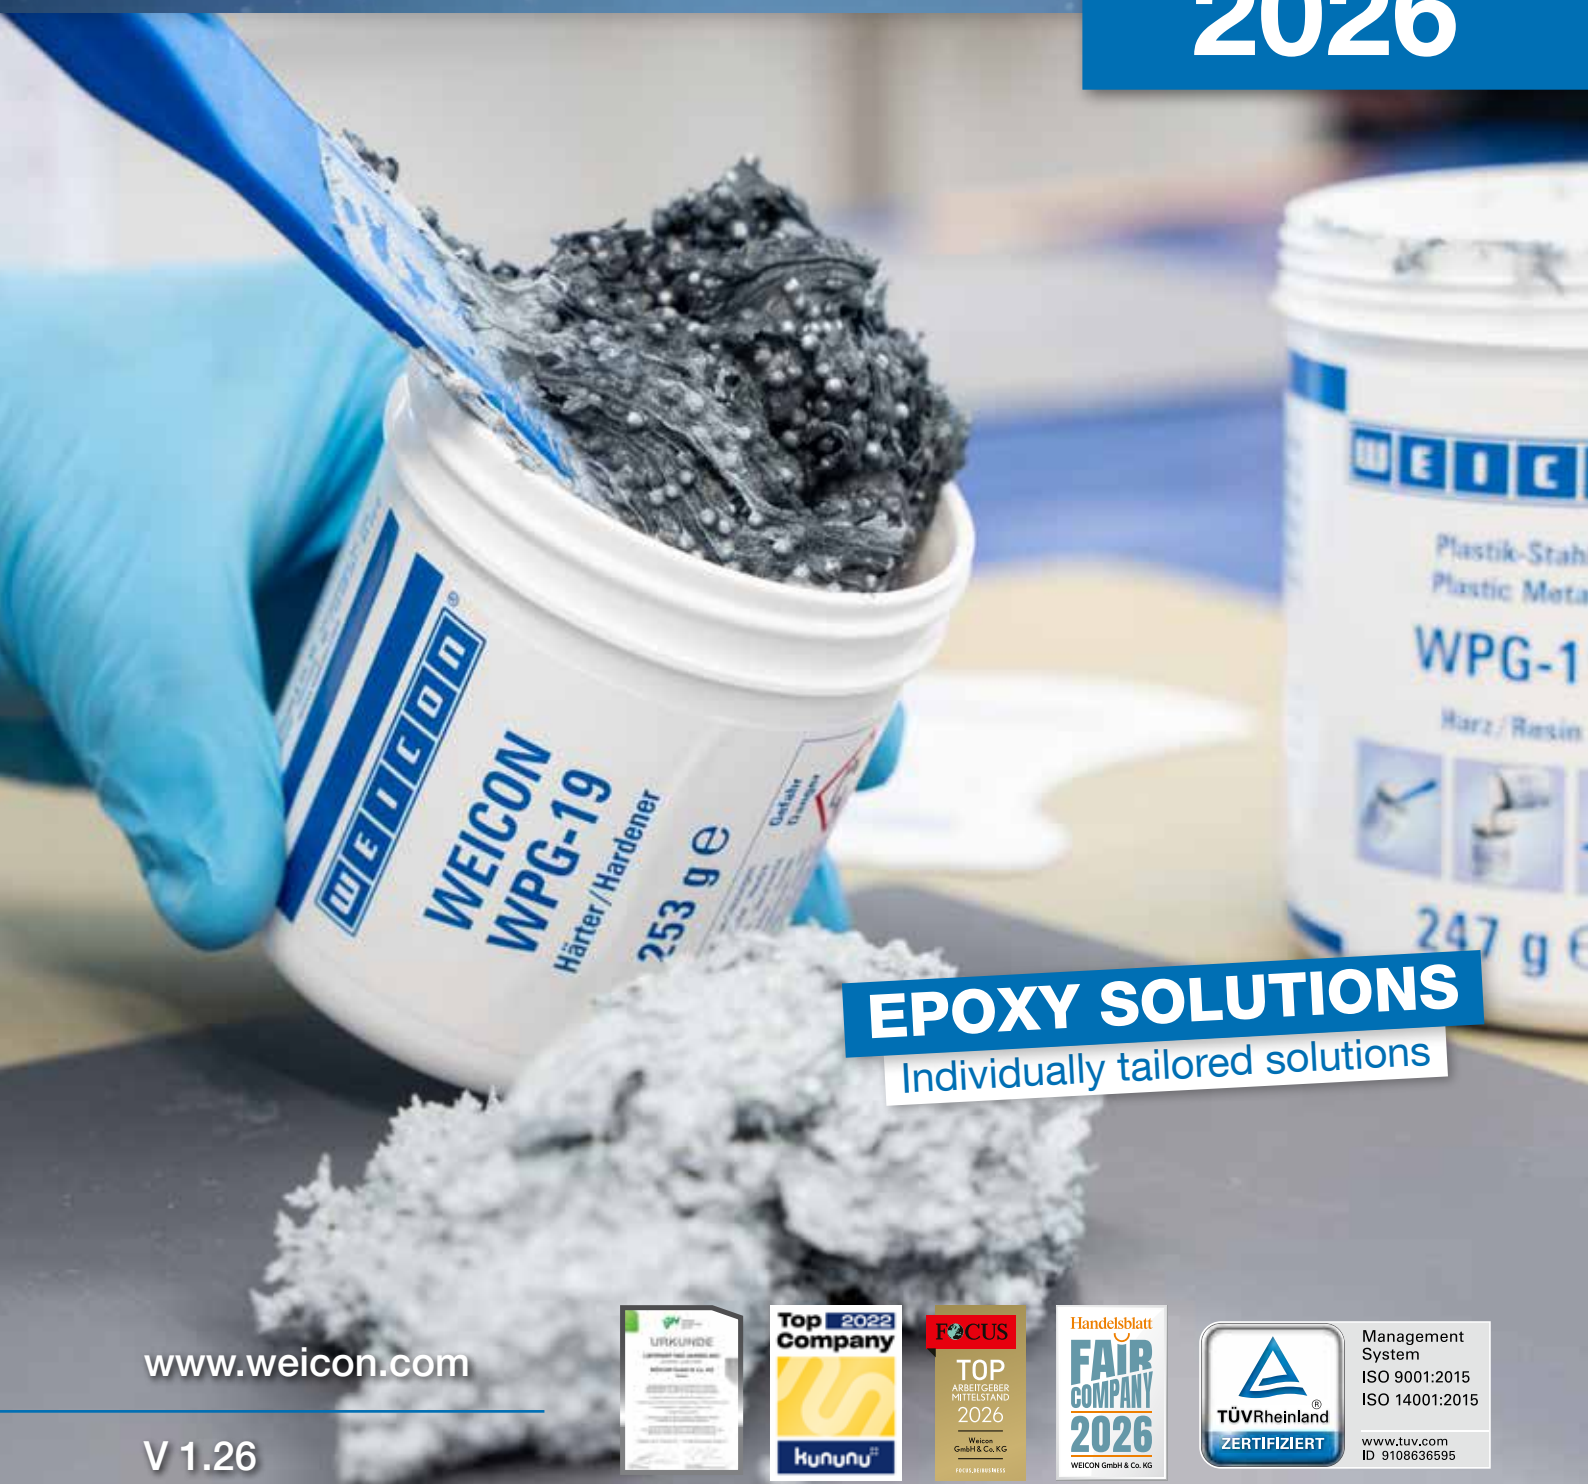

EPOXY SOLUTIONS
Individually tailored solutions



WEICON


EPOXY SOLUTIONS

We have decades of experience in developing high-performance epoxy resin systems for a wide range of international industrial sectors. Our range of coating systems, epoxy adhesives, versatile urethanes and practical repair sticks for quick repairs offers the right solution for any application.

Individually tailored
SOLUTIONS



WEICON Epoxy Solutions represents tried-and-tested specialist systems that have been successfully used worldwide across a variety of industries. If no ready-made solution is available, our experts develop a customised version precisely tailored to your specific requirements.




**PLASTIC METAL
SPRAY SYSTEM**



- ▶ Reliable processing
- ▶ Considerable time savings
- ▶ No risk of clogging



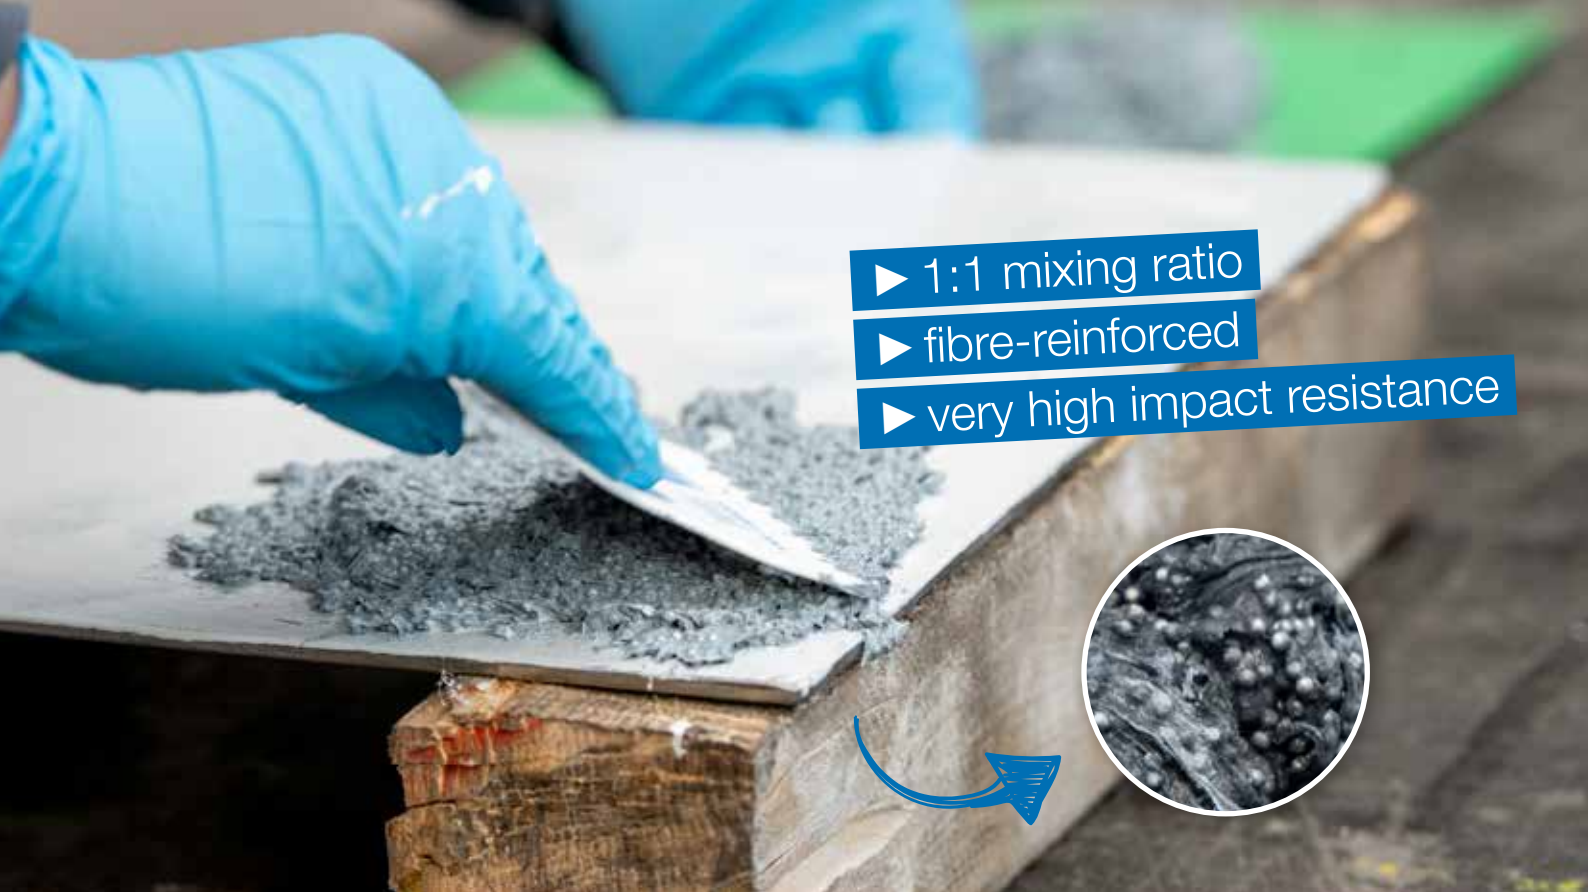

- ▶ 1:1 mixing ratio
- ▶ fibre-reinforced
- ▶ very high impact resistance

WPG-19

extreme wear protection | pasty | fibre-reinforced | ceramic-filled

WEICON WPG-19 is a fibre-reinforced, ceramic-filled, 2-component epoxy resin system. It is used as wear protection in industrial applications. The grey coating contains ceramic beads up to two millimetres in size and protects surfaces against erosion and abrasion caused by the impact of coarse particles. The system can be applied with a spatula. It is viscoplastic, highly impact-resistant and extremely resistant to abrasion. It is used for coating and lining various surfaces and components in industrial plants. It is used, for example, to protect gutters, bends, hoppers, tanks, chutes and many other processing systems that are exposed to abrasion and impact.

- ▶ 0.2 kg [10103061](#)
- ▶ 0.5 kg [10103067](#)
- ▶ 2.0 kg [10103073](#)
- ▶ 10.0 kg [10103078](#)



Technical Data WPG-19

Base	Epoxy
Colour	grey
Processing	
Component temperature	>3 °C above dew point
Mixing ratio by weight	1:1
Density of the mixture	2.2 g/cm ³
Curing	
Pot life	60 min.
Additional layer after	7 h
Working strength after	24 h
Final strength	42 h
Shrinkage	0.17%
Mechanical properties	
- measured after curing at	24 h RT + 24 h 60 °C
Tensile strength	23 MPa
Elongation at break (tensile)	1.1 %
E-modulus (tensile)	2,500 - 3,200 MPa
Hardness (Shore D)	82±3
Taber Test DIN ISO 9352 (H18, 1 kg, 1000 Umdr.)	0.5 g 0.22 cm ²
Lap shear strength material thicken. 1,5 mm	DIN EN 14665
Steel 1.0338 sandblasted	6 MPa
Stainless steel V2A sandblasted	6 MPa

EASY-MIX

PE-PP 50 SET

1:1
System

Thanks to its transparent curing, WEICON Easy-Mix PE-PP 50 is especially suitable for creating visually appealing adhesive bonds. Its special formula makes it ideal for zero-gap bonding and for connecting surfaces with extremely small bonding gaps of less than 0.2 mm.

- ▶ transparent
- ▶ pot life: 6 minutes
- ▶ bonding gap: 0 to 1 mm
- ▶ handling strength after 12 minutes



- ▶ transparent
- ▶ for small bonding gaps
- ▶ no pre-treatment necessary
- ▶ for low surface energy plastics:
PP | PE | HDPE
LDPE | HDP

Easy-Mix PE-PP 50 Set

Comprising:
Easy-Mix PE-PP 50 50 ml,
Helix Mixing Nozzle, Manual
Dispenser.

10103295



Technical Data Easy Mix PE-PP 50

Charakteristik	
Base	methyl methacrylate
Texture	paste
Colour	transparent
Minimum shelf life at room temperature	3 months
Minimum shelf life from +2 °C to +7 °C	12 months
Processing	
Processing procedure	Easy-Mix
Mixing ratio by weight	1:1
Viscosity of the mixture	20,000 mPa·s
Density of the mixture	1 g/cm ³
Gap bridging up to max.	0 - 1.00 mm
Curing	
Pot life at 20 °C	6 min.
Handling strength (35% strength)	12 min.
Final strength (100% strength)	24 h
Mechanical properties after curing	
Lap shear strength material thicken. 1,5mm DIN EN 1465	
Steel 1.0338 sandblasted	12 MPa
Stainless steel V2A sandblasted	11 MPa
Aluminium sandblasted	12 MPa
Galvanized steel	7 MPa
PVC-rigid roughened	12 MPa
CFRP	12 MPa
ABS	3 MPa
PC (polycarbonate)	6 MPa
GFRP	15 MPa
PMMA	8 MPa
Polyamide 6.6	2 MPa
PE-HD	12 MPa
PP (Polypropylen)	8 MPa
Thermal parameters	
Temperature resistance	-50 °C to +80 °C, briefly up to +100 °C

FOR ALL STANDARD
50 ML
DOUBLE CARTRIDGES

MANUAL DISPENSER


1:1 2:1



1:1



10:1



Application aid for Easy-Mix products in 50 ml cartridge. Pusher for mixing ratios 1:1, 2:1 and 10:1. Space-saving application aid for the toolbox.

- ▶ easy to use
- ▶ reliable results



▶ 1:1 / 2:1
10101999



▶ 10:1
10102860



Improved Formula:



HIGH-TEMPERATURE-RESISTANT UP TO

+180 °C

EPOXY MINUTE ADHESIVE



high-temperature resistant |
viscous | fast-curing

WEICON Epoxy Minute Adhesive is a universally applicable, two-component epoxy resin system. The adhesive is resistant to high temperatures up to +180 °C, viscous and self-levelling. It has a very short pot life and cures quickly. Epoxy Minute Adhesive bonds many different materials to each other, such as metal, plastic, fibre composite, ceramic, glass, stone or wood.

The transparent adhesive is suitable for craft applications or demanding DIY projects. It can also be used in trade fair and shop fitting, as well as for construction and assembly work. The Easy-Mix D 50 dispensing gun or the manual dispenser is required for processing Easy-Mix products in 50 ml containers.

► 24 ml
10000133

FAST-METAL MINUTE ADHESIVE



high-temperature resistant | gap-filling |
fast-curing

WEICON Fast-Metal Minute Adhesive is a 2-component epoxy resin system specifically developed for repairs and bonding applications where larger tolerances need to be bridged. Thanks to its gap-filling properties, the adhesive is suitable for rough and poorly fitting surfaces and fills cracks, cavities and uneven areas.

Fast-Metal Minute Adhesive is resistant to temperatures up to +180 °C and offers extremely strong adhesion even on vertical surfaces. The system is highly-filled, pasty, has a very short pot life and cures quickly. It allows for impact-resistant bonds with high tensile and impact strength. WEICON Fast-Metal Minute Adhesive can be used on numerous materials such as metal, plastic, fibre-reinforced materials, ceramics, glass, stone and wood.

The adhesive can be used in many areas of industry, in crafts and for demanding DIY projects.

► 24 ml
10007785

ALUMINIUM MINUTE ADHESIVE



resistant to high temperatures |
pasty | high impact resistance

Adhesive for bonding aluminium and other light metals to each other. WEICON Aluminium Minute Adhesive can be used to fill cracks and holes, for example in aluminium housings, and for repairing light alloy wheels.

Aluminium Minute Adhesive is a low-odour, two-component, aluminium-filled epoxy adhesive. It is resistant to high temperatures up to +180 °C and cures quickly at room temperature. After curing, the adhesive can be machined (filing, drilling, milling). Aluminium Minute Adhesive is gap-filling and non-dripping (thixotropic) and offers very high tensile and impact strength. To achieve optimal adhesion, the bonding surfaces should be dry and free from grease or dirt. Scraping or sanding the surfaces before cleaning additionally improves adhesion.

► 24 ml
10051229





EASY-MIX S 50



resistant to high temperatures |
extremely strong adhesion | very
short pot life

High-temperature resistant epoxy adhesive for fast repair and maintenance work. Perfect for industrial series production with short cycle times.

The adhesive offers high temperature resistance up to +180°C, extremely strong adhesion and high tensile strength. It is viscous, self-levelling, has a very short pot life and cures fast.

► 50 ml
10005230

EASY-MIX S 50 yellow



visually identifiable casting
compound | resistant to
high temperatures | fast-curing |
impact-resistant

Highly reactive casting compound – can also be used as an adhesive owing to its high adhesive strength and short curing time. The epoxy resin system, which is resistant to high temperatures of up to +180 °C, is viscous, self-levelling, cures quickly and is impact-resistant in its hardened state. The casting compound has a short pot life of 4-5 minutes and adheres excellently to many different surfaces.

► 50 ml
10017543

EASY-MIX METAL



high-temperature resistant | pasty |
fast-curing

Special 2-component epoxy resin system for bonding metal parts. Pasty, fast-curing and resistant to high temperatures up to +180 °C. Cures to form a viscoplastic and impact-resistant bond with high tensile and impact strength. Especially suitable for bonding applications where larger tolerances need to be bridged.

► 50 ml
10018047

EASY-MIX N 50

strong adhesion | viscous | long pot life

2-component epoxy adhesive for manufacturing processes. Thanks to long pot life, highly suitable for production processes with time-delayed assembly and positioning sequences. Impact-resistant, shock-resistant, self-levelling, viscous and with high tensile strength after curing. Can be used on numerous materials such as metal, plastic, fibre composites, ceramics, glass, stone or wood.

► 50 ml
10005231

EASY-MIX N 5000

transparent | strong adhesion |
short pot life

Transparent 2-component epoxy adhesive for bonds where an attractive appearance is important. Strong adhesion, liquid and self-levelling. Pot life of approx. 17 minutes. Can be used on numerous materials such as metal, plastic, fibre composites, glass, stone or wood. Suitable for areas where an attractive appearance is crucial: production of design objects, furniture manufacturing, trade fair construction, shop fitting etc.

► 50 ml
10016374



THE IDEAL COMBINATION:

OUR EPOXY ADHESIVES ARE ALSO AVAILABLE AS A SET



Easy-Mix S 50 Set

Comprising:

Easy-Mix S 50, Quadro Mixing Nozzle A, Manual Dispenser

► 50 ml

10102958

Epoxy Minute Adhesive Set

Comprising:

Epoxy Minute Adhesive, Wooden Spatula small, Mixing Nozzle Quadro, PE gloves

► Set

10057686

Aluminium Minute Adhesive Set

Comprising:

Aluminium Minute Adhesive, Wooden Spatula small, Mixing Nozzle Quadro, PE gloves

► Set

10058776

Fast-Metal Minute Adhesive Set

Comprising:

Fast-Metal Minute Adhesive, 2 x Wooden Spatula small, PE gloves

► Set

10058777

Technical Data

	Easy-Mix S 50	Easy-Mix S 50 yellow	Easy-Mix N 50	Easy-Mix N 5000	Easy-Mix Metal	Epoxy Minute Adhesive	Aluminium Minute Adhesive	Fast-Metal Minute Adhesive	
Base:	epoxy resin, non-filled	epoxy resin, non-filled	epoxy resin, non-filled	epoxy resin, non-filled	epoxy resin, high-filled	epoxy resin, non-filled	epoxy resin, aluminium-filled	epoxy resin, high-filled	
Texture:	liquid	liquid	liquid	liquid	pasty, gap-filling	liquid	viscous, gap-filling	pasty, gap-filling	
Colour:	pale yellow, clear	yellow	pale yellow	almost colourless, crystal clear	grey	pale yellow, clear	aluminium	grey	
Supplied in:	double cartridge	double cartridge	double cartridge	double cartridge	double cartridge	double syringe	double syringe	double syringe	
Minimum shelf life:	18 months	18 months	18 months	18 months	18 months	18 months	18 months	18 months	
Mixing proportion by volume resin / hardener (automatically):	1 : 1	1 : 1	1 : 1	1 : 1	1 : 1	1 : 1	1 : 1	1 : 1	
Pot life with 10 ml material at +20 °C (+68 °F)	4-5 min.	4-5 min.	35 min.	17 min.	4-5 min.	4-5 Min.	4-5 Min.	4-5 Min.	
Cure time at +20 °C (+68 °F)	Handling strength (35% strength) after:	13 min.	17 min.	3 h	3.5 h	20 min.	13 Min.	30 Min.	20 Min.
	Working strength (80% strength) after:	20 min.	30 min.	15 h	7 h	40 min.	20 Min.	1 h	40 Min.
	Final strength (100% strength) after:	24 h	24 h	48 h	48 h	24 h	24 h	24 h	24 h
Density of the mixture (g/cm ³):	1.2	1.2	1.1	1.1	1.8	1.2	1.2	1.8	
Viscosity of the mixture at +25 °C (+77 °F):	4,500 MPa	4,500 MPa	5,000 MPa	5,000 MPa	55,000 MPa	4,500 MPa	11,000 MPa	55,000 MPa	
Processing Temperature*1:	+15 to +40 °C (+50 to +104 °F)	+15 to +40 °C (+50 to +104 °F)	+15 to +40 °C (+59 to +104 °F)	+15 to +40 °C (+59 to +104 °F)	+15 to +40 °C (+50 to +104 °F)	+15 to +40 °C (+59 to +104 °F)	+15 to +40 °C (+59 to +104 °F)	+15 bis +40 °C (+59 bis +104 °F)	
Cure Temperature:	+6 to +40 °C (+43 to +104 °F)	+6 to +40 °C (+43 to +104 °F)	+6 to +40 °C (+43 to +104 °F)	+6 to +40 °C (+43 to +104 °F)	+6 to +40 °C (+43 to +104 °F)	+6 to +40 °C (+43 to +104 °F)	+6 to +40 °C (+43 to +104 °F)	+6 bis +40 °C (+43 bis +104 °F)	
Gap covering power to max.*2:	2 mm	2 mm	2 mm	2 mm	4 mm	2 mm	4 mm	4 mm	
Compressive strength MPa (DIN EN ISO 604):	55	30	80	10	30	55	40	30	
Tensile strength MPa (DIN EN ISO 527-2):	50	39	51	50	28	50	34	28	
Elongation at break (tensile) DIN EN ISO 527-2	2.7 %	2.0 %	3.6 %	2.4 %	0.6 %	2.7 %	1.1 %	0.6 %	
E-modulus (tensile) DIN EN ISO 527-2 MPa (ksi)	2,200 - 2,400 (320 - 350)	1,800 - 2,100 MPa (260 - 300)	1,900 - 2,200 (280 - 320)	2,000 - 2,300 (290 - 330)	4,100 - 4,600 (590 - 670)	2,200 - 2,400 (320 - 350)	2,200 - 2,700 (320 - 390)	4,100 - 4,600 (590 - 670)	
Bending strength MPa (psi) (DIN EN ISO 178):	58 (8,400)	58 (8,400)	50 (7,300)	50 (7,300)	58 (8,400)	58 (8,400)	58 (8,400)	58 (8,400)	
Hardness (Shore D) (DIN ISO 7619):	82±3	81±3	81±3	82±3	83±3	82±3	76 ± 3	83±3	
Lap shear strength material thicken, DIN EN 1465:									
Steel sandblasted N/mm ² :	22	21	22	16	20	22	18	20	
Stainless steel V2A sandblasted N/mm ² :	26	23	31	18	20	26	19	20	
Aluminium sandblasted N/mm ² :	13	12	14	11	10	13	15	10	
Galvanized steel N/mm ² :	16	13	22	13	19	16	17	19	
PVC-rigid roughened N/mm ² :	13	13	11	14	11	13	11	11	
Shrinkage:	1.41 %	1.06 %	0.08 %	0.97 %	0.49 %	1.41 %	0.8 %	0.49 %	
Temperature resistance:	-50 to +180 °C (-58 to +356 °F)	-50 to +180 °C (-58 to +356 °F)	-50 to +150 °C (-58 to +302 °F)	-50 to +100 °C (-58 to +212 °F)	-50 to +180 °C (-58 to +356 °F)	-50 to +180 °C (-58 to +356 °F)	-50 to +180 °C (-58 to +356 °F)	-50 to +180 °C (-58 to +356 °F)	
Tg after curing at room temp. (DSC):	44.7 °C	---	48.6 °C	52.4 °C	44.3 °C	44.7 °C	---	44.3 °C	
Tg after tempering at 120 °C (DSC):	---	---	49.8 °C	54.2 °C	-	---	---	-	

*1 For easier workability when ambient temperatures are low, the double cartridges should be warmed up to room temperature (20°C/+68°F) before application.

*2 These specifications depend on the type and condition of the bonding materials and are only relevant for adhesive bondings. When casting e.g. electronic components, a layer thickness of 10 mm should not be exceeded.

INNOVATION
HYBRID-
TECHNOLOGY

VA 2407

High-strength, fast-curing and process-safe 2-component structural adhesive based on cyanoacrylate. Suitable for fast and transparent bonding of e.g. plastic and rubber. Very good adhesion to a wide variety of materials. Pot life: approx. 5 minutes.

- ▶ high adhesion to a wide variety of materials
- ▶ bridges gaps up to 5 mm (non-drip)
- ▶ transparent
- ▶ very good moisture resistance
- ▶ universal use
- ▶ fast-curing
- ▶ strong adhesion

Technical Data VA 2407

Specific properties	2C cyanoacrylate
Base	ethyl acrylate
Texture	pasty
Colour	transparent
Processing	
Mixing ratio by weight	4:1
Viscosity 25 °C Cone / Plate	1,000 mPa·s
Density (+20 °C)	1.1 g/cm ³
Gap bridging up to max.	5 mm
Curing	
Initial adhesion in seconds (shear strength: 0,5 MPa) at 23 °C and 50% relative humidity	
on Aluminium sandblasted	10-30 sec.
on ABS untreated	180-240 sec.
on rigid PVC	90-150 sec.
Pot life at 20 °C, 10 g batch	5 min.
Final strength (100% strength)	24 h
Mechanical properties after curing	
Shear strength according to DIN EN 1465	
Steel sandblasted	16-21 MPa
Aluminium sandblasted	10-15 MPa
Rigid untreated PVC	10-14 MPa
Untreated ABS	13-15 MPa
PC (polycarbonate)	12-17 MPa
Thermal parameters	
Temperature resistance	-20 °C to +120 °C
Softening temperature	+150 °C
Flashpoint	+87 °C (+189 °F)
Thermal expansion coefficient	80 x 10 ⁻⁶ m/(m·K)
Thermal conductivity	0.1 W/m·K
Electrical parameters	
Resistance	> 10 ¹⁵ Ω·cm
Dielectric strength	25 kV/mm



▶ 10 g
10063086



Mixing Nozzle 10 g
10063091

POLYURETHANE SYSTEMS



URETHANE 85

Pasty polyurea repair and coating compound | Shore hardness: A 85

WEICON Urethane 85 is a 2-C polyurethane putty with excellent mechanical strength for the quick repair, touch-up and coating of rubber and metal pieces, which are exposed to shocks, abrasion, vibration or motion. It shows high elasticity as well as high wear resistance.

Urethane 85 is suitable for many applications, such as the repair of rubber components and conveyor belts, the repair and touch-up of rubber coatings, as flexible wear protection for pump housings and impellers as well as for the quick repair of worn-out seals and rubber rollers.

► 500 g
10057130
package

► 540 g
10057188
cartridge

URETHANE 85 SF

**High wear resistance | fast curing |
pasty | Shore hardness: A 85**

WEICON Urethan 85 SF is a special, pasty polyurethane for coating and repairing rubber surfaces. For example, conveyor belts in industrial plants, in open-pit mining or in mines can be repaired with the polyurethane. Urethan 85 SF has a very high wear resistance.

It is free of solvents and is applied at room temperature. Before processing, the surface to be treated must be roughened thoroughly and then wetted with a special two-component primer (rubber primer), otherwise no adhesion to the surface will be developed. The processing time is two to three minutes. No additional heating is necessary for curing. Surfaces coated with Urethan 85 SF are loadable after one hour. Full curing is completed after three hours. A special primer is available for coating metal surfaces.

► 540 g
10062978
cartridge





Technical Data

	Urethane 85	Urethane 85 SF
Characteristics		
Base	Polyurea	Polyurea
Texture	pasty	pasty
Colour	black	black
Minimum shelf life at room temperature	12 months	12 months
Processing		
Processing temperature	+15 °C to +40 °C	+15 °C to +40 °C
Component temperature	>3 °C above dew point	>3 °C above dew point
Relative air humidity	<70%	<70%
Mixing ratio by weight	10:100	10:100
Density of the mixture	1.1 g/cm ³	1.1 g/cm ³
Consumption Layer thickness 1.0 mm	1.1 kg/m ²	1.1 kg/m ²
Curing		
Pot life at 20 °C	20 min.	3 min.
working strength after 20 °C	6-8 h	1 h
Final strength (100% strength)	24 h	3 h
Mechanical properties after curing		
Tensile strength DIN EN ISO 527-2	7.8 MPa	8.4 N/mm ²
Elongation at break (tensile) DIN EN ISO 527-2	470%	590%
Tear resistance	31 kN/m	31 kN/m
Hardness (Shore A)	85	ca. 85±3
Thermal parameters		
Temperature resistance wet	-60 °C - +60 °C	-60 °C - +80 °C
Temperature resistance dry	-60 °C - +100 °C	-60 °C - +100 °C
Approvals / Guidelines		
IMPA-Code	551625	

1K PRIMER G

Bonding agent | easy to apply with a brush | for rubber surfaces

Special one-component primer for bonding rubber materials. 1K Primer G is used to prepare various rubber materials and surfaces before applying adhesives. To prepare other materials for bonding, such as metals or plastics, we recommend using our other special primers.

► 50 ml

10104191

1K Primer G

Characteristics	
Texture	viscous
Colour	black
Minimum shelf life at room temperature	18 months
Processing	
Processing temperature	up to +80 °C
Density of the mixture	0.9 g/cm ³
Consumption	150 - 200 g/m ²



Green Tube®

THE NEW MORE SUSTAINABLE PACKAGING

as an alternative to plastic cartridges. 100% recyclable cardboard cartridge.

Compared to conventional plastic cartridges
80%
LESS
PLASTIC



The tip and the lid are made from 100% recycled plastic.



The tube-shaped bag prevents soiling of the cardboard cartridge

The cartridge casing is made of 100% paper

Product	Art.-No. Green Tube		
		280 ml	Foil bag
MS-Polymers			
Flex 310 M® Classic	white	10104011	10104240
	grey	10104007	10104242
	black	10103997	10104244
Flex 310 M® Crystal		10104017	10104246
Windscreen Adhesive		10105032	10105030
Solar-Flex	white	10105046	10105044
	grey	10105039	10105037
Natural Stone Adhesive	white	10105025	10105023
	grey	10105018	10105016
Flex 310 M® HT-200		10104850	10104847
Flex 310 M® Stainless-Steel		10104893	10104890
Speed-Flex®	white	10104943	10104940
	grey	10104953	10104950
	black	10104963	10104960
Speed-Flex® Crystal		10104973	10104970
Flex 310 M® F1X	white	10105646	10105649
	grey	10102385	10104253
Polyurethanes			
Flex 310 PU	white	10104873	10104870
	grey	10104863	10104860
	black	10104883	10104880
Silicones			
Silicone A	white	10104913	10104910
	grey	10104903	10104900
	black	10104933	10104930
	transparent	10104924	10104921
Silicone LP	white	10104982	10104979
	transparent	10104992	10104989
Silicone N		10105011	10105008
HT 300		10104027	10104250
Black-Seal		10104022	10104248
Gasketmaker	red	10105055	10105052
	black	10105064	10105061
Assembly Adhesive			
Assembly Adhesive		10101911	10104259



Work with the
future now.

80%

LESS PLASTIC

compared to conventional plastic cartridges

Sustainable packaging as an alternative to plastic cartridges



With the Green Tube, we wanted to develop a real alternative to conventional sealant and adhesive cartridges, as these cannot be recycled after use due to product residues. Because of these residues, plastic cartridges are usually incinerated – and this additionally generates large amounts of climate-damaging CO₂.


The focus of our innovation: avoiding plastic waste by significantly reducing the proportion of plastic by 80%. The cartridge casing is made of 100% cardboard, which can be recycled after use.

The proportion of components that cannot be recycled has been reduced to a minimum. And that's not all: our cardboard cartridge produces 53% less CO₂ emissions in the manufacturing process than a standard PE cartridge.

Many advantages

The new WEICON Green Tube can be used with any standard cartridge gun and offers many advantages. Thanks to the tube-shaped bag, the shelf life of the product is extended by more than six months compared to PE cartridges – and this is achieved without any compromises in product quality or user-friendliness.

Easy to use

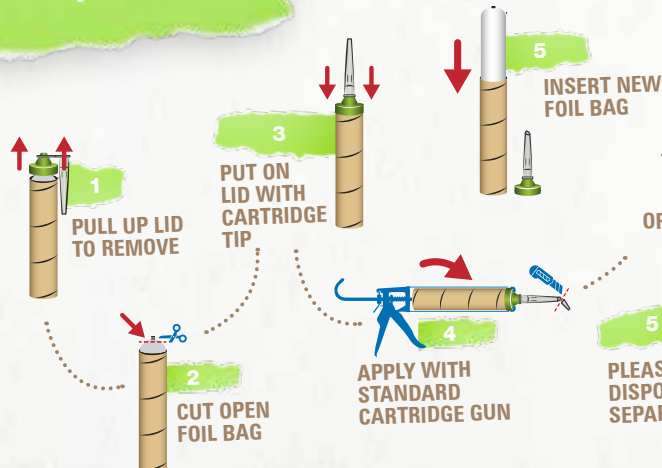

Simple disposal



PLASTIC RECYCLING*



* If the hardened product residue has been removed, the lid and tip can be disposed of as plastic waste for recycling. If the product residue has not been removed, the lid and tip must be disposed of as residual waste.

NATURAL STONE ADHESIVE

- ▶ fast
- ▶ strong adhesion
- ▶ for indoor & outdoor use

WEICON Natural Stone Adhesive is a strong adhesive for fixing natural stone, stone and ceramics. Thanks to its very high initial adhesion and rapid build-up of adhesive strength, bonding is even possible on vertical surfaces such as walls. The stone adhesive is suitable for many indoor and outdoor applications. It is frost-proof, has a high temperature resistance of -40 °C to +90 °C as well as high weather and UV resistance. The Natural Stone Adhesive hardens quickly and has a very high final strength. After curing, the adhesive can be sanded and remains elastic to compensate for movements. The stone adhesive is silicone-free, isocyanate-free, halogen-free and solvent-free.

It can be used in a wide variety of applications, e.g. for bonding window sills, tiles, skirting boards, decorative mouldings or stair treads. WEICON Natural Stone Adhesive adheres very well to a wide variety of materials, such as wood, wood-based materials, plastics, metals, glass and mineral substrates. It is available in grey and white.

	▶ 280 ml	▶ Set
white	10105025	10105028
grey	10105018	10105021

Technical Data Natural Stone Adhesive

Base		MS polymer
Colour		grey
Can be painted		only „wet on wet“ within 3 h at the latest
Cure type		moisture-curing
Texture		pasty
Stability/run-off		1 mm
Density		1.5 g/cm ³
Curing condition		from +5 °C to +40 °C and 30% to 95% rel. air humidity
Processing temperature		+5 °C to +40 °C
Curing speed		2-3 mm
Skin-over time		10 Min.
Gap bridging up to max.		10 mm
Max. sealing joint width		30 mm
Tensile strength	DIN EN ISO 527-2	1.6 N/mm ²
Elongation at break (tensile)	DIN EN ISO 527-2	121 %
Shear strength according to DIN EN 1465		
Galvanized steel		1.5 N/mm ²
Aluminium sandblasted		1.6 N/mm ²
Stainless steel V2A sandblasted		1.5 N/mm ²
Medium lap shear strength (DIN EN 1465/ASTM D 1002)		1.5 N/mm ²
Tear resistance	DIN 53515 / ASTM D 1002	13 kN/m
Volume change	DIN 52451	-2%
Hardness (Shore A)	DIN ISO 7619-1	56
E-modulus (tensile)	DIN EN ISO 527-2	0.7 N/mm ²
Temperature resistance		-40 °C to +90 °C
Building material class		B 2
Minimum shelf life	at room temperature	18 Mon.



ANTI-SEIZE

CERAMIC PASTE

WEICON Anti-Seize Ceramic Paste is a metal- and silicone-free synthetic high-performance assembly paste for universal use. The ceramic paste is resistant to high temperatures, has an exceptionally good release effect and is suitable for any material. The paste contains no free metals and is compatible with stainless steel and other nickel alloys (no chromium-6 formation). The assembly paste is especially suitable when metal-containing pastes can cause electrolytic reactions, when nickel-containing products should or may not be used for health reasons and when dark metal-containing products should or may not be used for visual reasons.

WEICON Anti-Seize Ceramic Paste provides excellent release, protection and lubrication even at high temperatures and high pressure. The paste offers very good protection against corrosion, wear and extreme weather conditions. The assembly paste can be used on bolts, screws, stud bolts, pipe connections, nuts, mechanical seals, etc. Typical areas of application are chemical plants, oil refineries, power stations, paper mills, steelworks and foundries as well as the shipping industry.

▶ 120 g ▶ 450 g ▶ 1 kg
10067867 10067869 10000208



- ▶ metal-free
- ▶ long-lasting protection against corrosion, seizure and wear
- ▶ no chromium-6 formation

Technical Data Anti-Seize Ceramic Paste

Base	Polyalphaolefin
Colour	white
Specific properties	free from calcium hydroxide
Density	1.2 g/ml
Silicone-free	yes
Four ball weld test property load DIN 51350	7,000 N
Four ball weld test weld load DIN 51350	7,500 N
Four ball weld test calotte value DIN 51350 (1min/1000N)	0.6 mm
Cone penetration DIN ISO 2137	approx. 247
Water resistance DIN 51807	1 - 90
Salt spray test DIN 50021/DIN 53167	> 500 h
Electrical resistance ASTM D 257	2.9 · 10 ¹¹ Ω·cm
Sulphur content DIN 51400	6 %
Temperature resistance	-40 °C to 1,400 °C

Friction values

Friction values steel-blank (M10 10.9)	
Total friction coefficient	0.15
Friction coefficients threads	0.17
Friction coefficient head	0.14
Friction value V4A (M10 A4 70)	
Total friction coefficient	0.17
Friction coefficients threads	0.16
Friction coefficient head	0.18
Friction value steel electro-galvanized (M10 10.9)	
Total friction coefficient	0.10
Friction coefficient threads	0.11
Friction coefficient head	0.09



CUTTING FLUID FOR STAINLESS STEEL

WEICON Cutting Fluid for Stainless Steel is a high-performance lubricant for all types of metalworking, both non-cutting and cutting. It reduces wear on workpieces and tools. It decreases friction and heat generation on metal parts. The transparent special oil extends the service life of cutting tools and drills. Thanks to its high adhesive strength, the pressure-resistant cutting fluid prevents drill tools from slipping and protects surfaces from damage. It increases the efficiency and precision of cutting tools, delivering optimal results. It is permanently temperature-resistant up to +200 °C.

It can be used in metalworking for all cutting operations such as drilling, turning, sawing, milling, reaming, threading or punching. The silicone-free spray is suitable for use on stainless steel, all types of steel, copper, aluminium, titanium, brass and cast iron. The drilling and cutting oil can be used in metalworking and many other industrial applications.

- ▶ high-performance lubricant
- ▶ reduces friction and wear
- ▶ silicone-free



▶ 400 ml
10105121

Technical Data Cutting Fluid for Stainless Steel

Odour	mineral oil
Colour	transparent
Specific properties	sound-absorbing
Silicone-free	yes
Kinematic viscosity (40 °C)	77 mm ² /s
Kinematic viscosity (100 °C)	8 mm ² /s
Temperature resistance	-40 °C to +200 °C
Shelf life	24 months





- ▶ enhances contrast
- ▶ highly versatile
- ▶ suitable for various types of lasers

LASER MARKING SPRAY

WEICON Laser Marking Spray was specially developed for high-quality, permanent and precise laser engravings. The spray is versatile in use and improves the contrast, legibility and quality of laser markings on a wide range of materials. It can be used on steel, stainless steel, copper, brass, aluminium, glass and ceramics.


When applied to the surface to be marked, the spray creates a thin, highly resistant layer. During laser marking, the material bonds with the surface to create a deep black, high-contrast marking that meets the highest standards. Thanks to the innovative formula, the spray produces an extremely scratch-resistant, chemically resistant and UV-resistant marking layer.

WEICON Laser Marking Spray is suitable for various laser types, such as CO₂ lasers, fibre lasers and diode lasers. It is used in industrial applications as well as for individual customisation and decoration. The spray withstands extreme temperatures ranging from -200 °C to +450 °C, with brief resistance up to +500 °C.

Compared to other marking methods, heat input is significantly reduced, which prevents any material deformation.

The laser spray can be used in industry to mark parts – facilitating traceability and identification. The laser engraving spray can be used to apply barcodes, serial numbers, type labels and QR codes to various materials. It is used for the customisation of promotional items, tools, equipment and objects made of metal, glassware and ceramic products. The spray allows logos and decorative designs to be laser marked onto various surfaces.

▶ 400 ml
10105130

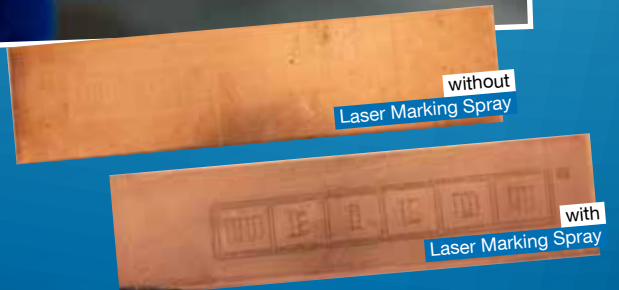

Technical Data Laser Marking Spray

Odour	solvent
Silicone-free	yes
Dust-dry	2-3 min.
Shelf life	24 months
Temperature resistance	-200 °C to +450 °C briefly up to 500 °C

CRIMPING TOOLS

ERGO

Rapid-change system

- ▶ quick insertion and removal of the modules
- ▶ tool-free, reliable connection
- ▶ time-saving switching process
- ▶ MC Multi Change System

High performance

- ▶ various modules made of high-quality steel (incl.)
- ▶ interchangeable insert 202 for MC4 plug 2.5/4/6 mm² AWG 14-10
- ▶ interchangeable insert 201 for ferrules 0.25-6 mm² AWG 24-10
- ▶ interchangeable insert 200 for insulated cable lugs from 0.5-6 mm² AWG 22-10

FAST
MULTI
CHANGE
SYSTEM

Design and ergonomics

- ▶ 2-component handle in "ice-crack design"
- ▶ maximum force transmission
- ▶ ergonomic and non-slip design
- ▶ excellent grip

Durable







- ▶ crimping force adjustable as needed which ensures a long service life
- ▶ precise eccentric setting for high crimping quality

Precision and efficiency

- ▶ precise work thanks to ratchet mechanism with blocking device
- ▶ reduced physical effort necessary, makes work easy
- ▶ with emergency unlocking mechanism in the handle, if required (misuse)
- ▶ precise and repeatable work for a consistently high crimping quality

Protection

- ▶ integrated eyelets for attaching a drop guard

Module number 200	0.5-6 mm ² 22-10 AWG		
Module number 201	0.25-6.0 mm ² 24-10 AWG		
Module number 202	2.5/4/6 mm ² 14-10 AWG		

Storage

- ▶ safe storage of the modules in a box
- ▶ faster access to the modules
- ▶ dust-protected storage

mm

g

Art.-No.

239

568

10100516



MULTI



Universal crimp tool for various types of electrical connections

- ▶ precise work thanks to ratchet mechanism with blocking device
- ▶ process-safe crimping – tool only opens after the crimping process
- ▶ emergency release in the handle (in the event of misuse)
- ▶ set of 3: modules for MC4 connectors/insulated wire end ferrules/insulated cable lugs
- ▶ modular Multi Change System for quick module changes
- ▶ eccentric setting for adjusting the crimping force
- ▶ comfortable feel thanks to 2-component handles

mm	g	Art.-No.
208	407	10100515

Module number 100	0.25-2,5 mm ² 24-14 AWG		
Module number 101	0.25-6,0 mm ² 24-10 AWG		
Module number 102	2.5/4/6 mm ² 14-10 AWG		

Storage

- ▶ safe storage of the modules in a box
- ▶ faster access to the modules
- ▶ dust-protected storage



MC4

For all standard solar connectors MC4 | 2.5 / 4 / 6 mm²

- ▶ precise work thanks to ratchet mechanism with blocking device
- ▶ process-safe crimping – tool only opens after the crimping process
- ▶ emergency release in the handle (in the event of misuse)
- ▶ modular Multi Change System for quick module changes
- ▶ eccentric setting for adjusting the crimping force
- ▶ comfortable feel thanks to 2-component handles

Module

102	2.5/4/6 mm ² 14-10 AWG		
------------	--------------------------------------	--	--



mm	g	Art.-No.
208	407	10100514




16 mm² HEX

hexagonal crimp facilitates insertion into round terminals

- ▶ precise work thanks to ratchet mechanism with blocking device
- ▶ process-safe crimping – tool only opens after the crimping process
- ▶ emergency release in the handle (in the event of misuse)
- ▶ working range from 0.5-16 mm² (AWG 20-5)
- ▶ serrated dies made from multi-hardened carbon steel
- ▶ eccentric setting for precisely adjustable crimping force
- ▶ comfortable feel thanks to 2-component handles

mm	g	mm ²	Art.-No.
222	610	0.5-16 (20-5 AWG)	10100513





SOLAR PV SET

With our comprehensive Solar PV set, you get everything you need for the professional electrical installation of photovoltaic systems. The set is made up of four specialised tools designed to help you install your photovoltaic system efficiently and professionally.

- Wire Stripper No. 5 Solar Pro
- Crimping tool MC4
- Cable Scissors No. 35
- MC4 Solar Spanner Set



 Length x Width x Height	 Weight	Art.-No.
340 x 280 x 55	1248	10105555

Green Line®

Stripping Tools made from up to 97% renewable materials



4in1 Flat and Round Cable Stripper

- ▶ circular cuts – stripping – longitudinal cuts – square cuts
- ▶ for all common round cables with a diameter of 6 to 13 mm
- ▶ stripping function integrated in the housing (from 0.5 to 6 mm²)
- ▶ for all common flat cables up to a width of 18 mm

mm	g	mm ²	Flat cable	Round cable	Art.-No.
164	106	0.5-6 (20-10 AWG)	18 mm	6-13 mm Ø	10105565



No. 5 Pro

- ▶ large, efficient working range from 0.2 mm² - 16 mm²
- ▶ precise working thanks to adjustable length stop (5-25 mm)
- ▶ integrated, easily accessible side cutter up to 3 mm Ø Cu/Al

mm	g	mm ²	Art.-No.
160	140	0.2-16 mm ² 24-5 AWG	10105558



No. 5 Solar Pro

- ▶ for the stripping and skinning of common photovoltaic cables with a cross-section of 1.5-10 mm²
- ▶ precise working thanks to adjustable length stop (5-25 mm)
- ▶ integrated, easily accessible side cutter up to 3 mm Ø Cu/Al

mm	g	mm ²	Art.-No.
160	140	1.5-10 (16-8 AWG)	10105561



LED WORK LIGHT



Compact design

- ▶ housing made of polycarbonate
- ▶ water and dust resistance according to IP 65
- ▶ small, lightweight and robust

LED

- ▶ luminous flux in lumen 250 lm
- ▶ excellent visibility when stripping cables in dark rooms or in outdoor areas

DESIGNED & DEVELOPED
IN GERMANY

Light functions

- ▶ adjustable in three levels
- ▶ flush-mounted integrated switch
- ▶ fully illuminates the work area

Modular

- ▶ the housing can be attached to many WEICON TOOLS Wire Strippers as an upgrade
- ▶ suitable for: No. 5, No. 5 Pro, No. 5 Classic, No. 5 Green Line, No. 5 Solar Pro, No. 7 Magic, No. 7F, No. 7 Solar

MOUNTABLE ON BOTH SIDES



Power supply

- ▶ lithium-battery (rechargeable with supplied USB-C cable)
- ▶ charging port protected with dust cap

Battery

- ▶ maximum runtime (for 2nd level): 2 hours
- ▶ charging time: approx. 40 minutes
- ▶ battery capacity: 180 mAh
- ▶ lithium-battery



Scope of delivery

- ▶ incl. USB-C connection cable
- ▶ instruction manual



mm	g	Colour	Art.-No.
48	15	Red ●	10100517
		Black ●	10101948

LED SETS



Wire Stripper No. 5 LED Set

- Wire Stripper No. 5
- LED Work Light

Art.-No.

10101936



Wire Stripper No. 5 Pro LED Set

- Wire Stripper No. 5 Pro
- LED Work Light

Art.-No.

10101937



Wire Stripper No. 5 Solar Pro LED Set

- Wire Stripper No. 5 Solar Pro
- LED Work Light

Art.-No.

10101938



Wire Stripper No. 5 Green Line LED Set

- Wire Stripper No. 5 Green Line
- LED Work Light

Art.-No.

10101947

Green Tube®

Compared to conventional plastic cartridges
80%
 LESS PLASTIC

**100% RECYCLABLE
 CARDBOARD CARTRIDGE**



**WEICON GmbH & Co. KG
 (Headquarters)**

Königsberger Str. 255 · DE-48157 Münster
 P.O. Box 84 60 · DE-48045 Münster
 Germany
 phone +49 (0) 251 9322 0
 WhatsApp + 49 (0) 251 9322 393
 info@weicon.de

WEICON Middle East L.L.C.

Jebel Ali Ind Area 1
 P.O. Box 118 216 · Dubai
 United Arab Emirates
 phone +971 4 880 25 05
 info@weicon.ae

WEICON Inc.

20 Steckle Place · Unit 20
 Kitchener · Ontario N2E 2C3 · Canada
 phone +1 877 620 8889
 info@weicon.ca

WEICON Kimya Sanayi Tic. Ltd. Şti.

Orhan Gazi Mahallesi 16. Yol Sokak No: 6
 34538 Hadimköy-Esenyurt · Istanbul
 Türkiye
 phone +90 (0) 212 465 33 65
 info@weicon.com.tr

WEICON Romania SRL

Str. Podului Nr. 1
 547176 Budiu Mic (Targu Mures) · Romania
 phone +40 (0) 3 65 730 763
 office@weicon.com

WEICON SA (Pty) Ltd

Unit No. D1 · Enterprise Village
 Capricorn Drive · Capricorn Park
 Muizenberg 7945 (Cape Town) · South Africa
 phone +27 (0) 21 709 0088
 info@weicon.co.za

WEICON South East Asia Pte Ltd

7 Soon Lee Street
 #01-11 iSPACE · Singapore 627608
 phone (+65) 6710 7671
 info@weicon.com.sg

WEICON Czech Republic s.r.o.

Teplická 305
 CZ-417 61 Teplice-Bystřany
 Česká republika
 phone +42 (0) 417 533 013
 info@weicon.cz

WEICON Ibérica S.L.

Av. del Camino de lo Cortao, 30
 nave 22, San Sebastián de los Reyes
 28703 Madrid · Spain
 phone +34 (0) 914 7997 34
 info@weicon.es

WEICON Italia S.r.L.

Via Gelasio Adamoli, 35
 16141 Genova · Italy
 phone +39 010 2924 871
 info@weicon.it

WEICON Colombia S.A.S

Calle 19, 43b-64
 Medellín · Colombia
 phone +57 310 837 37 99
 info@weicon.co

WEICON Australia Pty Ltd

Lot 9 · Unit 3, 55-65 Christensen Road
 Stapylton · QLD 4207 · Australia
 phone +61 (0) 452 553 384
 info@weicon.com.au

www.weicon.com



Distributed by:

**Focus Products
 2026**

Art.-No. 10105922

Any product specifications and recommendations given herein must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, even adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.