

# WEICONLOCK® AN 302-43 Threadlocking



## Threadlocking |DVGW and drinking water approval

- higher viscosity
- medium strength
- disassembly with normal tools

### Technical Data

Colour	blue
Fluorescent	yes
For thread connections up to	M 36
Viscosity	2.000 - 7.000 mt mPa·s
Gap bridging up to max.	0,25 mm
Breakaway torque	17 - 22 Nm
Prevail torque	8 - 12 Nm
Shear strength Nmm <sup>2</sup> (DIN 54452)	9 - 13 N/mm <sup>2</sup>
Handling strength	10 - 20 min.
Final strength (100 % strength)	1-3 h
Temperature resistance	-60°C to +200°C
Minimum shelf life at room temperature	24 mon.
Compressive strength (free cutting steel / grub screw = 8.8)	
M 3x6 max.	1.500 bar
M 4x6 max.	1.500 bar
M 5x8 max.	1.500 bar
M 6x10 max.	1.500 bar
M 8x12 max.	900 bar
M 10x16 max.	100 bar

### Breakaway torque per material

Stainless steel V2A	9,2 Nm
Stainless steel V4A	17,8 Nm
Galvanised steel	19,0 Nm
Aluminium	9,5 Nm


### Torque per material

Stainless steel V2A	5,1 Nm
Stainless steel V4A	11,7 Nm
Galvanised steel	9,2 Nm
Aluminium	7,5 Nm

### Approvals / Guidelines

NSF	S4 (FDA 21 CFR)
Hygiene Institute	UBA KTW-BWGL
ISSA Code	75.628.06/04/05
IMPA Code	812912/13/14


### Reaction rate of various materials

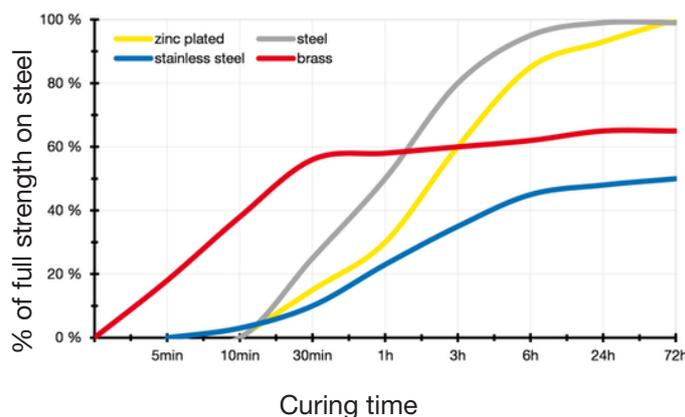

### Surface Pre-Treatment

To achieve optimum results, the mounting parts should be degreased and cleaned, e.g. with WEICON Surface (roughen the surfaces, if required). WEICONLOCK can also be used on uncleaned surfaces, e.g. screws as delivered. However, the cleaner the surface, the better the results achieved.

### Reaction with activator F

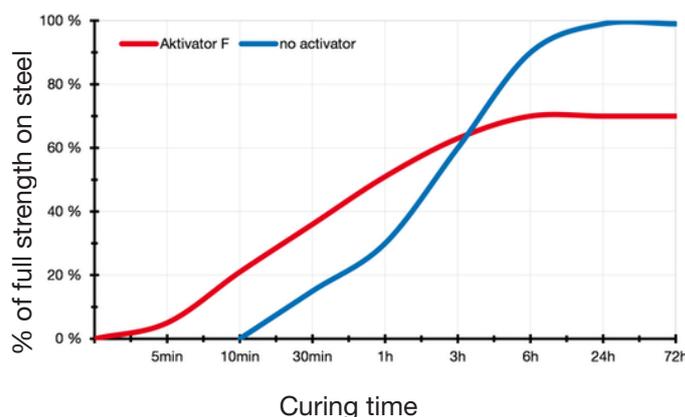

### Application

WEICONLOCK is applied evenly straight from the Pen with the help of the dosing tip; avoid direct contact between dosing tip

### Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

# WEICONLOCK® AN 302-43 Threadlocking

## Threadlocking

/metal. For sealing applications, apply WEICONLOCK to the thread in circles. Assemble parts and screw tight. Do not pour any WEICONLOCK back into the bottle that has already come into contact with metal. Even extremely small metal particles cause the adhesive to cure inside the bottle. Therefore, in serial production, the use of dosing devices is recommended.

### Mixing

not necessary

### Curing

In the absence of oxygen and in contact with metal ions in a few seconds to minutes.

### Storage

Store WEICONLOCK in the unopened original container at room temperature. Avoid sources of heat and direct sunlight. The air inside the packaging helps maintain storage stability.


### Instructions for use

When using WEICON products, the physical, safety-related, toxicological and ecological data and regulations in our EC safety data sheets ([www.weicon.com](http://www.weicon.com)) must be observed.

### Available sizes

10000611	WEICONLOCK® AN 302-43 Threadlocking, 3 ml, blue
10016419	WEICONLOCK® AN 302-43 Threadlocking, 20 ml, blue
10017876	WEICONLOCK® AN 302-43 Threadlocking, 50 ml, blue
10019968	WEICONLOCK® AN 302-43 Threadlocking, 200 ml, blue
10030474	WEICONLOCK® AN 302-43 Threadlocking, 10 ml, blue

Strength in heat

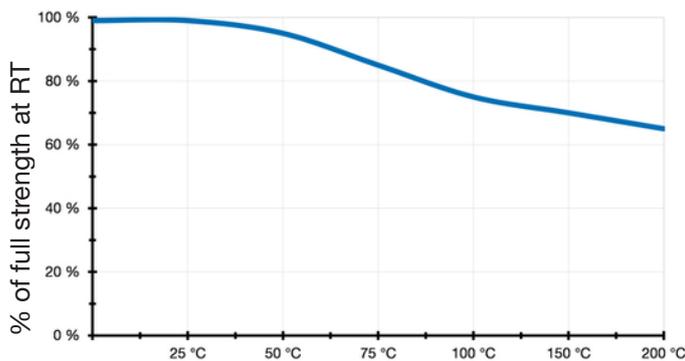

### Accessories

- 10021433 Activator F, 200 ml, green
- 10001256 Dosing Tip L Size 1, 1 PCE

To the product detail page:



Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICON Middle East L.L.C.  
United Arab Emirates  
phone +971 4 880 25 05  
info@weicon.ae

WEICON Czech Republic s.r.o.  
Czech Republic  
phone +42 (0) 417 533 013  
info@weicon.cz

WEICON GmbH & Co. KG  
(Headquarters) Germany  
phone +49 (0) 251 9322 0  
info@weicon.de

WEICON Romania SRL  
Romania  
phone +40 (0) 3 65 730 763  
office@weicon.com

WEICON South East Asia Pte Ltd  
Singapore  
Phone (+65) 6710 7671  
info@weicon.com.sg

WEICON Inc.  
Canada  
phone +1 877 620 8889  
info@weicon.ca

WEICON Ibérica S.L.  
Spain  
phone +34 (0) 914 7997 34  
info@weicon.es

WEICON Italia S.r.l.  
Italy  
phone +39 (0) 010 2924 871  
info@weicon.it

WEICON SA (Pty) Ltd  
South Africa  
phone +27 (0) 21 709 0088  
info@weicon.co.za

WEICON Kimya Sanayi Tic. Ltd. Şti.  
Türkiye  
phone +90 (0) 212 465 33 65  
info@weicon.com.tr