

WEICON WP



Pasty | high strength | ceramic-filled | extremely high resistance against abrasion and wear | residual elasticity and impact-resistant

WEICON WP serves as protection for highly stressed surfaces. A coating with the epoxy resin system offers high strengths against wear and abrasion and is extremely resistant to chemicals. Plastic Metal WEICON WP prevents metal loss and replaces previously applied wear-resistant alloys, ceramic tiles and rubber linings as well as welded metal coatings. It can be used either for the regeneration of worn metal surfaces or as a wear-resistant coating. A particularly high level of protection is achieved when the wear is caused by particles hitting sideways.

Characteristics

Base	Epoxy
Filler	Ceramicbeads
Texture	pasty
Colour	grey
Minimum shelf life	at room temperature
	36 mon.
Processing	
Processing temperature	+15°C to +40°C
Component temperature	>3 °C above dew point
Relative air humidity	< 85 %
Mixing ratio by weight	100:100
Mixing ratio by volume	100:100
Viscosity of the mixture	at +25 °C
	900.000 mPa·s
Density of the mixture	
	2,2 g/cm³
Consumption	Layer thickness 1.0 mm
	2.2 kg/m²
Max. layer thickness	per step
	20 mm
Curing	
Pot life	at 20 °C, 2 kg batch
	30 min.
Additional layer after	(35 % strength)
	7 h
Working strength after	(80 % strength)
	12 h
Final strength	(100 % strength)
	36 h
Shrinkage	
	0,11 %

Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICON WP

and, if possible, left to rest overnight so that all salts can be dissolved from the metal. Before each application of WEICON WP, a test for soluble salts should be carried out according to the Bresle method (DIN EN ISO 8502-6). The maximum amount of soluble salts remaining on the substrate should not exceed 40 mg/m². Heating and repeated blasting of the surface may be necessary to remove all soluble salts and moisture. After each mechanical pre-treatment, the surface should be cleaned again with WEICON Cleaner Spray S and protected from further contamination until the coating is applied. Areas where no adhesion to the substrate is desired must be treated with silicone-free mould release agents. For smooth surfaces, we recommend WEICON Mould Release Agent Liquid F 1000 or, for porous surfaces, WEICON Mould Release Agent Wax P 500. After the surface pre-treatment, WEICON WP should be applied as soon as possible (within one hour) to avoid oxidation, flash rust or new contamination.

Mixing

First, stir the resin. Then mix the resin and hardener together thoroughly and bubble-free for at least four minutes at 20°C (68°F). The included processing spatula or a mechanical mixer, such as a mortar stirrer, can be used for this purpose. With mechanical mixers, a low speed of max. 500 rpm should be used. The components should be stirred until a homogeneous mixture is achieved. The mixing ratio of the two components must be strictly observed, as otherwise, strongly deviating physical values will result (max. deviation +/- 2%). Only prepare a batch as large as can be processed within the pot life of 30 minutes. The specified pot life refers to a material batch of 2 kg and 20°C (68°F) material temperature. Mixing larger quantities or higher processing temperatures will result in faster curing due to the typical reaction heat of epoxy resins.

Application


For processing, we recommend an ambient temperature of 20°C (68 °F) at less than 85% relative humidity. For a thin pre-coat, work WEICON WP intensively into the surface in crosswise layers using the Contour Spatula Flexy to achieve maximum adhesion. By means of this technique, the epoxy resin penetrates well into all cracks and roughness depths. Afterwards, further applications can be carried out straight away, until the desired layer thickness is reached. Make sure that the epoxy resin is applied evenly and without air bubbles. To fill large gaps or holes, expanded metal or other mechanical fixing materials should be used. Finally, the surface can be smoothed easily with the help of a PE film and a rubber roller.

Curing

Final hardness is reached after 36 hours at 20°C (68°F) at the latest. At lower temperatures, the curing can be accelerated by evenly applying heat up to max. 40°C (104°F), e.g. with a heating pack, hot air blower or fan heater. Higher temperatures shorten the curing time. The following rule of thumb applies: Each increase by +10°C (50°F) above room

temperature (20°C/68°F) will decrease the curing time by half. Temperatures below 16°C (61°F) increase the curing time, until at approx. 5°C (41°F) and below, almost no reaction will take place at all.

Increase in strength

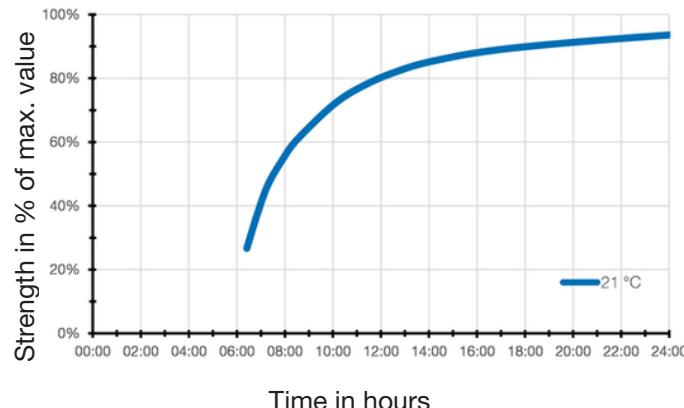

Storage

WEICON Epoxy Resin Systems should be stored in a dry place at room temperature. Unopened containers can be stored at temperatures from +18 °C to +28 °C. Opened containers must be used up within 6 months.

Scope of delivery

Processing Spatula | Contour Spatula Flexy | Instructions for use | Gloves | Resin & Hardener

Accessories

10000147	Cleaner Spray S, 500 ml, transparent
10000347	Cleaner S, 5 L, colourless, transparent
10024313	Surface Cleaner, 400 ml, transparent
10025288	Surface Cleaner, 5 L, transparent
10026647	Mould Release Agent Liquid F 1000, 250 ml, white, milky
10026712	Mould Release Agent Wax P 500, 150 g
10053995	Repair Stick Multi-Purpose, 115 g, vintage white
10000913	Glass Fibre Cloth Tape, 1 PCE, white
10010887	Processing Spatula, 1 PCE
10022562	Processing Spatula, 1 PCE
10016002	Pump Dispenser WPS 1500, 1 PCE
10039667	Cable Scissors No. 35, 1 PCE
10045523	Processing Kit, 1 PCE

Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICON WP

Recommended equipment

Angle grinder	Fabric tape
Blast machine	Brush
Heat pocket	Foam roller
Hot or fan heater	Rubber roller
Smoothing trowel, spatula	Lint-free cloth
PE film 0.2 mm	

Conversion table

(°C x 1.8) + 32 = °F	Nm x 8.851 = lb·in
mm/25.4 = inch	Nm x 0.738 = lb·ft
µm/25.4 = mil	Nm x 141.62 = oz·in
N x 0.225 = lb	mPa·s = cP
N/mm² x 145 = psi	N/cm x 0.571 = lb/in
MPa x 145 = psi	kV/mm x 25.4 = V/mil

Available sizes

10032320	WEICON WP, 2 kg, grey
10032939	WEICON WP, 10 kg, grey
10054399	WEICON WP, 200 g, grey

	WEICON A	WEICON B	WEICON BR	WEICON C	WEICON F	WEICON F2	WEICON HB 300	WEICON HT 111	WEICON SF	WEICON ST	WEICON TI	WEICON UW	WEICON WR2	WEICON HP	WEICON Fire Safe	WEICON Anti-Static	WEICON Food Grade	WEICON Anti-Stick	WEICON Ceramic BL	WEICON GL	WEICON GL-S	WEICON Ceramic W	WEICON Ceramic HC 220	WEICON WP	WEICON WR	WEICON CBC
Repair and moulding	x	x	x	x	x	x	x	x	x	x	x	x	x													
Adhesive				x	x		x	x		x				x	x											
Wear, erosion and corrosion protection – abrasion-resistant coating															x	x	x	x	x	x	x	x	x	x		
Casting, relining and gap compensation – casting and injecting potting compound	x					x							x											x	x	

To the product detail page:



Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICON WP

Chemical resistance after curing* (Excerpt)

Exhaust fumes	+	Potassium carbonate	+
Acetone	o	Potassium hydroxide 0-20 % (caustic potash)	+
Ethyl ether	+	Milk of lime	+
Ethyl alcohol	o	Carbolic acid	-
Ethylbenzene	-	Creosote oil	-
Alkalies (alkaline substances)	+	Cresylic acid	-
Hydrocarbons, aliphatic (petroleum derivatives)	+	Magnesium hydroxide	+
Formic acid >10 % (methanoic acid)	-	Maleic acid (cis-ethylenedicarboxylic acid)	+
Ammonia anhydrous 25%	+	Methanol (methyl alcohol) <85 %	-
Amyl acetate	+	Mineral oil	+
Amyl alcohol	+	Naphthalene	-
Hydrocarbons, aromatic (benzene, toluene, xylene)	+	Naphthene	-
Barium hydroxide	+	Sodium carbonate (soda)	+
Petrol (92-100 octane)	+	Sodium bicarbonate (sodium hydrogen carbonate)	+
Hydrobromic acid <10 %	+	Sodium chloride (table salt)	+
Butyl acetate	+	Sodium hydroxide >20 % (caustic soda)	o
Butyl alcohol	+	Caustic soda	+
Calcium hydroxide (slaked lime)	+	Heating oil, diesel	+
Chloroacetic acid	-	Oxalic acid <25 % (ethanedioic acid)	+
Chloroform (trichlormethane)	o	Perchloroethylene	o
Chlorosulphuric acid (wet and dry)	-	Kerosene	+
Chlorinated water (swimming pool concentration)	+	Oils, vegetable and animal	+
Hydrochloric acid	+	Phosphoric acid <5%	+
Chromium bath	+	Phthalic acid, phthalic anhydride	+
Chromic acid	+	Crude oil	+
Diesel fuels	+	Nitric acid <5%	o
Mineral oil and mineral oil products	+	Hydrochloric acid <10 %	+
Acetic acid diluted <5%	+	Sulphur dioxide (wet and dry)	+
Ethanol <85 % (ethyl alcohol)	+	Carbon disulphide	+
Greases, oils and waxes	+	Sulphuric acid <5%	o
Hydrofluoric acid diluted	o	White spirit	+
Tannic acid diluted <7%	+	Carbon tetrachloride (tetrachloromethane)	+
Glycerin (trihydroxipropane)	+	Tetralin (tetrahydronaphthalene)	o
Glycol	o	Toluene	-
Humic acid	+	Trichloroethylene	o
Impregnating oils	+	Hydrogen peroxide <30 % (hydrogen superoxide)	+
Potash	+	Xylene	-

+ = resistant 0 = for a limited time - = not resistant *The storage of all WEICON Plastic Metal types was carried out at +20°C chemical temperature.

Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.