

# WEICONLOCK® AN 305-18 Flange sealing



## Flange sealing for filling large gaps with immediate sealing effect | high-temperature-resistant

- high viscosity
- high strength
- hard to disassemble

### Technical Data

Colour	red
Fluorescent	yes
Viscosity	80.000 - 500.000 ht mPa·s
Gap bridging up to max.	0,5 mm
Breakaway torque	12 - 18 Nm
Prevail torque	18 - 24 Nm
Shear strength Nmm <sup>2</sup> (DIN 54452)	8 - 13 N/mm <sup>2</sup>
Handling strength	10 - 20 min.
Final strength (100 % strength)	3 - 6 h
Temperature resistance	-60°C to +200°C
Minimum shelf life	at room temperature
Compressive strength (free cutting steel / grub screw = 8.8)	
M 3x6	max.
M 4x6	max.
M 5x8	max.
M 6x10	max.
M 8x12	max.
M 10x16	max.

### Approvals / Guidelines

IMPA Code	331077
MIL-Spec	complies with MIL-A-46106 MIL-A-46146

**Note**  
The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICON Middle East L.L.C.  
United Arab Emirates  
phone +971 4 880 25 05  
info@weicon.ae

WEICON Inc.  
Canada  
phone +1 877 620 8889  
info@weicon.ca

WEICON Czech Republic s.r.o.  
Czech Republic  
phone +42 (0) 417 533 013  
info@weicon.cz

WEICON Ibérica S.L.  
Spain  
phone +34 (0) 914 7997 34  
info@weicon.es

WEICON GmbH & Co. KG  
(Headquarters) Germany  
phone +49 (0) 251 9322 0  
info@weicon.de

WEICON Italia S.r.l.  
Italy  
phone +39 (0) 010 2924 871  
info@weicon.it

WEICON Romania SRL  
Romania  
phone +40 (0) 3 65 730 763  
office@weicon.com

WEICON SA (Pty) Ltd  
South Africa  
phone +27 (0) 21 709 0088  
info@weicon.co.za

WEICON South East Asia Pte Ltd  
Singapore  
Phone (+65) 6710 7671  
info@weicon.com.sg

WEICON Kimya Sanayi Tic. Ltd. Şti.  
Türkiye  
phone +90 (0) 212 465 33 65  
info@weicon.com.tr


### Surface Pre-Treatment

Clean surfaces to be sealed.

### Application

WEICONLOCK is applied evenly straight from the Pen/the cartridge; avoid direct contact between dosing tip/metal. Apply continuous bead to one flange side, then assemble parts quickly and screw tight. For sealing applications (pipe fittings), apply WEICONLOCK to the thread in circles. Screw the pipe thread together and tighten it to the desired alignment. Do not pour any WEICONLOCK back into the bottle that has already come into contact with metal. Even extremely small metal particles cause the adhesive to cure inside the bottle. Therefore, in serial production, the use of dosing devices is recommended.

### Reaction speed at temp.

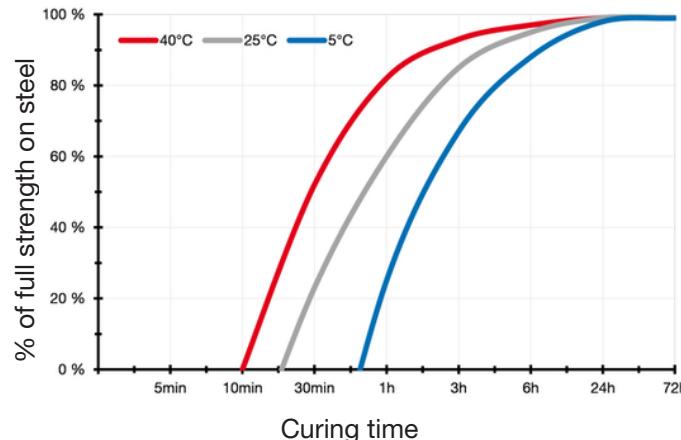

### Storage


Store WEICONLOCK in the unopened original container at room temperature. Avoid sources of heat and direct sunlight. The air inside the packaging helps maintain storage stability.

### Instructions for use

When using WEICON products, the physical, safety-related, toxicological and ecological data and regulations in our EC safety data sheets ([www.weicon.com](http://www.weicon.com)) must be observed.

# WEICONLOCK® AN

## 305-18 Flange sealing

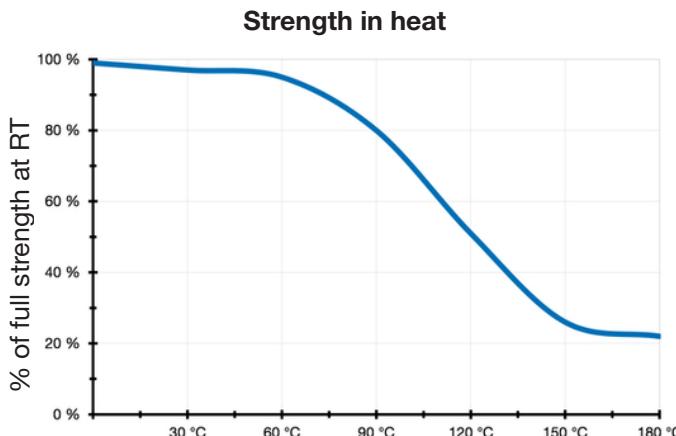

### Accessories

10021433 Activator F, 200 ml, green  
 10001256 Dosing Tip, 1 PCE

### Available sizes

10010537 WEICONLOCK® AN 305-18 Flange sealing, 50 ml, red  
 10010541 WEICONLOCK® AN 305-18 Flange sealing, 250 ml, red  
 10019591 WEICONLOCK® AN 305-18 Flange sealing, 300 ml, red  
 10019941 WEICONLOCK® AN 305-18 Flange sealing, 50 ml, red  
 10019999 WEICONLOCK® AN 305-18 Flange sealing, 200 ml, red

To the product detail page:



### Note

The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICON Middle East L.L.C.  
 United Arab Emirates  
 phone +971 4 880 20 05  
 info@weicon.ae

WEICON Inc.  
 Canada  
 phone +1 877 620 8889  
 info@weicon.ca

WEICON Czech Republic s.r.o.  
 Czech Republic  
 phone +42 (0) 417 533 013  
 info@weicon.cz

WEICON Ibérica S.L.  
 Spain  
 phone +34 (0) 914 7997 34  
 info@weicon.es

WEICON GmbH & Co. KG  
 (Headquarters) Germany  
 phone +49 (0) 251 9322 0  
 info@weicon.de

WEICON Italia S.r.l.  
 Italy  
 phone +39 (0) 010 2924 871  
 info@weicon.it

WEICON Romania SRL  
 Romania  
 phone +40 (0) 3 65 730 763  
 office@weicon.com

WEICON SA (Pty) Ltd  
 South Africa  
 phone +27 (0) 21 709 0088  
 info@weicon.co.za

WEICON South East Asia Pte Ltd  
 Singapore  
 Phone (+65) 6710 7671  
 info@weicon.com.sg

WEICON Kimya Sanayi Tic. Ltd. Şti.  
 Türkiye  
 phone +90 (0) 212 465 33 65  
 info@weicon.com.tr