

WEICONLOCK® AN 305-42 Hydraulic and Pneumatic Sealing



Hydraulic and pneumatic sealing | DVGW approval

- medium viscosity
- medium strength
- disassembly with normal tools

Technical Data


Colour	brown	
Fluorescent	yes	
For thread connections up to	M 20 R ¾"	
Viscosity	500 nt mPa·s	
Gap bridging up to max.	0,15 mm	
Breakaway torque	12 - 15 Nm	
Prevail torque	18 - 22 Nm	
Shear strength Nmm ² (DIN 54452)	8 - 12 N/mm ²	
Handling strength	10 - 20 min.	
Final strength (100 % strength)	2-4 h	
Temperature resistance	-60°C to +150°C	
Minimum shelf life	at room temperature 24 mon.	
Compressive strength (free cutting steel / grub screw = 8.8)		
M 3x6	max.	1500 bar
M 4x6	max.	1500 bar
M 5x8	max.	1500 bar
M 6x10	max.	1200 bar
M 8x12	max.	800 bar
M 10x16	max.	700 bar

Approvals / Guidelines


ISSA Code	75.628.10/11/12
IMPA Code	812918/19/20

Pipe and thread sealant

Reaction rate of various materials

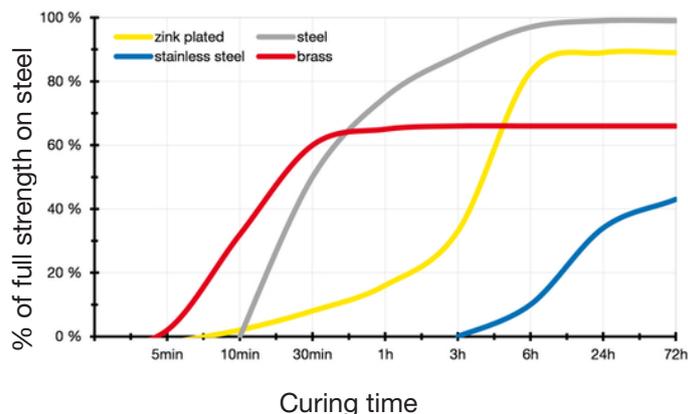


Reaction rate at different gaps

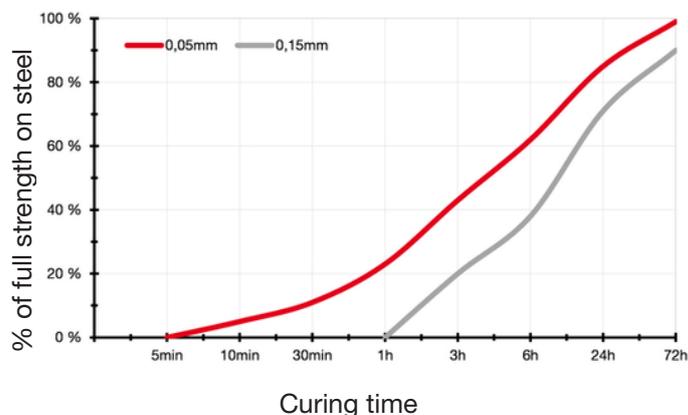

Surface Pre-Treatment

To achieve optimum results, the mounting parts should be degreased and cleaned, e.g. with WEICON Surface (roughen the surfaces, if required). WEICONLOCK can also be used on uncleaned surfaces, e.g. screws as delivered. However, the cleaner the surface, the better the results achieved.

Reaction with activator F

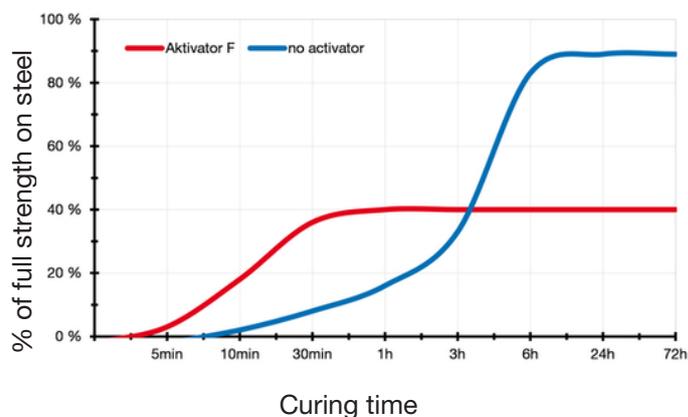

Note
The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.

WEICONLOCK® AN 305-42 Hydraulic and Pneumatic Sealing

WEICONLOCK®

Pipe and thread sealant


Application

WEICONLOCK is applied evenly straight from the Pen with the help of the dosing tip; avoid direct contact between dosing tip/metal. Apply WEICONLOCK to the thread in circles. Screw the pipe thread together and tighten it to the desired alignment. When used as flange sealing, apply a continuous bead to one flange side, then assemble parts quickly and screw tight. Do not pour any WEICONLOCK back into the bottle that has already come into contact with metal. Even extremely small metal particles cause the adhesive to cure inside the bottle. Therefore, in serial production, the use of dosing devices is recommended.


Instructions for use

When using WEICON products, the physical, safety-related, toxicological and ecological data and regulations in our EC safety data sheets (www.weicon.com) must be observed.

Reaction rate of various materials

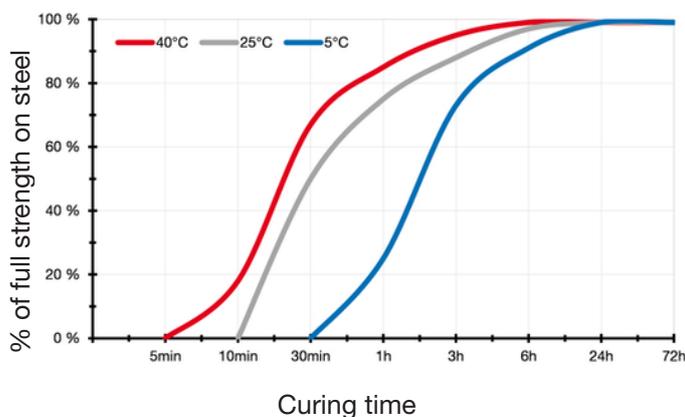

Reaction speed at temp.

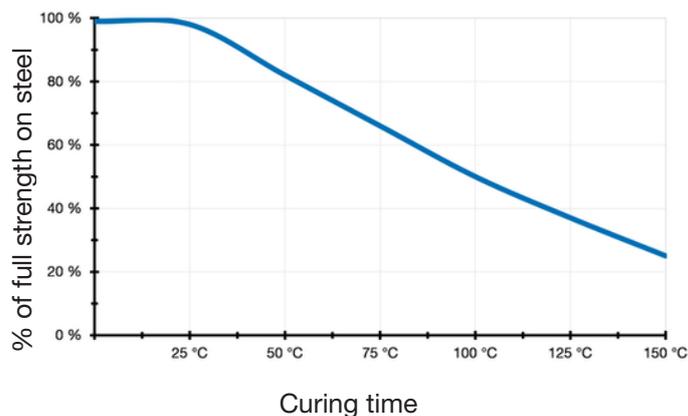

Storage

Store WEICONLOCK in the unopened original container at room temperature. Avoid sources of heat and direct sunlight. The air inside the packaging helps maintain storage stability.


Accessories

- 10021433 Activator F, 200 ml, green
- 10001256 Dosing Tip L Size 1, 1 PCE

Available sizes

- 10016437 WEICONLOCK® AN 305-42 Hydraulic and Pneumatic Sealing, 20 ml, brown
- 10017877 WEICONLOCK® AN 305-42 Hydraulic and Pneumatic Sealing, 50 ml, brown
- 10020001 WEICONLOCK® AN 305-42 Hydraulic and Pneumatic Sealing, 200 ml, brown

Heat aging

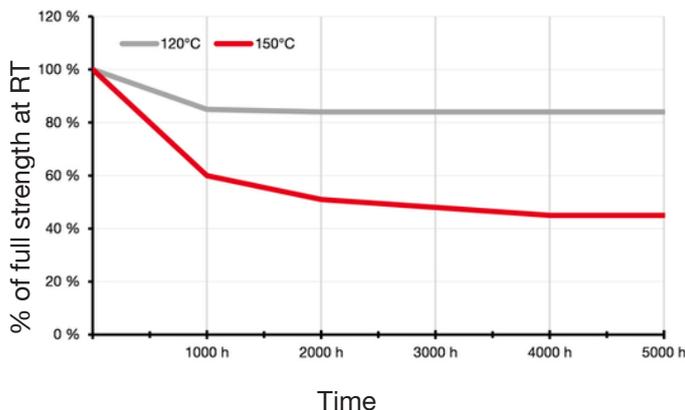

To the product detail page:



Note
The specifications and recommendations given in this technical data sheet must not be seen as guaranteed product characteristics. They are based on our laboratory tests and on practical experience. Since individual application conditions are beyond our knowledge, control and responsibility, this information is provided without any obligation. We do guarantee the continuously high quality of our products. However, own adequate laboratory and practical tests to find out if the product in question meets the requested properties are recommended. A claim cannot be derived from them. The user bears the only responsibility for non-appropriate or other than specified applications.